




Features

- Designed for RCO-1000 & BCO-1000 models only
- 4x USB 2.0, Type A Ports (with USB hub)
- 50x-pin High-Speed I/O Connection
- Occupies 1x EDGEBoost Bracket
- Stackable and Scalable Design (specific configuration only)

Specifications

Interface	50x-pin High-Speed I/O Connection
Additional I/O	4x USB 2.0, Type A Ports (with USB hub)
I/O Bracket	Occupies 1x EDGEBoost Bracket
Special Features	Stackable and Scalable Design (specific configuration only for RCO-1000 and BCO-1000 Models)
Standards and Certifications	UL, CE, FCC Class A

Dimension (Unit: mm)

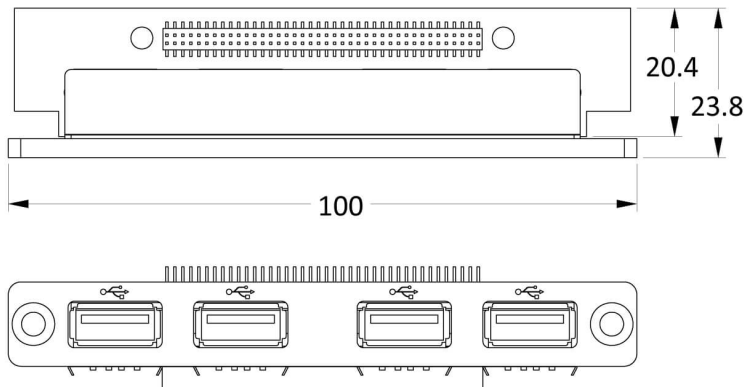

External I/O Mechanical Layout

