

USER'S MANUAL

WCO-3200 Series IP65/IP67 Waterproof Systems



Table of Contents

Prefaces	04
Revision	04
Disclaimer	04
Copyright Notice	04
Trademarks Acknowledgment	04
Environmental Protection Announcement	04
Safety Precautions	05
Technical Support and Assistance	06
Conventions Used in this Manual	06
Package Contents	07
Ordering Information	07
Optional Accessory	07
Chapter 1 Product Introductions	08
1.1 Overview	09
1.1.1 Key Feature	09
1.2 Hardware Specification	10
1.3 System I/O	11
1.3.1 WCO-3200	11
1.3.2 WCO-3200-IP67	12
1.4 Mechanical Dimensions	13
1.4.1 WCO-3200	13
1.4.2 WCO-3200-IP67	13
Chapter 2 Connectors	14
2.1 Connector Locations	15
2.1.1 Top View	15
2.1.2 Bottom View	16
2.2 Connector Definition	17
Chapter 3 System Setup	20
3.1 Set torque force to 3.5 kgf-cm to execute all the screwing and unscrewing	21
3.2 Installing SODIMM	21
3.3 Installing HDD on internal SATA HDD bay	23
3.4 Removing chassis bottom cover	24
3.5 Installing mini PCIe card / mSATA	25
3.6 Installing antenna	26
3.7 Assemble chassis bottom cover	28
3.8 Assemble waterproof cable	29

Chapter 4	BIOS Setup	32
4.1	BIOS Introduction	33
4.2	Main Setup	34
4.2.1	System Date	34
4.2.2	System Time	34
4.3	Advanced Setup	35
4.3.1	Trusted Computing (Optional)	35
4.3.2	ACPI Settings	35
4.3.3	Super IO Configuration	35
4.3.4	Hardware Monitor	40
4.3.5	Serial Port Console Redirection	41
4.3.6	CPU Configuration	41
4.3.7	Network Stack Configuration	42
4.3.8	CSM Configuration	43
4.3.9	SATA Configuration	44
4.3.10	USB Configuration	45
4.4	Chipset	46
4.4.1	North Bridge	46
4.4.2	South Bridge	48
4.5	Security	50
4.5.1	Administrators Password	50
4.5.2	Users Password	50
4.6	Boot	51
4.6.1	Setup Prompt Timeout	51
4.6.2	Bootup NumLock State	51
4.6.3	Full Screen Logo Show	51
4.6.4	Boot Option Priorities	51
4.7	Save & Exit	52
4.7.1	Save Changes and Reset	52
4.7.2	Discard Changes and Reset	52
4.7.3	Restore Defaults	52
Appendix	WDT & GPIO	53
	WDT Sample Code	54
	GPIO Sample Code	55

Prefaces

Revision

Revision	Description	Date
1.0	Manual Released	2019/06/28
1.1	New-added TPM 2.0 support	2020/03/12

Disclaimer

All specifications and information in this User's Manual are believed to be accurate and up to date. C&T Solution Inc. does not guarantee that the contents herein are complete, true, accurate or non-misleading. The information in this document is subject to change without notice and does not represent a commitment on the part of C&T Solution Inc.

C&T Solution Inc. disclaims all warranties, express or implied, including, without limitation, those of merchantability, fitness for a particular purpose with respect to contents of this User's Manual. Users must take full responsibility for the application of the product.

Copyright Notice

All rights reserved. No part of this manual may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or information storage and retrieval systems, without the prior written permission of C&T Solutions Inc. Copyright © C&T Solutions Inc.

Trademarks Acknowledgment

Intel®, Celeron® and Pentium® are trademarks of Intel Corporation.

Windows® is registered trademark of Microsoft Corporation.

AMI is trademark of American Megatrend Inc.

IBM, XT, AT, PS/2 and Personal System/2 are trademarks of International Business Machines Corporation

All other products and trademarks mentioned in this manual are trademarks of their respective owners.

Environmental Protection Announcement

Do not dispose this electronic device into the trash while discarding. Please recycle to minimize pollution and ensure environment protection.



Safety Precautions

Before installing and using the equipment, please read the following precautions:

- Put this equipment on a reliable surface during installation. Dropping it or letting it fall could cause damage.
- The power outlet shall be installed near the equipment and shall be easily accessible.
- Turn off the system power and disconnect the power cord from its source before making any installation. Be sure both the system and the external devices are turned OFF. Sudden surge of power could ruin sensitive components. Make sure the equipment is properly grounded.
- When the power is connected, never open the equipment. The equipment should be opened only by qualified service personnel.
- Make sure the voltage of the power source is correct before connecting the equipment to the power outlet.
- Disconnect this equipment from the power before cleaning. Use a damp cloth. Do not use liquid or spray detergents for cleaning.
- Avoid the dusty, humidity and temperature extremes.
- Do not place heavy objects on the equipment.
- If the equipment is not used for long time, disconnect it from the power to avoid being damaged by transient over-voltage.
- The storage temperature shall be above -40°C and below 85°C.
- The computer is provided with a battery-powered real-time clock circuit. There is a danger of explosion if incorrectly replaced. Replace only with the same or equivalent type recommended by the manufacturer.
- If one of the following situation arises, get the equipment checked by service personnel:
 - The power cord or plug is damaged.
 - Liquid has penetrated into the equipment.
 - The equipment has been exposed to moisture.
 - The equipment does not work well or it cannot work according to the user's manual.
 - The equipment has been dropped and damaged.
 - The equipment has obvious signs of breakage.

Technical Support and Assistance

1. Visit the C&T Solution Inc website at www.candtsolution.com where you can find the latest information about the product.
2. Contact your distributor, our technical support team or sales representative for technical support if you need additional assistance. Please have following information ready before you call:
 - Model name and serial number
 - Description of your peripheral attachments
 - Description of your software (operating system, version, application software, etc.)
 - A complete description of the problem
 - The exact wording of any error messages

Conventions Used in this Manual



WARNING

This indication alerts operators to an operation that, if not strictly observed, may result in severe injury.



CAUTION

This indication alerts operators to an operation that, if not strictly observed, may result in safety hazards to personnel or damage to equipment.



NOTE

This indication provides additional information to complete a task easily.

Package Contents

Before installation, please ensure all the items listed in the following table are included in the package.

Item	Description	Q'ty
1	WCO-3200 Series Embedded System	1
2	Utility DVD Driver	1
3	Wall Mount Kit	1
4	Waterproof Connector Cover Set	1

Ordering Information

Model No.	Product Description
WCO-3200-N4200	IP65 Waterproof System with Intel® Pentium® Processor N4200
WCO-3200-IP67-N4200	IP67 Waterproof System with Intel® Pentium® Processor N4200, 4GB RAM, 128GB SSD

Optional Accessories

Model No.	Product Description
1-E09A06007	Adapter AC/DC 12V 5A 60W with 3pin Terminal Block Plug 5.0mm Pitch
1-TXXX00003	Waterproof Power Input Cable 1.5M
1-TVGA00003	Waterproof VGA Cable 1.5M
1-TUSB00016	Waterproof USB 3.0 Cable 1.5M
1-TUSB00015	Waterproof USB 2.0 Cable 1.5M
1-TCOM00011	Waterproof COM Cable 1.5M
1-TLAN00006	Waterproof LAN Cable 1.5M

Chapter 1

Product Introductions

1.1 Overview

Based on Intel® Pentium® N4200, 2.5 GHz, Quad Core processor, WCO-3200 series IP65/IP67 waterproof system are designed for wet conditions applications such as food & beverage processing, outdoor digital signage and surveillance applications. These systems are built with an extremely rugged enclosure, as well as the industrial-grade components, making these units dustproof and waterproof. WCO-3200 series offers modularize flexibal I/O, wide range (9~50V) DC power input, and high reliability even operating in temperature extremes (-40°C ~ +70°C).



Front Panel



Rear Panel

1.1.1 Key Features

- Intel® Pentium® Processor N4200, Quad Core, 2MB Cache, 2.5 GHz
- 1x 204-pin DDR3L SODIMM. Max up to 8GB
- Single display supported by 1x VGA (waterproof connector)
- 2x LAN by M12 X-Code 8-pin
- 1x RS-232/422/485 by M12 D-Code 8-pin, 1x USB 3.0 (waterproof connector), 2x USB 2.0 by M12 D-Code 8-pin, TPM 2.0
- 1x 2.5" SATA HDD bay and 2x mSATA
- 2x Full-size mini PCIe for communication or expansion modules, 2x internal SIM socket
- Full system IP65 level dustproof & waterproof
- Full system IP67 level dustproof & waterproof (WCO-3200-IP67 Only)
- 9 to 50VDC wide range power input
- -40°C to 70°C extended operating temperature

1.2 Hardware Specification

Processor System

- Intel® Pentium® Processor N4200, Quad Core, 2MB Cache, 2.5 GHz

Chipset

- SoC integrated

Memory

- 1x 204-Pin DDR3L-1600 / 1867MHz SODIMM. Max. up to 8GB
- 1x 4GB DDR3L 1600MHz SODIMM (WCO-3200-IP67 Only)

Display

Single Display

- 1x VGA (Waterproof Connector)

Expansion

- 2x Full-size Mini PCIe Socket for Wi-Fi / GSM / Expansion Module

Ethernet

- 2x Intel® i210-AT GbE LAN Port, Support Wake-on-LAN and PXE

Audio

- Codec: Realtek ALC888S

Watchdog Timer

- Software Programmable Supports 1~255 sec. System Reset

TPM

- TPM 2.0

Storage

- 2x Internal 2.5" SATA HDD Bay
- 1x mSATA Socket (shared by 1x Mini-PCIe)
- 1x CFast (shared by 1x mSATA & 1x SATA)

I/O Ports

- 1x USB 3.0 (Waterproof Connector)
- 2x USB 2.0 by M12 D-Code 8-pin
- 1x RS-232/422/485 by M12 D-Code 8-pin
- 2x LAN by M12 X-Code 8-pin
- 2x Antenna Hole
- 1x Power Switch

Power

- Support ATX Mode
- 1x M12 A-code 4-pin Connector with Power Input 9~50VDC
- 1x Optional AC/DC 12V/5A, 60W Power Adapter

Environment

- Operating Temperature: Ambient with Air Flow: -40°C to 70°C (with Industrial Grade Peripherals)
- Storage Temperature: -40°C to 85°C
- Relative humidity: 10%~95% (non-condensing)

Physical

- Dimension: 231 (W) x 292 (D) x 56.5 (H) mm
- Weight:
 - WCO-3200: 4.16 kg
 - WCO-3200-IP67: 4.18 kg
- Construction: Extruded Aluminum with Heavy Duty Metal
- Mounting: Wall Mounting

Operating System

- Windows® 10
- Linux kernel 4.X

Certifications

- IP65
- IP67 (WCO-3200-IP67 Only)
- CE
- FCC Class A

1.3 System I/O

1.3.1 WCO-3200

Front Panel

ATX power on/off switch

Press to power-on or power-off the system

Antenna hole

Used to connect an antenna for optional Mini-PCIe WiFi module

Rear View

DC IN

Used to plug a DC power input with terminal block

VGA

Used to connect a VGA monitor

USB 3.0 port

Used to connect USB 3.0/2.0/1.1 device

USB 2.0 port

Used to connect USB 2.0/1.1 device


COM port

COM support RS232/422/485 serial device


LAN port

Used to connect the system to a local area network

Front Panel

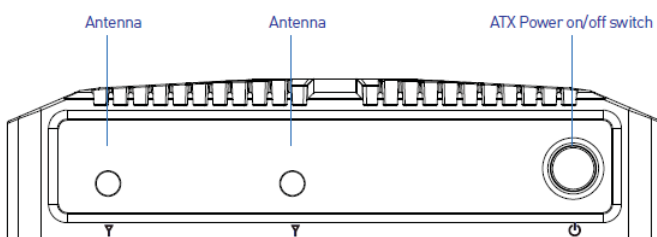

Rear Panel

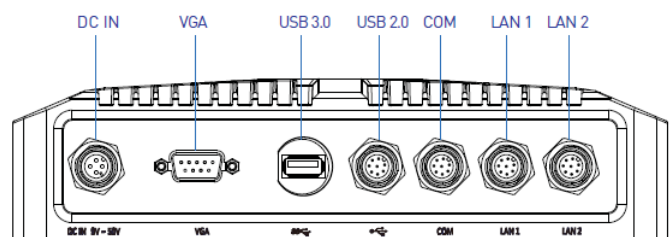

1.3 System I/O

1.3.2 WCO-3200-IP67

Front Panel

ATX power on/off switch

Press to power-on or power-off the system

Antenna hole

Used to connect an antenna for optional Mini-PCIe WiFi module

Rear View

DC IN

Used to plug a DC power input with terminal block

VGA

Used to connect a VGA monitor

USB 3.0 port

Used to connect USB 3.0/2.0/1.1 device

USB 2.0 port

Used to connect USB 2.0/1.1 device


COM port

COM support RS232/422/485 serial device


LAN port

Used to connect the system to a local area network

Front Panel

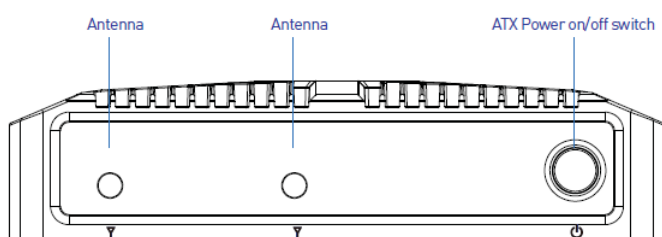


Rear Panel

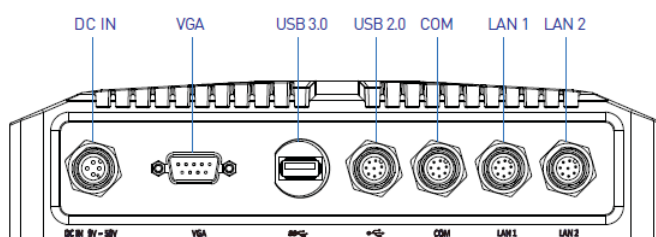


1.4 Mechanical Dimensions

1.4.1 WCO-3200

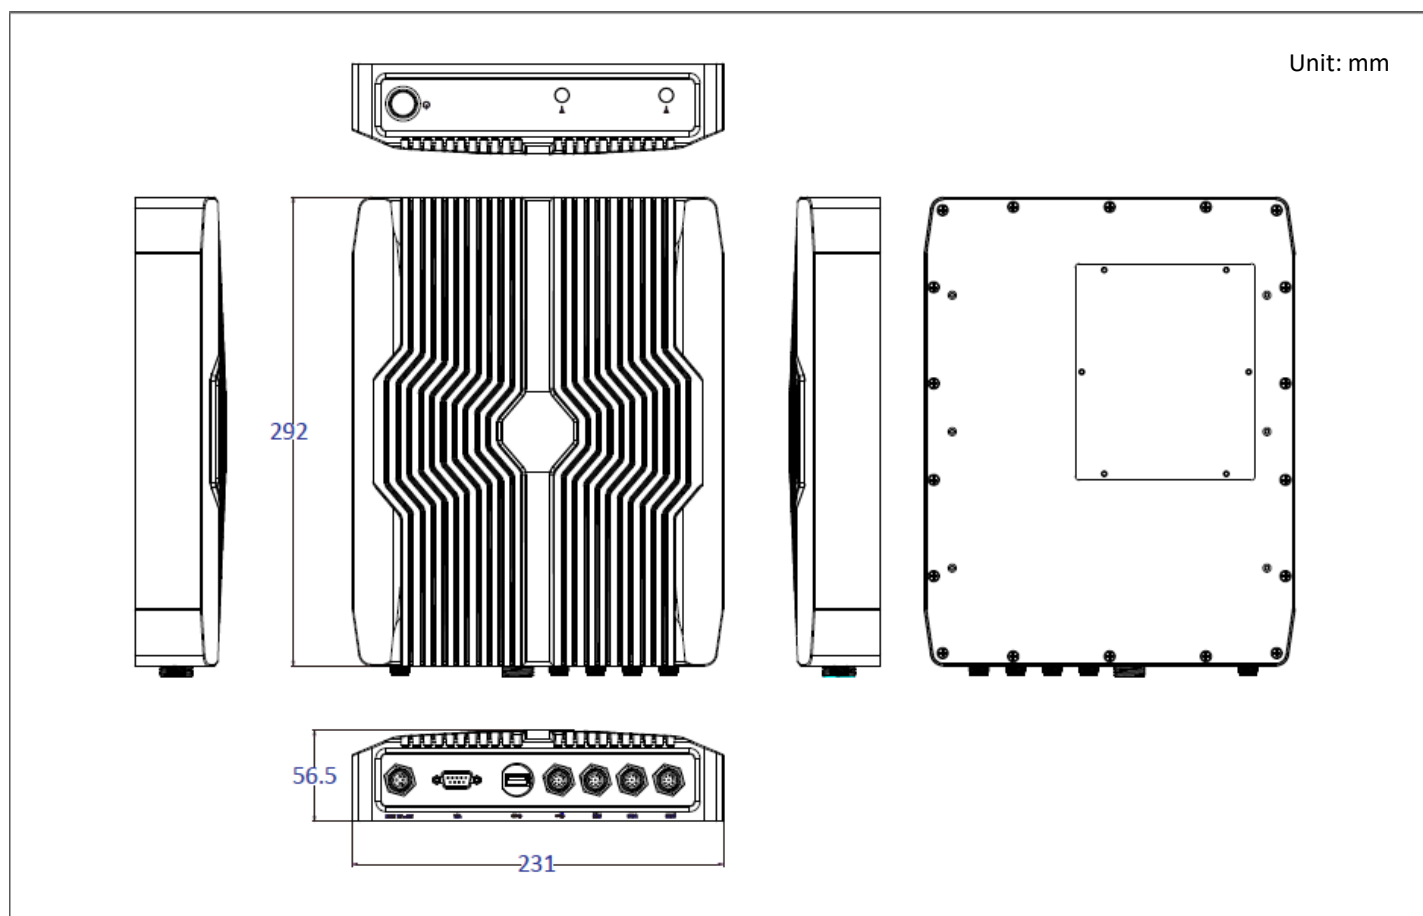

1.4.2 WCO-3200-IP67

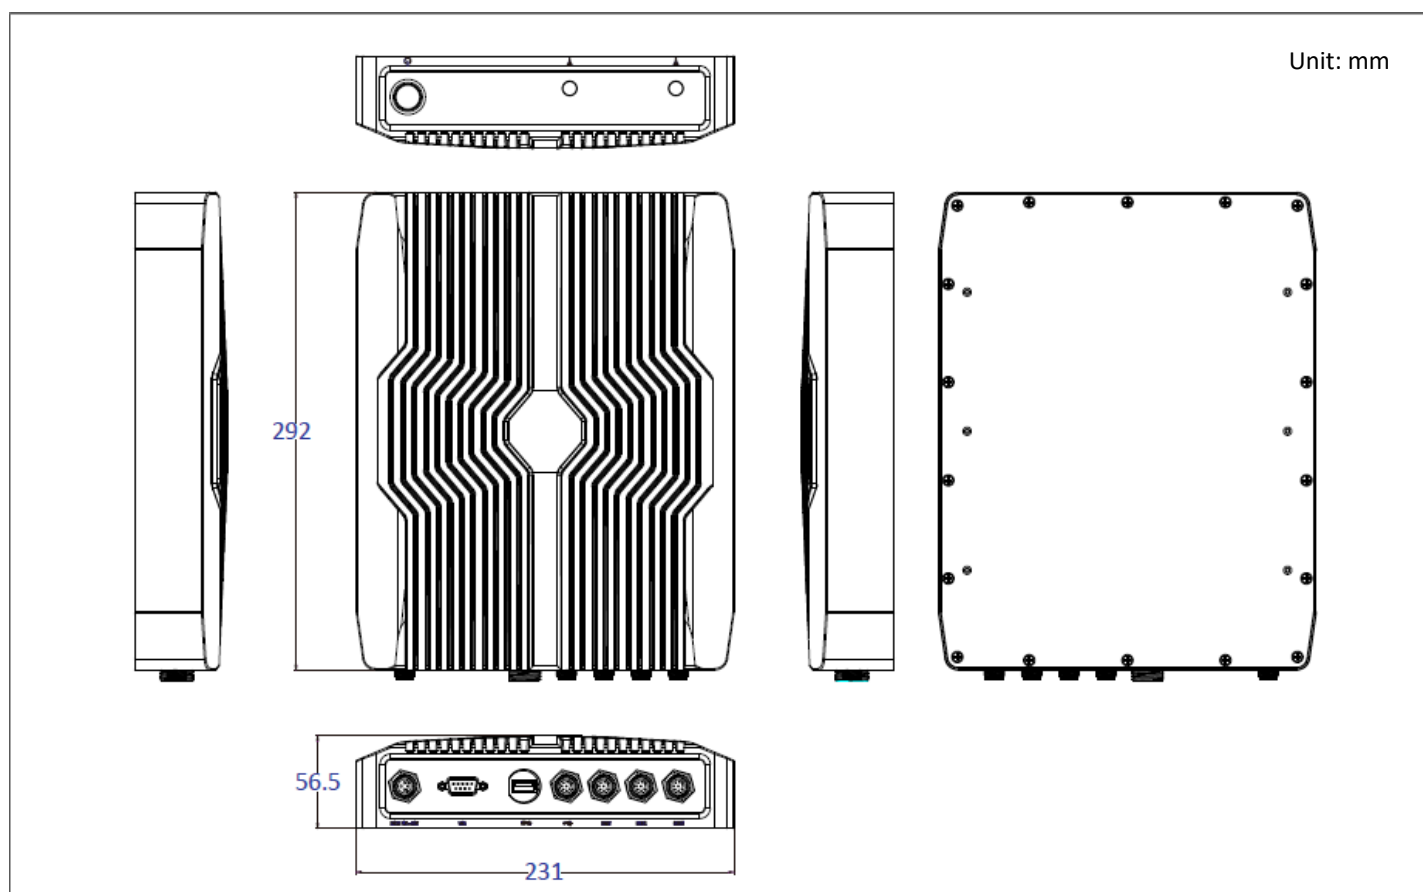


Chapter 2


Connectors

2.1 Switch and Connector Locations

2.1.1 Top View

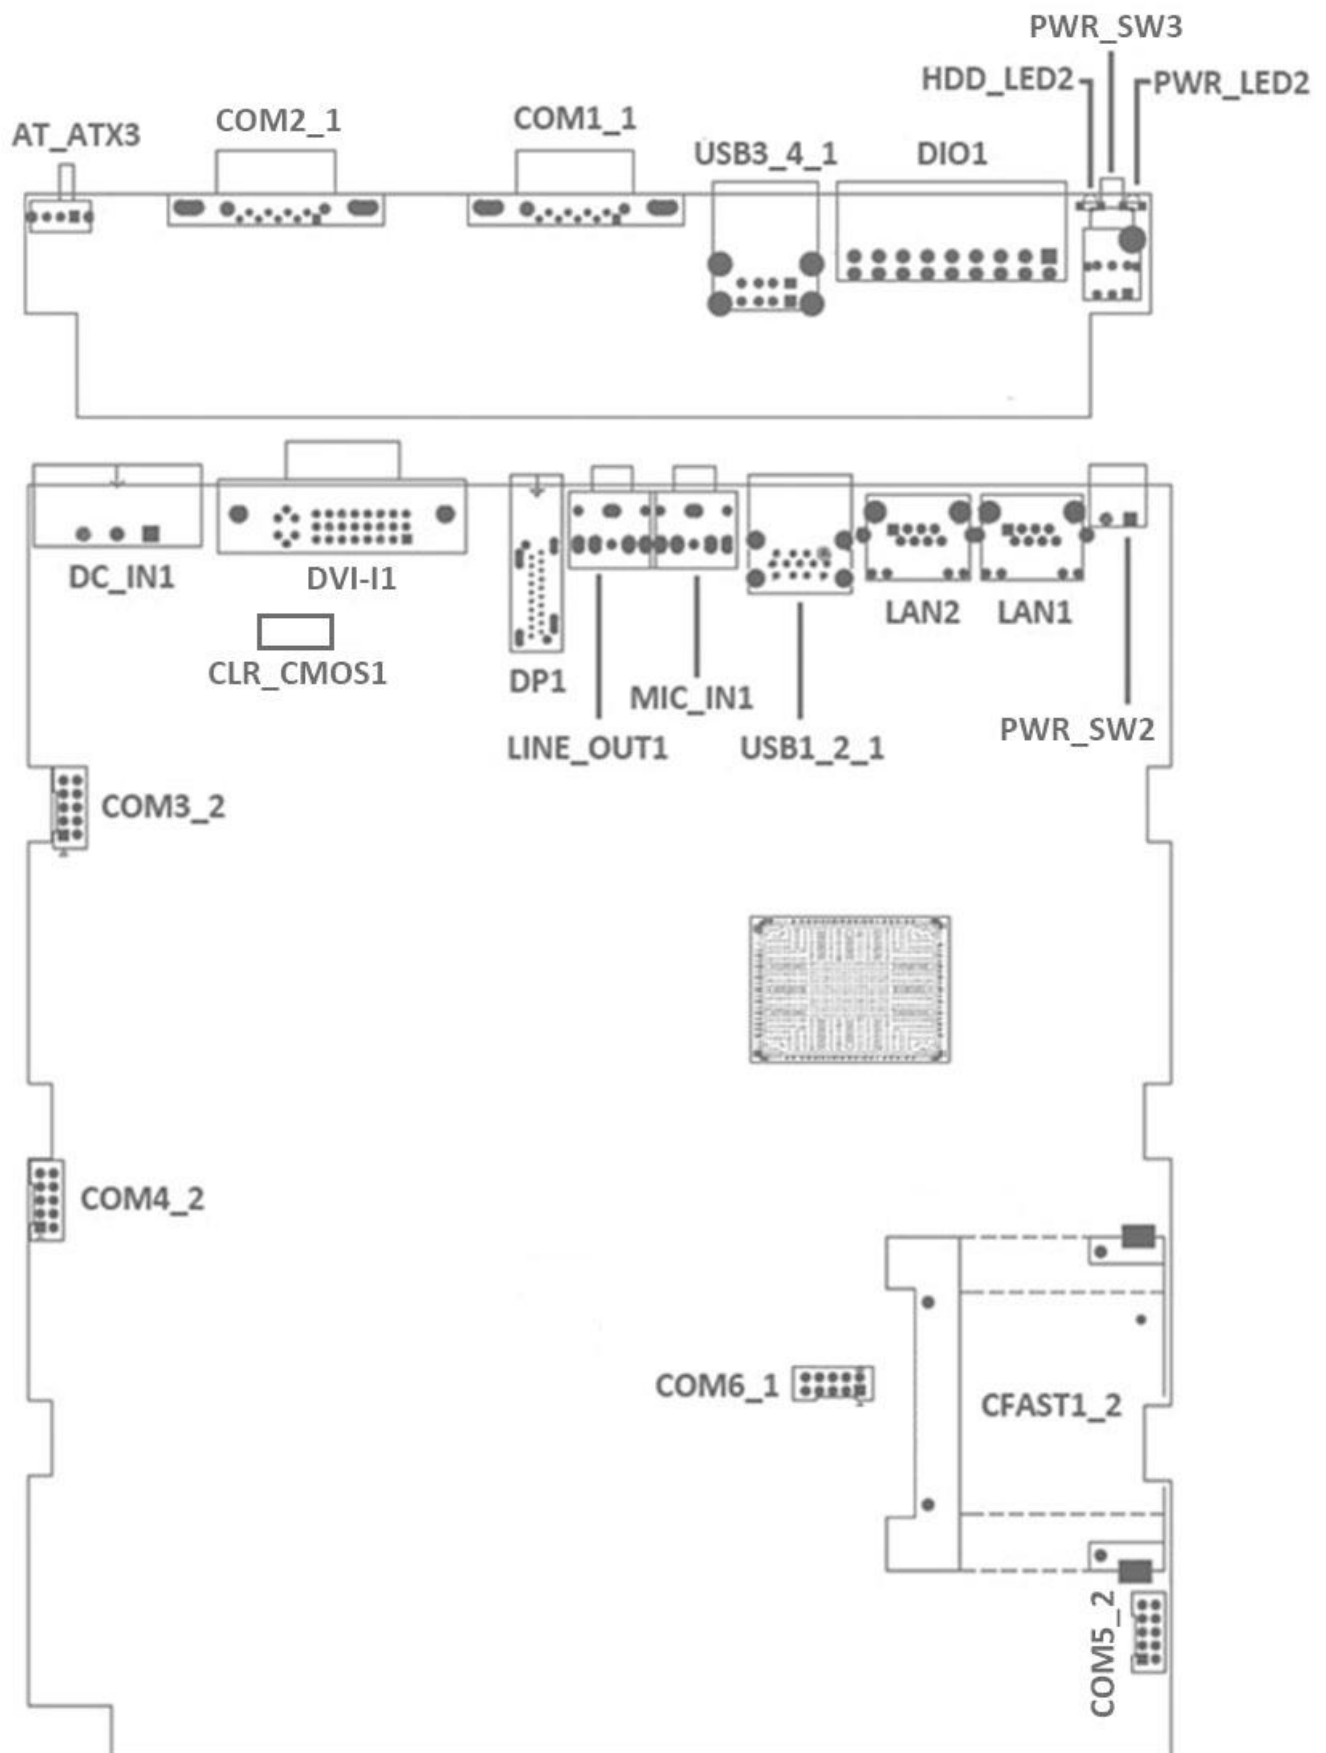

2.1.2 Bottom View

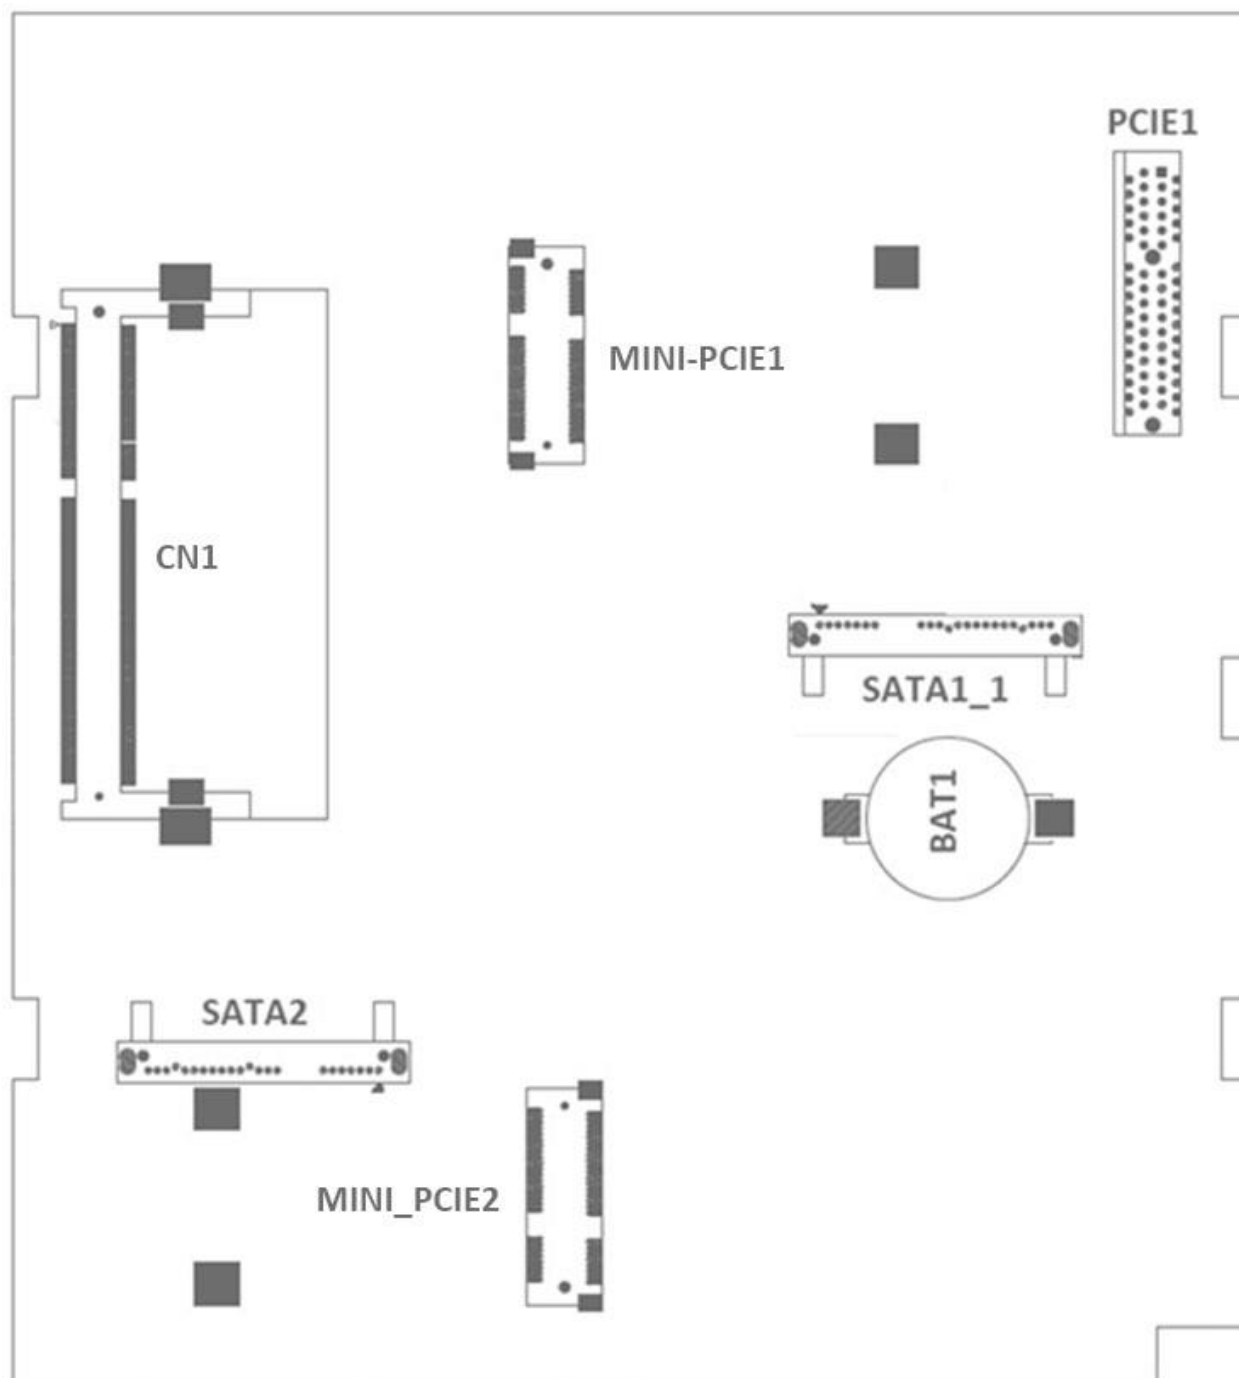

2.2 Connector Definition


List of Connector

Connector Location	Definition
COM	RS232 / RS422 / RS485 Connector
LAN1, LAN2	LAN Port
USB2.0	USB 2.0 Port
USB3.0	USB 3.0 Port
VGA	Standard VGA Port
DC_IN	DC Power Input Connector (+0 ~ 50V)

COM: RS232 / RS422 / RS485 Connector

Connector Type: M12 D-code 8-pin


Pin	RS232 Definition	RS422 / 485 Full Duplex Definition	RS485 Half Duplex Definition
1	DCD	TX-	DATA-
2	RXD	TX+	DATA+
3	TXD	RX+	
4	DTR	RX-	
5	GND	GND	GND
6	DSR		
7	RTS		
8	CTS		



LAN: LAN 1 & LAN 2 Connector

Connector Type: M12 X-code 8-pin

Pin	Definition	Pin	Definition
1	LAN1_MDI0P	5	LAN1_MDI3P
2	LAN1_MDI0N	6	LAN1_MDI3N
3	LAN1_MDI1P	7	LAN1_MDI2N
4	LAN1_MDI1N	8	LAN1_MDI2P

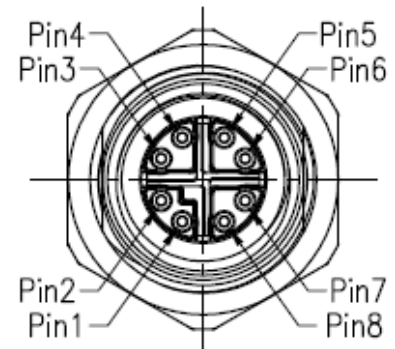


Pin	Definition	Pin	Definition
1	LAN2_MDI0P	5	LAN2_MDI3P
2	LAN2_MDI0N	6	LAN2_MDI3N
3	LAN2_MDI1P	7	LAN2_MDI2N
4	LAN2_MDI1N	8	LAN2_MDI2P

USB 2.0: 2 Ports USB 2.0

Connector Type: M12 D-code 8-pin


Pin	Definition
1	+5V
2	USB_D1-
3	USB_D1+
4	GND
5	+5V
6	USB_D2-
7	USB_D2+
8	GND



USB 3.0: Standard USB 3.0 Connector


Connector Type: Waterproof Connector

Pin	Definition	Pin	Definition
1	+5V	6	USB3.0_RX+
2	USB2.0_D-	7	GND
3	USB2.0_D+	8	USB3.0_TX-
4	GND	9	USB3.0_TX+
5	USB3.0_RX-		

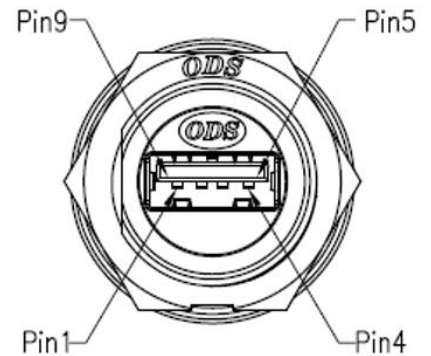**VGA: Standard VGA Connector**


Connector Type: Waterproof Connector

Pin	Definition	Pin	Definition
1	RED	9	+5V
2	GREEN	10	S_GND
3	BLUE	11	NC
4	NC	12	SDA
5	GND	13	HSYNC
6	R_GND	14	VSYNC
7	G_GND	15	SCL
8	B_GND		

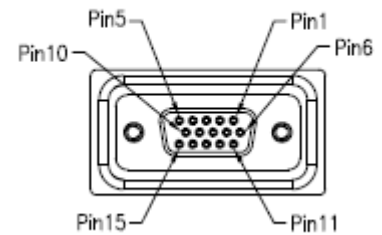**DC IN: DC Power Input Connector (+9 ~ 50V)**

Connector Type: Waterproof Connector

Pin	Definition
1	+9~50VIN
2	NC
3	GND
4	NC



Chapter 3

System Setup

3.1 Set torque force to 3.5 kgf-cm to execute all the screwing and unscrewing

**WARNING**

In order to prevent electric shock or system damage, before removing the chassis cover, must turn off power and disconnect the unit from power source.

3.2 Installing SODIMM


1. Turn the system upside down, removing chassis bottom cover, unscrew the eight screws on the bottom cover.




2. Unscrew the below four screws to remove the internal SATA HDD bracket.




3. After removing internal SATA HDD bracket, you will be able to access the memory slot.

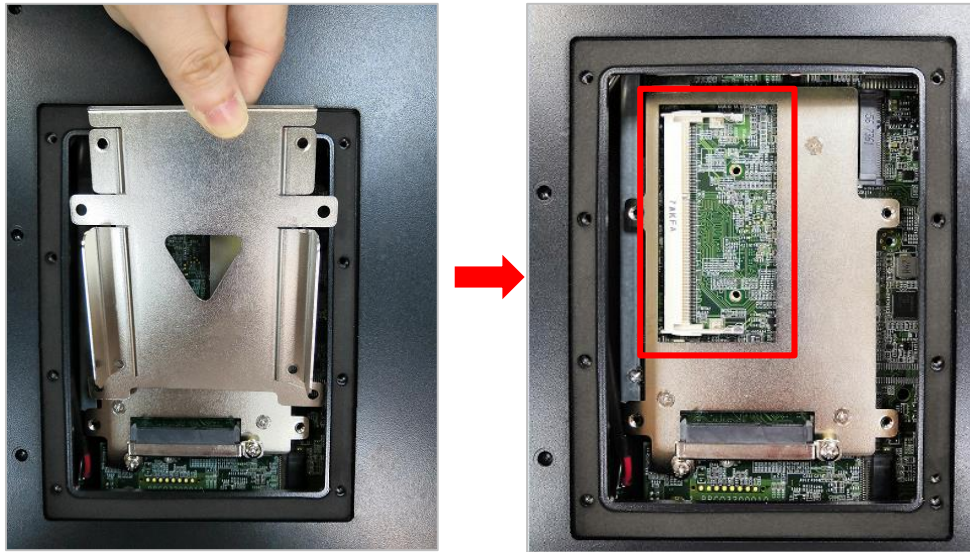

4. Insert memory module from 45 degree direction.

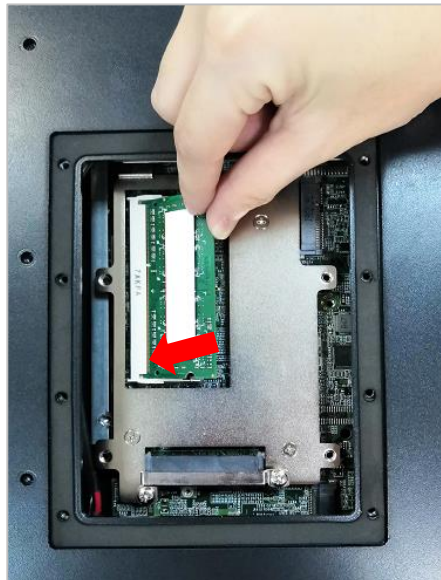

5. Press the memory module vertically downward until you hear the “click” sound. Make sure the memory module is firmly in place.

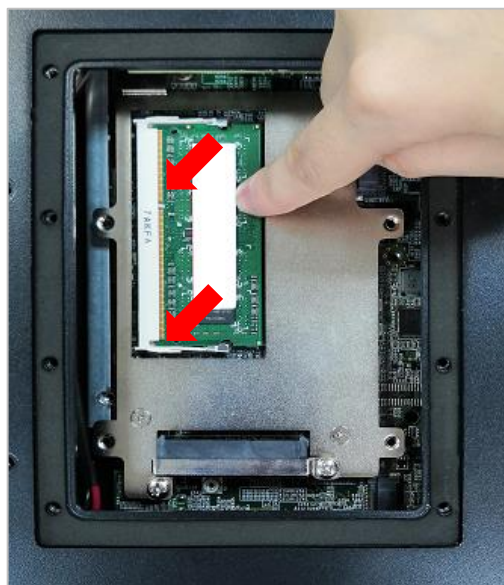


3.3 Installing HDD on internal SATA HDD bay

1. Unscrew the below four screws (M3x5L) to remove the internal SATA HDD bay.



2. Lock the 2.5" HDD with HDD bracket using four screws (M3x4L).

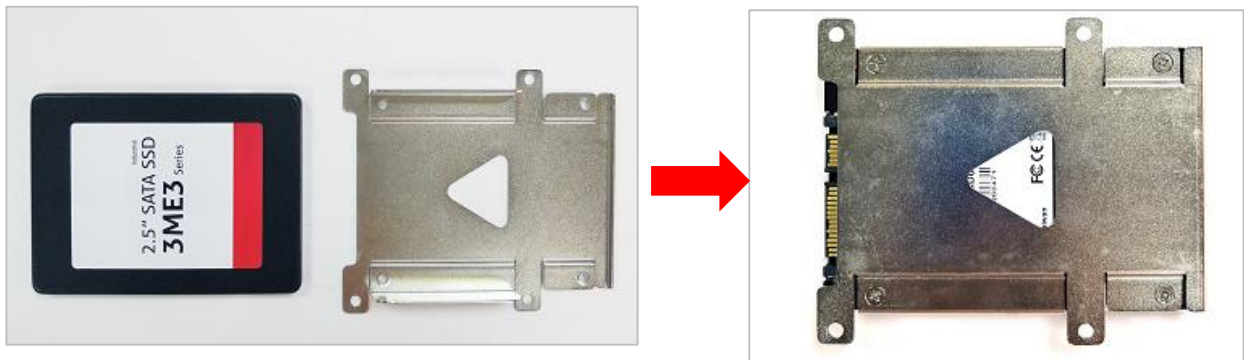

3. Install the HDD bracket following the direction below.




4. Fasten the four screws to lock the internal SATA HDD bracket.



3.4 Removing chassis bottom cover

1. Removing chassis bottom cover may affect waterproof function and is only necessary when you need to install mini PCIe card and antenna.
2. Turn the system upside down. Unscrew the eighteen screws on the bottom cover.

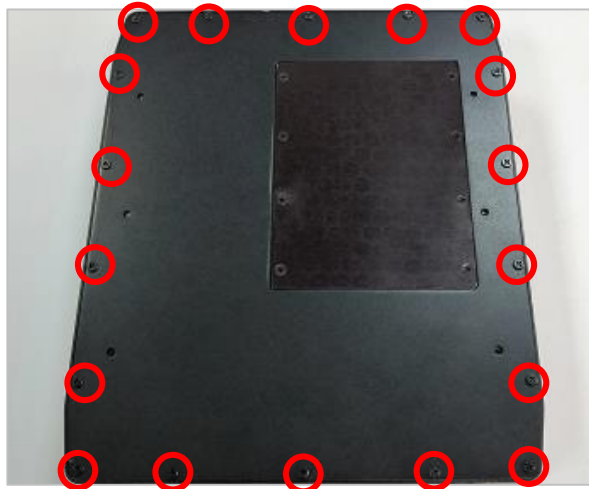


3. Now you can remove the bottom cover.




3.5 Installing mini PCIe card / mSATA


1. Two mini PCIe slots are available for WCO-3200 series. MiniPCIE1 supports mSATA.

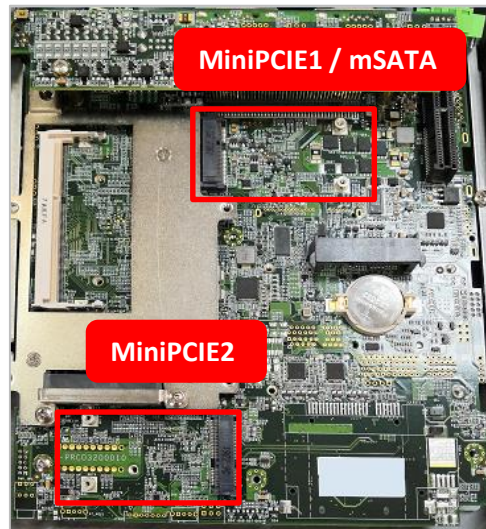

2. Insert mini PCIe card or mSATA module from 45 degree direction.

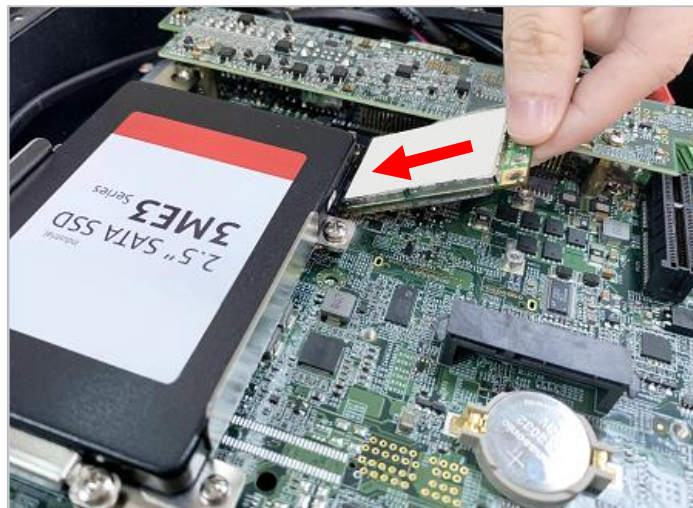


3. Press the mini PCIe card or mSATA module down and lock it with two screws (M2x3.7L).

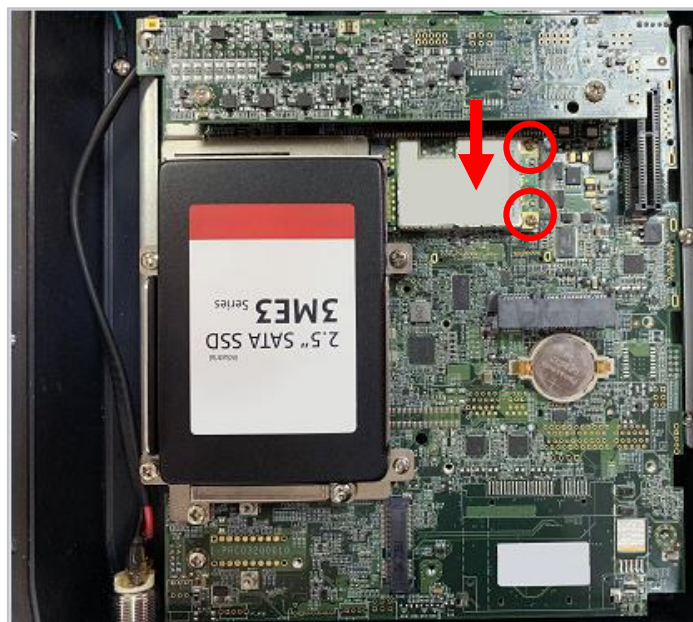


3.6 Installing antenna

1. Two antenna holes are available for WCO-3200 series.

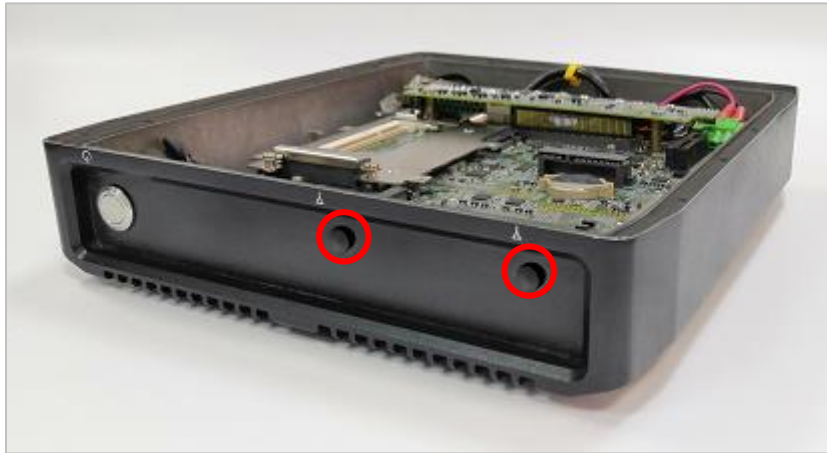

2. Remove antenna hole cover on the system panel.

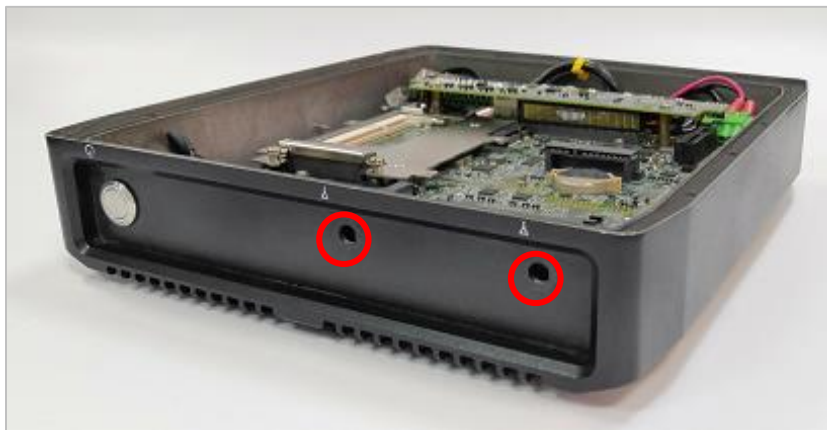

3. Have antenna jack penetrate through the hole.




4. Put on washer and fasten the nut with antenna jack.



5. Attach the RF connector at the cable-end onto the communication module.




6. Assemble the antenna and antenna jack together.

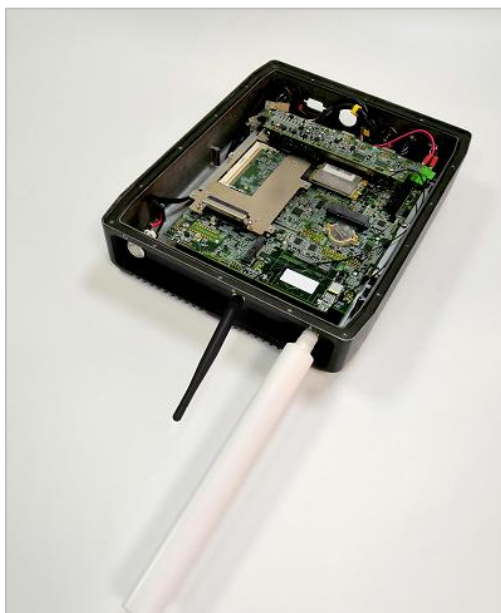


3.7 Assemble chassis bottom cover

1. Place the bottom cover according to the below direction and make sure the rail is facing inside the system.

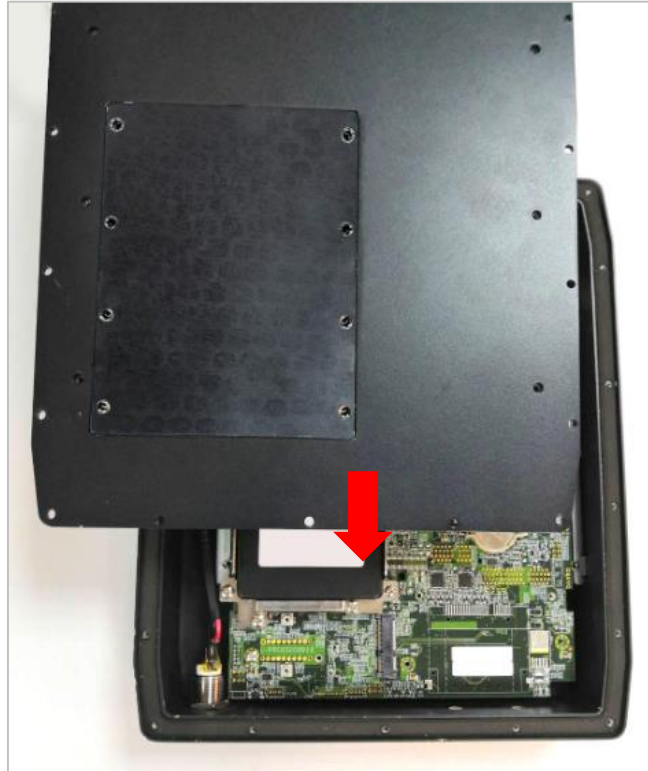

2. Lock the bottom cover with the eighteen screws.

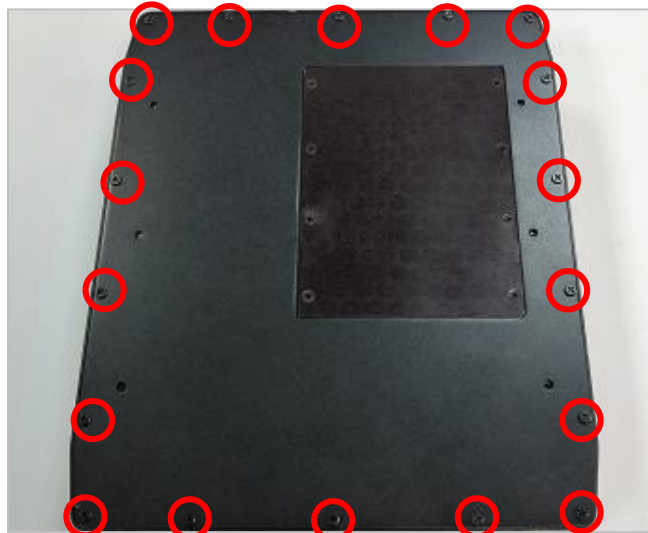

3.8 Assemble waterproof cable

1. Please remove the external waterproof cover on the connectors that you need to connect to mating waterproof cables.



2. Install external M12 A-CODE 4P power cable. Please align the foolproof opening and tighten the locking ring to secure waterproof cable.



3. Install external waterproof VGA cable. Please align the connector direction and tighten the locking ring to secure waterproof cable.



4. Install external waterproof USB 3.0 cable. Please align the foolproof opening and tighten the locking ring to secure waterproof cable.



5. Install external M12 A-CODE 8P USB 2.0 cable. Please align the foolproof opening and tighten the locking ring to secure waterproof cable.



6. Install external M12 A-CODE 8P COM cable. Please align the foolproof opening and tighten the locking ring to secure waterproof cable.



7. Install external M12 X-CODE 8P LAN1 cable. Please align the foolproof opening and tighten the locking ring to secure waterproof cable.



8. Install external M12 X-CODE 8P LAN2 cable. Please align the foolproof opening and tighten the locking ring to secure waterproof cable.



Chapter 4

BIOS Setup

4.1 BIOS Introduction

The system BIOS software is stored on EEPROM. The BIOS provides an interface to modify the configuration. When the battery is removed, all the parameters will be reset.

BIOS Setup

Power on the embedded system and by pressing or <F2> immediately allows you to enter the setup screens. If the message disappears before you respond and you still wish to enter the Setup, restart the system by turning it OFF and ON or pressing the RESET button.

You may also restart the system by simultaneously pressing <Ctrl>, <Alt>, and <Delete> keys.

Control Keys	
<→> <←>	Select Screen
<↑> <↓>	Select Item
<Enter>	Select
<Page Up/+>	Increases the numeric value or makes changes
<Page Down/->	Decreases the numeric value or makes changes
<F1>	General Help
<F2>	Previous Value
<F3>	Load Optimized Defaults
<F4>	Save Configuration and Exit
<Tab>	Select Setup Fields
<Esc>	Exit BIOS Setup

Main Setup

The main menu lists the setup functions you can make changes to. You can use the arrow keys (↑↓) to select the item. The on-line description of the highlighted setup function is displayed at the bottom of the screen.

General Help <F1>

The BIOS setup program provides a General Help screen. You can call up this screen from any menu by simply pressing <F1>. The Help screen lists the appropriate keys to use and the possible selections for the highlighted item. Press <Esc> to exit the Help screen.

4.2 Main Setup

Press to enter BIOS CMOS Setup Utility. The Main setup screen is showed as following when the setup utility is entered. System Date/Time is set up in the Main Menu.




4.2.1 System Date

Set the system date. Please use <Tab> to switch between data elements.

4.2.2 System Time

Set the system time. Please use <Tab> to switch between time elements.

4.3 Advanced Setup

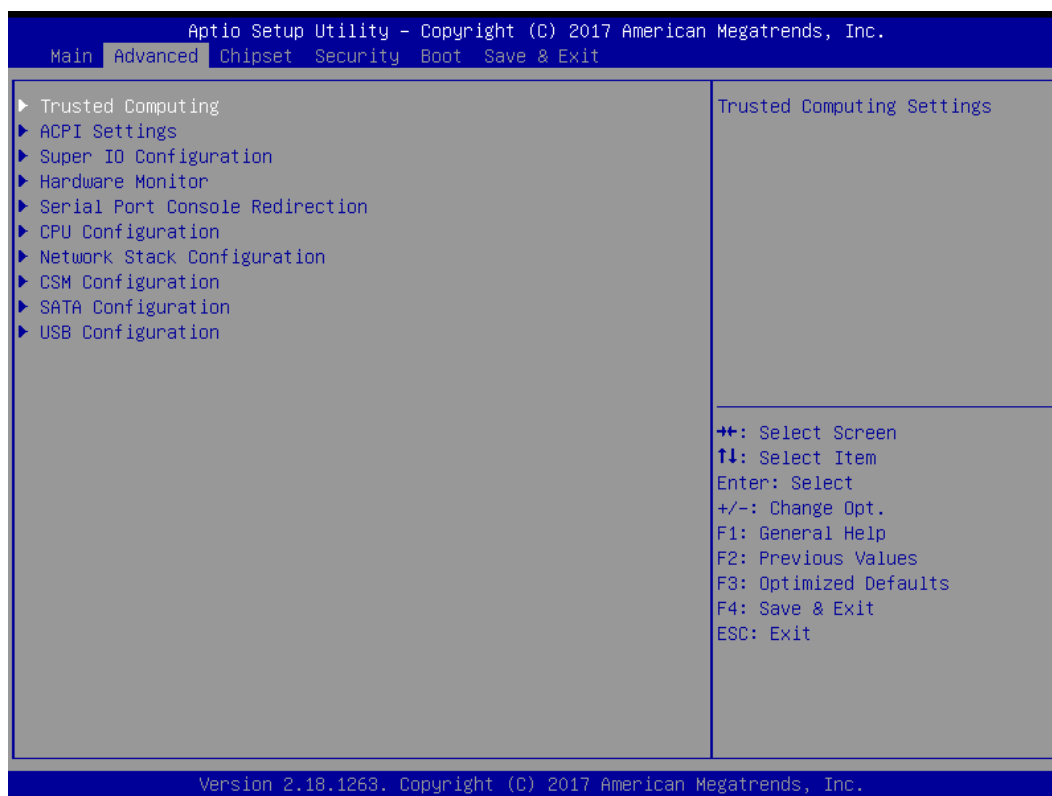


4.3.1 Trusted Computing (Optional)



- **Security Device Support**
Enable or disable TPM function

4.3.2 ACPI Settings

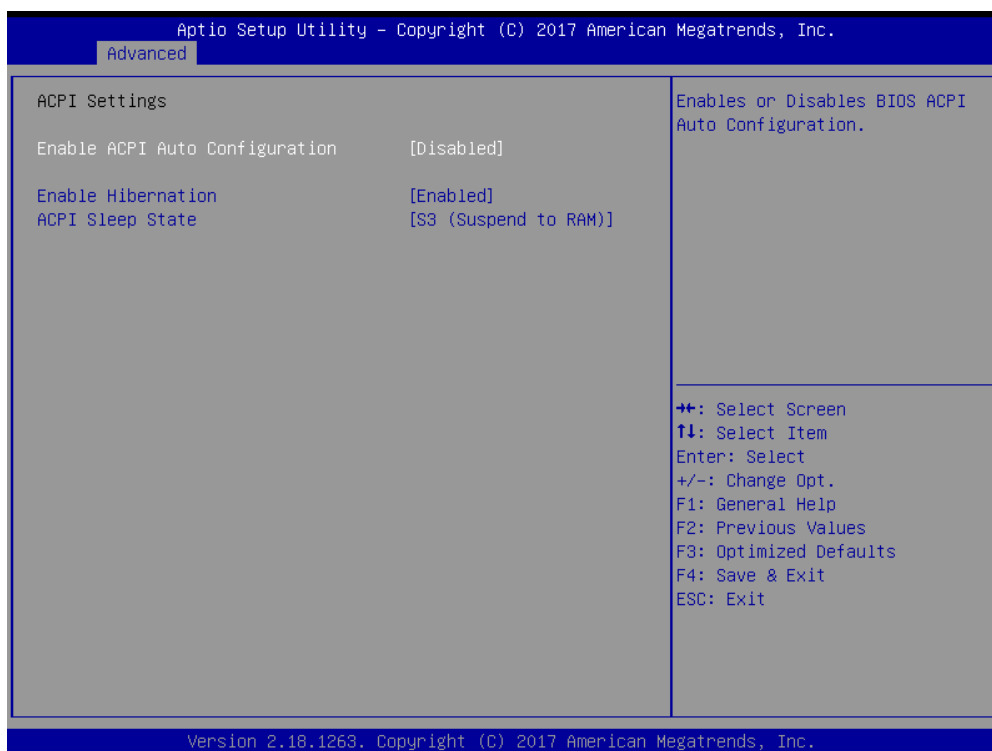

■ Enable ACPI Auto Configuration

This item allows you to enable or disable BIOS ACPI Auto Configuration.

■ Enable Hibernation


This item allows you to enable or disable system ability to hibernate.

■ ACPI Sleep State


This item selects the highest ACPI sleep state the system will enter when the suspend button is pressed. Select <Suspend Disabled> or <S3 (Suspend to RAM)>.

4.3.3 Super IO Configuration

This setting allows you to select options for the Super IO Configuration, and change the value of the selected option.

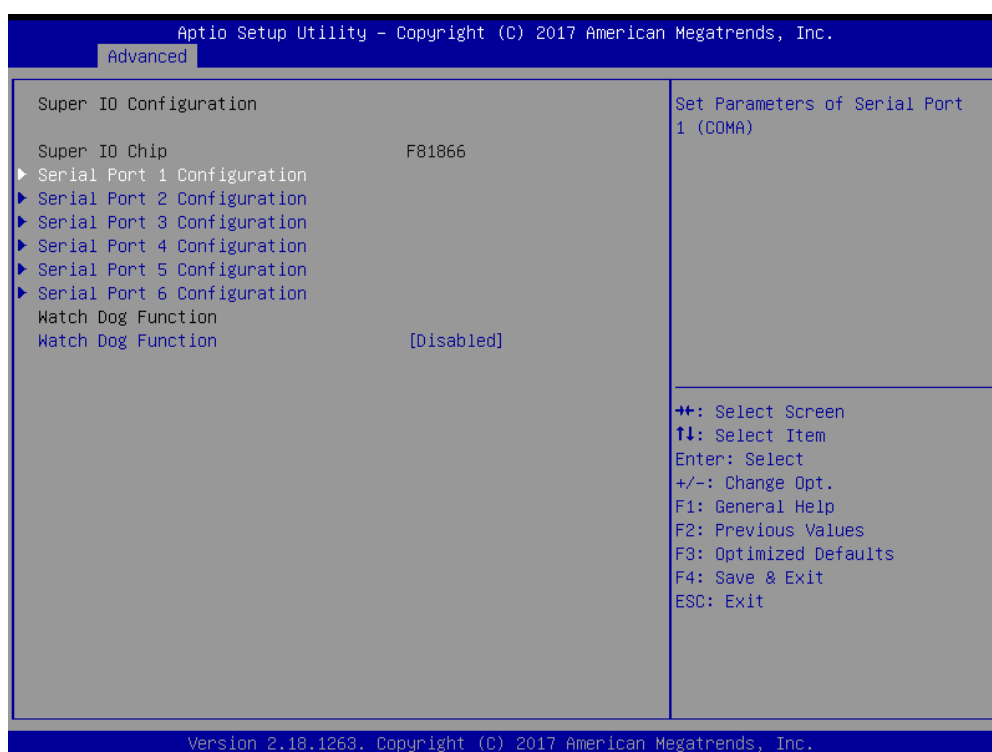

Serial Port 1 Configuration

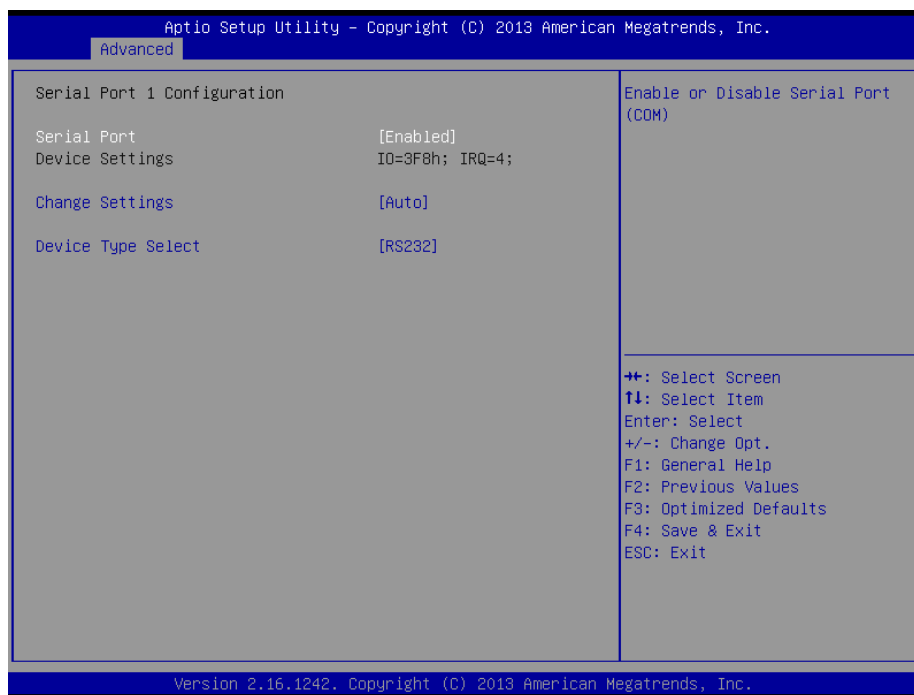

- **Serial Port**

This item allows you to enable or disable serial port.


- **Change Settings**

This item allows you to change the address & IRQ settings of the specified serial port.

- **Device Type Select**

Change the Serial interface. Select <RS232> ,<RS422 Full Duplex> or <RS485 Half Duplex> interface.

Serial Port 2 Configuration

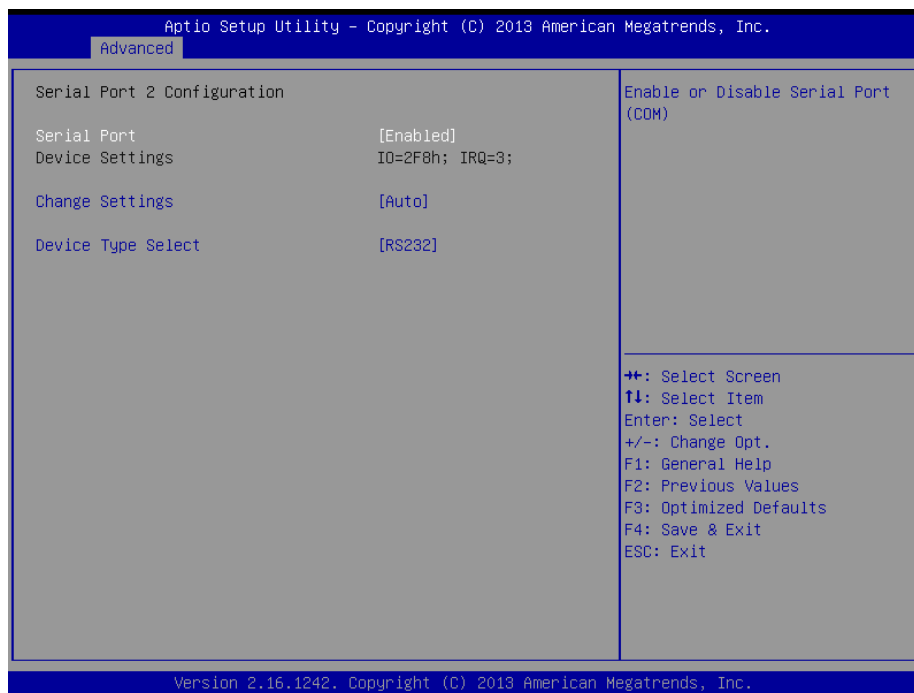

- **Serial Port**

This item allows you to enable or disable serial port.


- **Change Settings**

This item allows you to change the address & IRQ settings of the specified serial port.

- **Device Type Select**

Change the Serial interface. Select <RS232> ,<RS422 Full Duplex> or <RS485 Half Duplex> interface.

Serial Port 3 Configuration

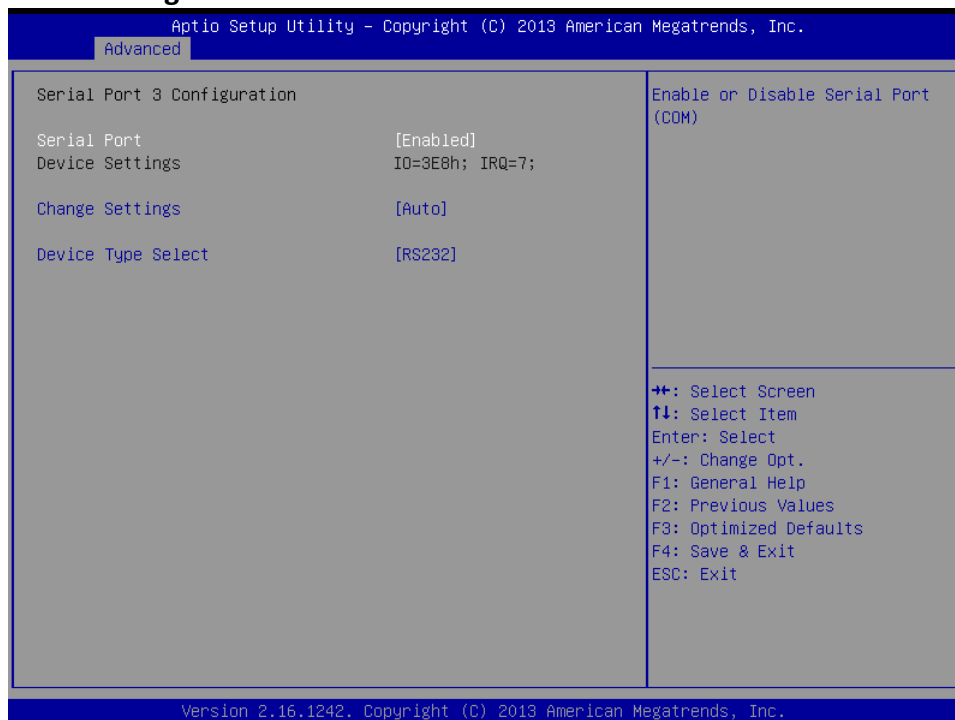


- **Serial Port**
This item allows you to enable or disable serial port.
- **Change Settings**
This item allows you to change the address & IRQ settings of the specified serial port.
- **Device Type Select**
Change the Serial interface. Select <RS232> ,<RS422 Full Duplex> or <RS485 Half Duplex> interface.

Serial Port 4 Configuration



- **Serial Port**
This item allows you to enable or disable serial port.
- **Change Settings**
This item allows you to change the address & IRQ settings of the specified serial port.
- **Device Type Select**
Change the Serial interface. Select <RS232> ,<RS422 Full Duplex> or <RS485 Half Duplex> interface.

Serial Port 5 Configuration

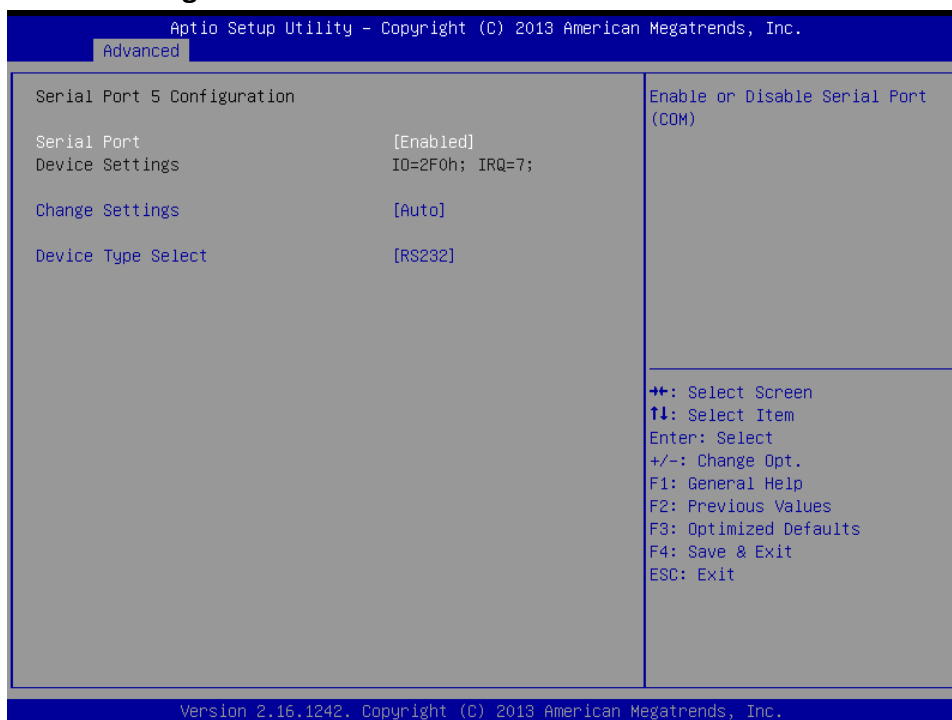

- **Serial Port**
This item allows you to enable or disable serial port.
- **Change Settings**
This item allows you to change the address & IRQ settings of the specified serial port.
- **Device Type Select**
Change the Serial interface. Select <RS232> ,<RS422 Full Duplex> or <RS485 Half Duplex> interface.

Serial Port 6 Configuration



- **Serial Port**
This item allows you to enable or disable serial port.
- **Change Settings**
This item allows you to change the address & IRQ settings of the specified serial port.
- **Device Type Select**
Change the Serial interface. Select <RS232> ,<RS422 Full Duplex> or <RS485 Half Duplex> interface.

■ Watch Dog Function

This setting allows you to setup the system watch-dog timer, a hardware timer that generates a reset when the software that it monitors does not respond as expected each time the watch dog polls it.

● Watch Dog Timer Count Mode


Change the Watch dog mode. Select <Second Mode> or <Minute Mode> mode.

● Watch Dog Timer Time Out Value


User can set a value in the range of 20 to 255.

4.3.4 Hardware Monitor

These items display the current status of all monitored hardware devices/ components such as voltages and temperatures.

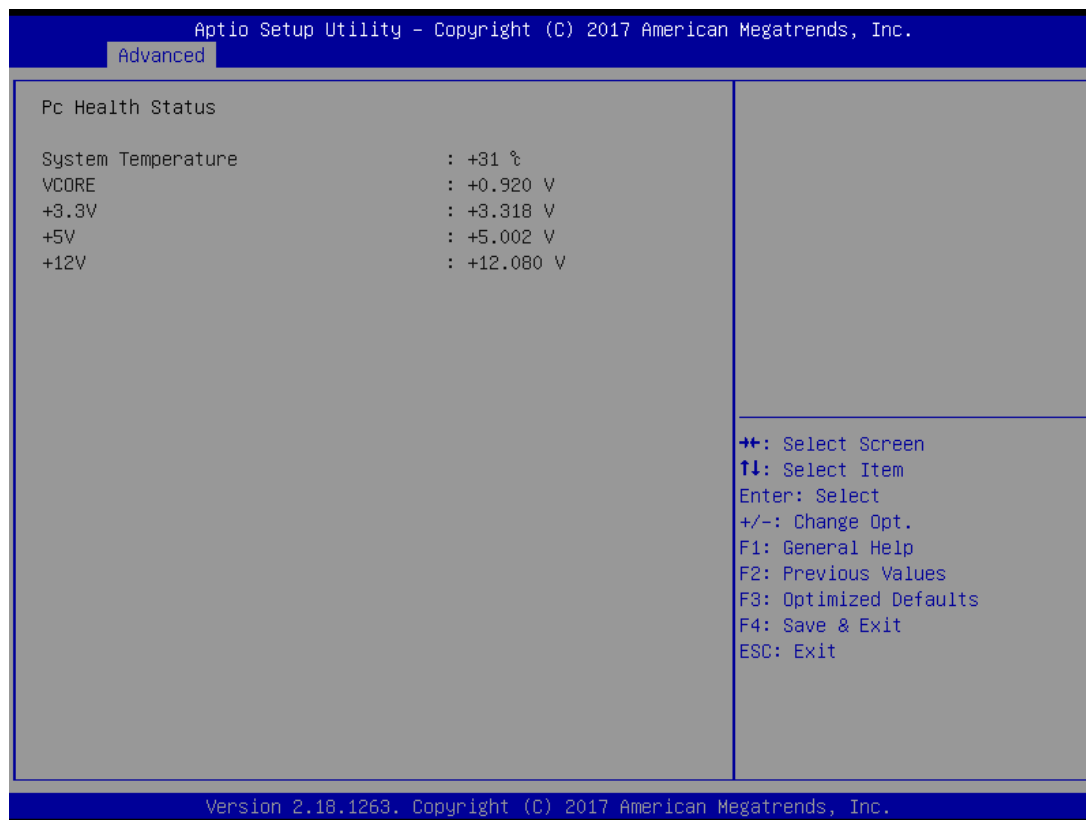


4.3.5 Serial Port Console Redirection

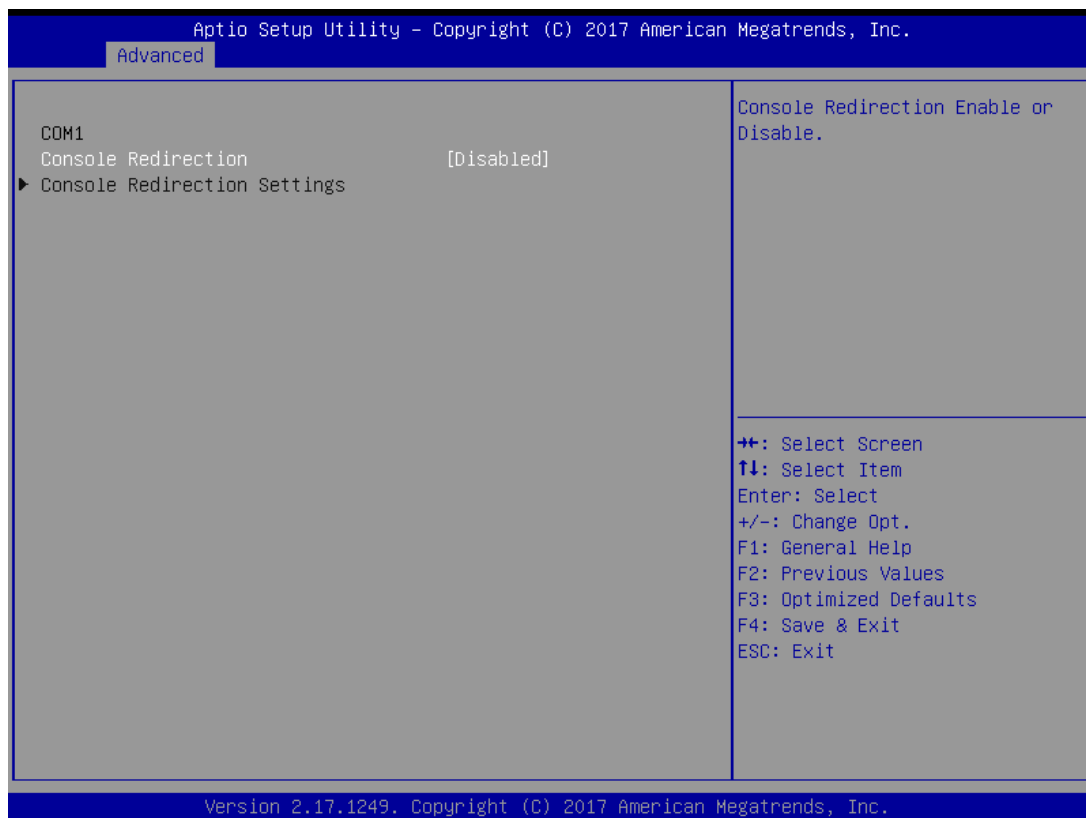

■ Console Redirection

These items allows you to enable or disable COM1 console redirection.


4.3.6 CPU Configuration

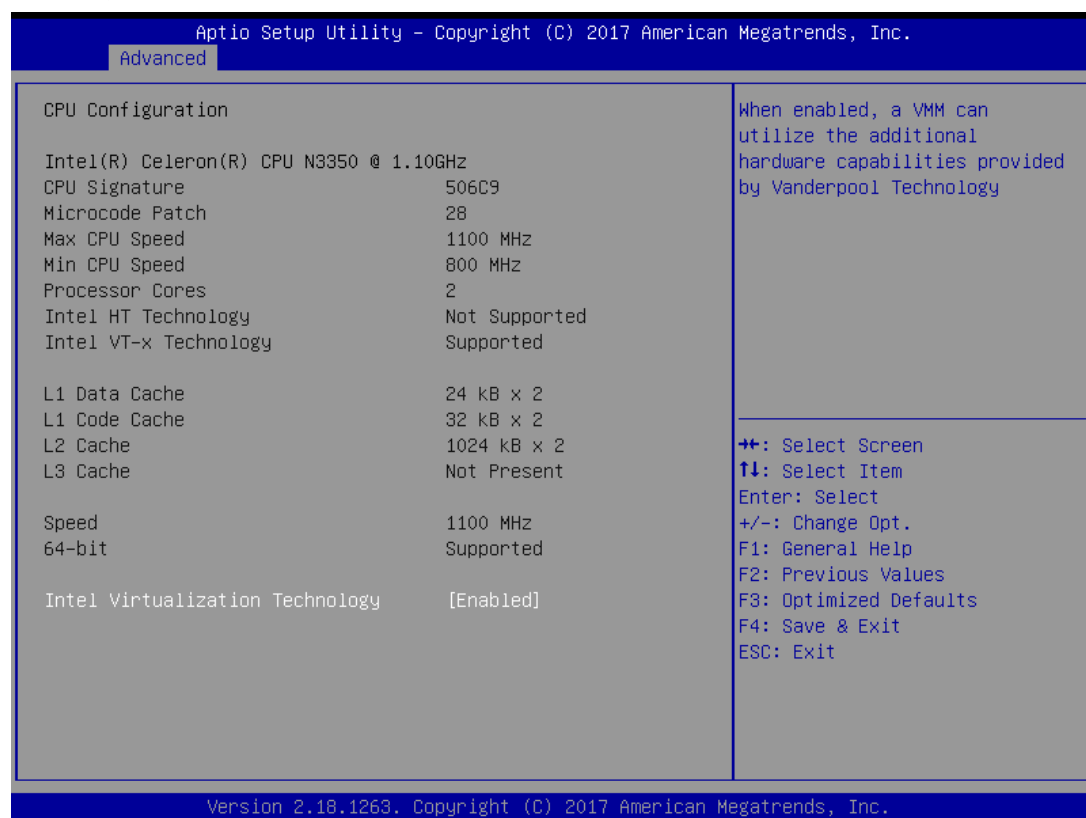

■ Intel Virtualization Technology

Virtualization enhanced by Intel Virtualization Technology will allow a platform to run multiple operating systems and applications in independent partitions. With virtualization, one computer system can function as multiple Virtual systems.

4.3.7 Network Stack Configuration

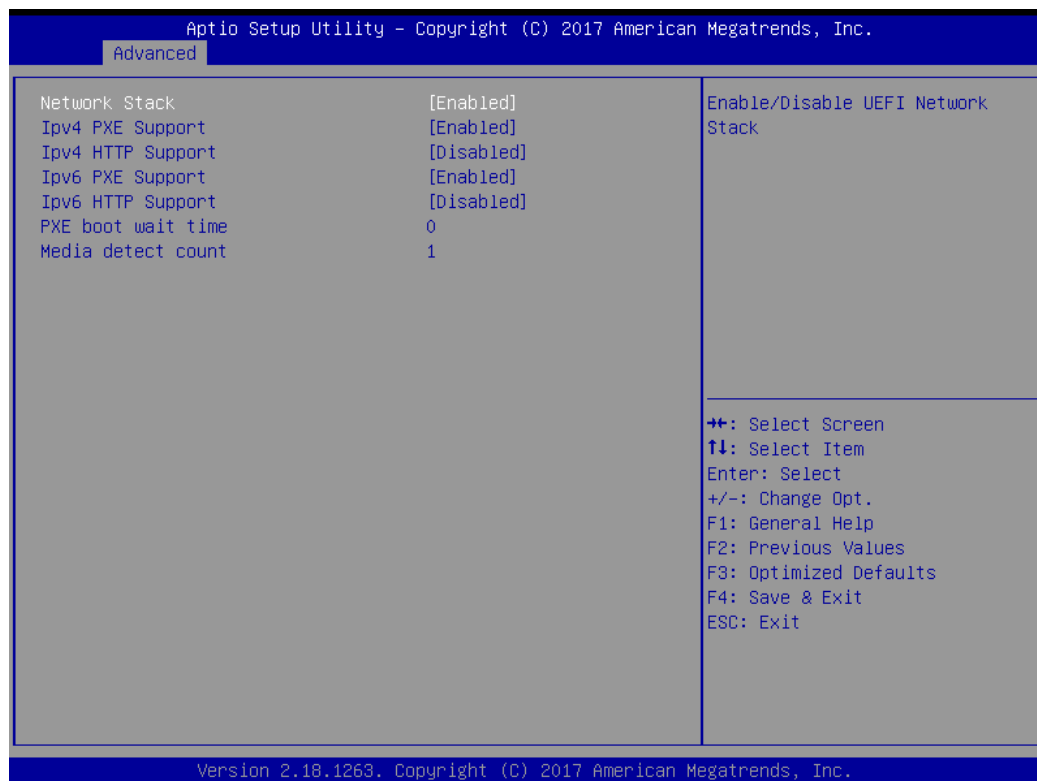

■ Network Stack

This item allows you to enable or disable UEFI network stack.

● IPv4 PXE Support

This item allows you to enable or disable IPv4 PXE Support. This item is configurable only when Network Stack is enabled.

● IPv4 HTTP Support

This item allows you to enable or disable HTTP boot support for IPv4. This item is configurable only when Network Stack is enabled.

● Ipv6 PXE Support

This item allows you to enable or disable IPv6 PXE Support. This item is configurable only when Network Stack is enabled.

● IPv6 HTTP Support

This item allows you to enable or disable HTTP boot support for IPv4. This item is configurable only when Network Stack is enabled.


● PXE boot wait time

This item allows you to configure how long to wait before you can press to abort the PXE boot. This item is configurable only when Network Stack is enabled.

● Media detect count

This item allows you to set the number of times to check the presence of media. This item is configurable only when Network Stack is enabled.

4.3.8 CSM Configuration

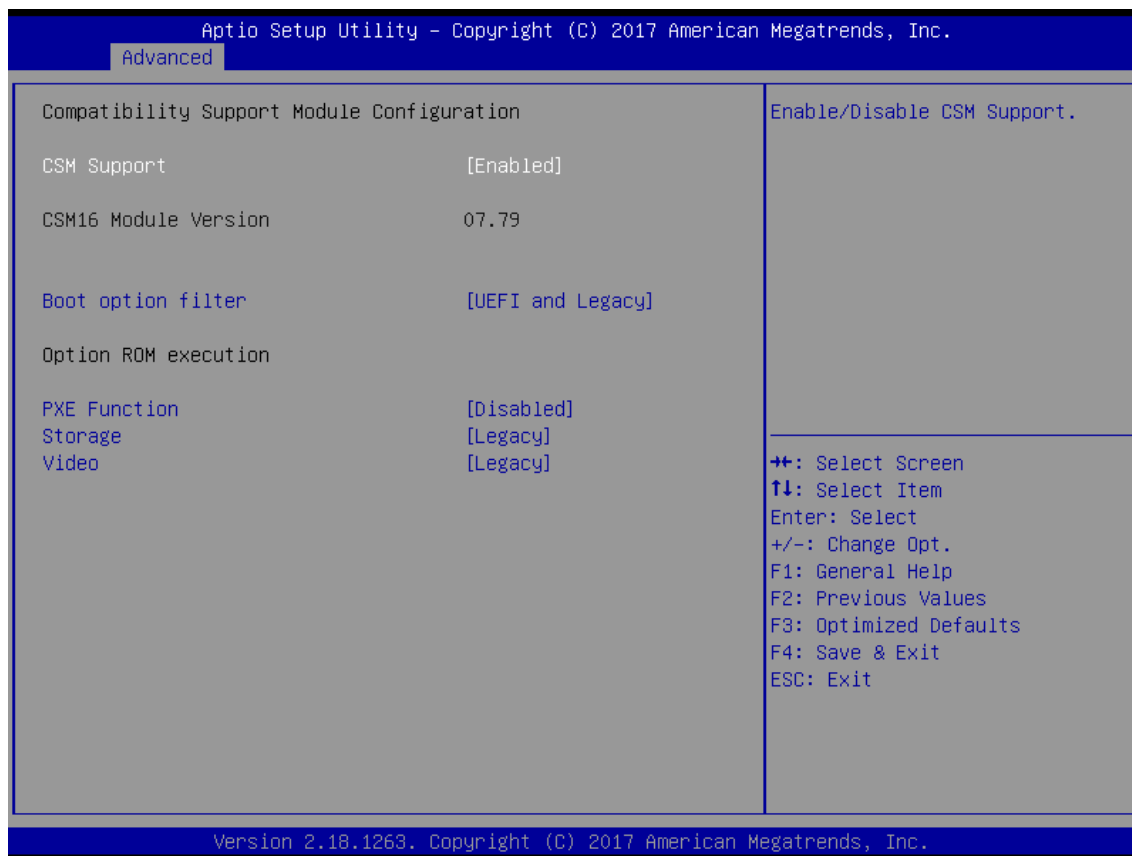

■ CSM Support

Enables or disables UEFI CSM (Compatibility Support Module) to support a legacy PC boot process.

■ Boot option filter

This item allows you to select which type of operating system to boot.

UEFI and Legacy: Allows booting from operating systems that support legacy option ROM or UEFI option ROM.

Legacy only: Allows booting from operating systems that only support legacy option ROM.

UEFI only: Allows booting from operating systems that only support UEFI option ROM.

This item is configurable only when CSM Support is set to Enabled.

■ PXE Function

This item allows you to enable or disable PXE function.

■ Storage

This setting allows you to select whether to enable the UEFI or legacy option ROM for the storage device controller.

Do not launch: Disables option ROM.

UEFI only: Enables UEFI option ROM only.

Legacy only: Enables legacy option ROM only.

■ Video


This item allows you to select whether to enable the UEFI or legacy option ROM for the storage device controller.

Do not launch: Disables option ROM.

UEFI only: Enables UEFI option ROM only.

Legacy only: Enables legacy option ROM only.

4.3.9 SATA Configuration

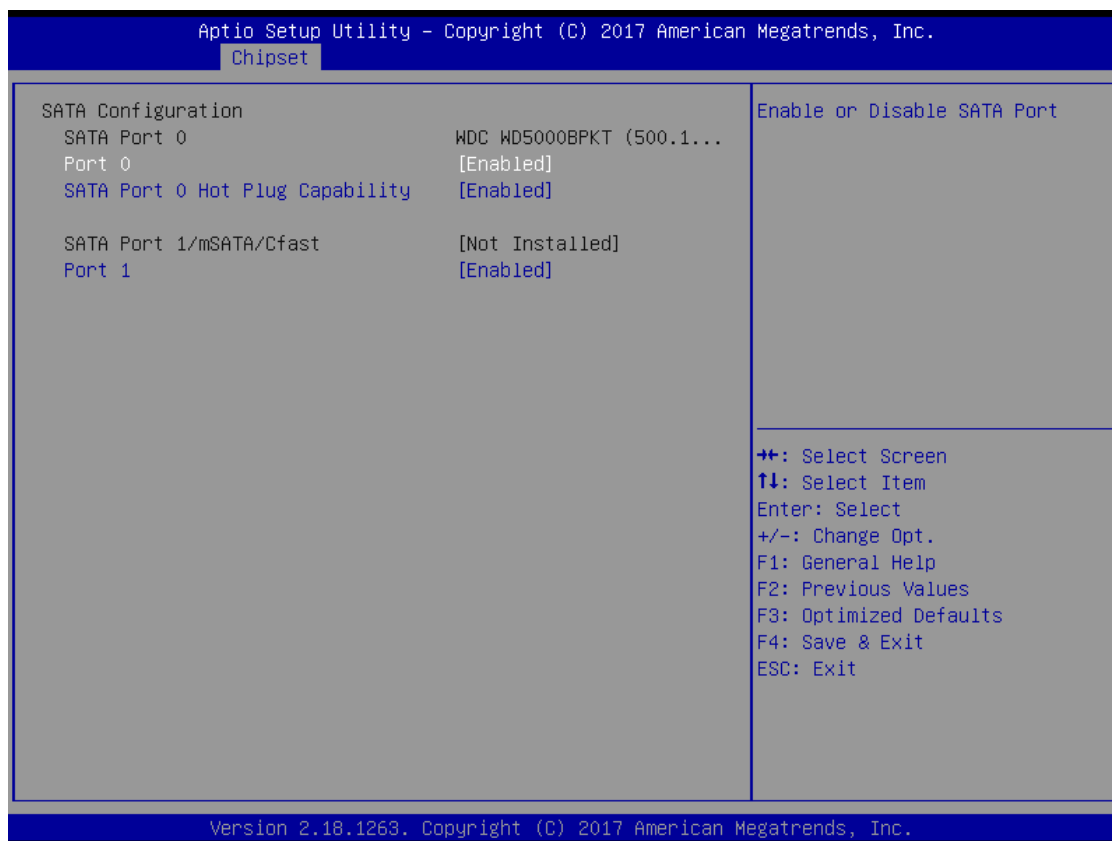

■ SATA Port 0

This item allows you to enable or disable SATA Port 0.


■ SATA Port 0 Hot Plug Capability

This item allows you to enable or disable SATA Port 0 hot plug function.

■ SATA Port 1/mSATA/CFast

This item allows you to enable or disable SATA Port 1.

4.3.10 USB Configuration

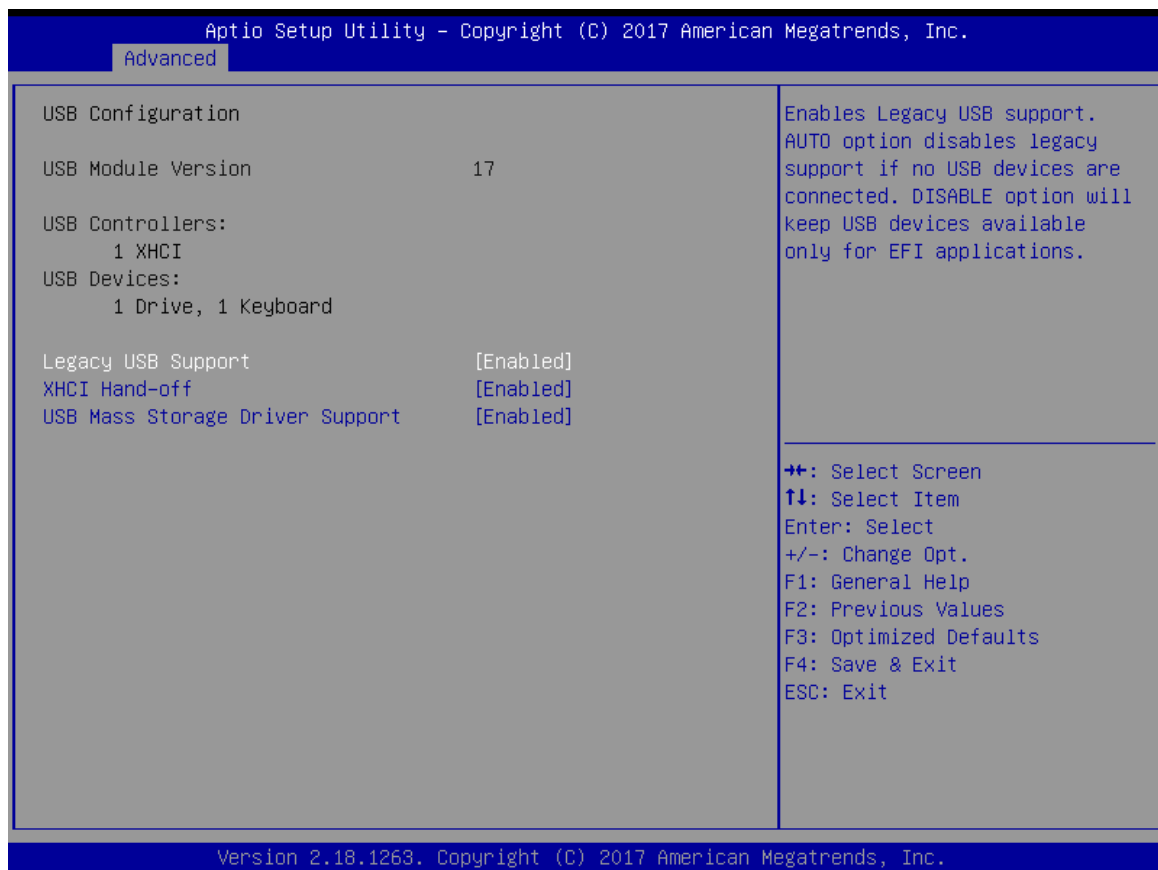

■ Legacy USB Support

Allows USB keyboard/ mouse to be used in MS-DOS.


■ XHCI Hand-off

Determines whether to enable XHCI (USB3.0) Hand-off feature for an operating system without XHCI (USB3.0) Hand-off support.

■ USB Mass Storage Driver Support


Enables or disables support for USB storage devices.

4.4 Chipset

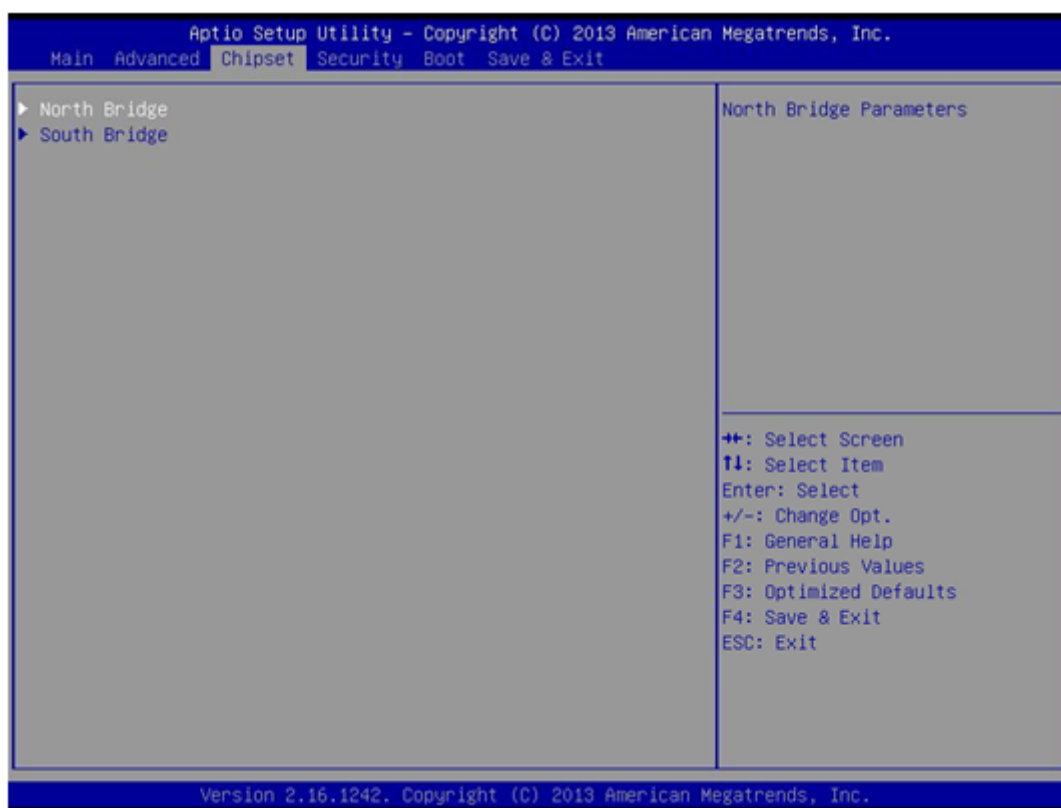


4.4.1 North Bridge

This section provides information on the installed memory size and memory/onboard graphics-related configuration options.

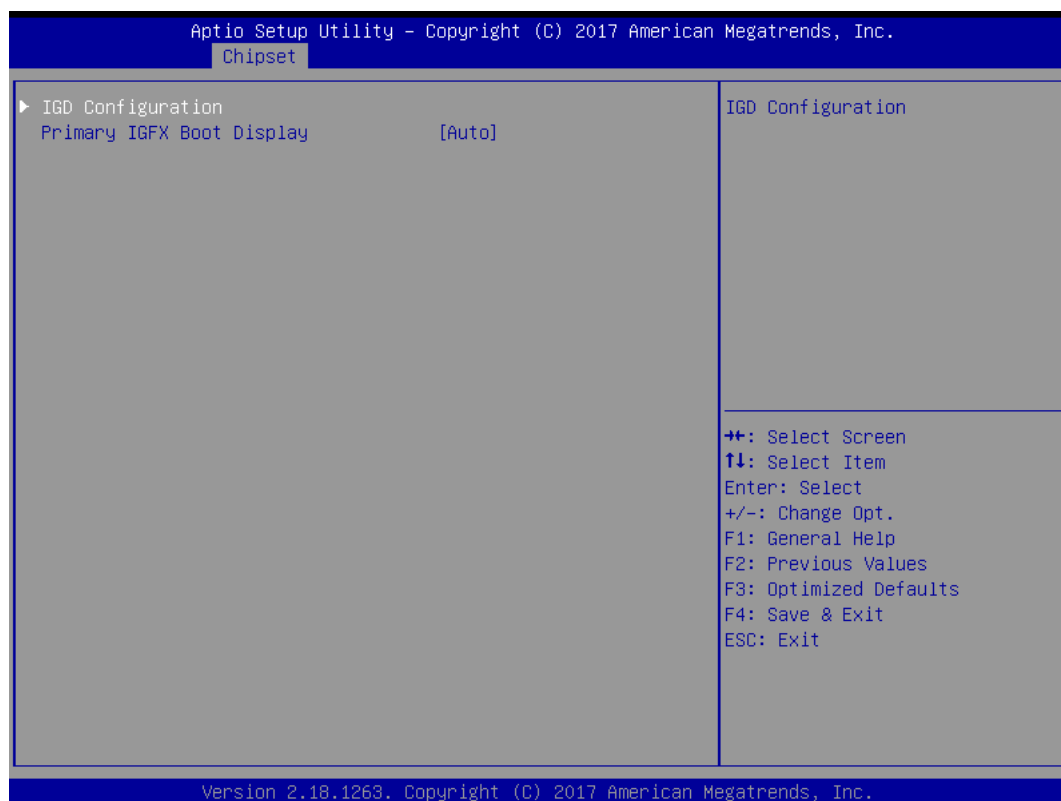

■ Intel IGD Configuration

This section provides onboard graphics-related configuration options.

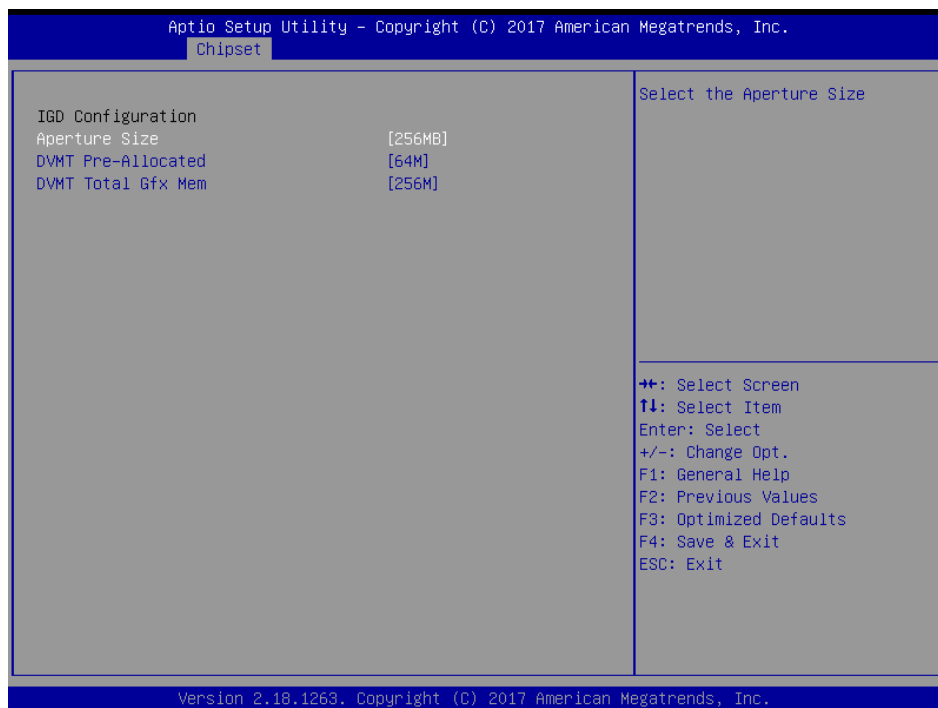

- **Aperture Size**

This item selects the Aperture Size. Select <128MB>, <256MB> or <512MB>.

- **DVMT Pre-Allocated**


This item selects DVMT 5.0 Pre-Allocated (Fixed) Graphics Memory size used by the Internal Graphics Device. . Select <64M>, <96M>, <128M>, <160M>, <192M>, <224M>, <256M>, <288M>, <320M>, <352M>, <384M>, <416M>, <448M>, <480M> or <512M>.

- **DVMT Total Gfx Mem**


This item selects DVMT5.0 Total Graphic Memory size used by the Internal Graphics Device. Select <128MB>, <256MB> or <Max>.

■ Primary IGFX Boot Display

Change the primary IGFX boot display. Select <Auto>, <DP>, <VGA> or <DVI>.

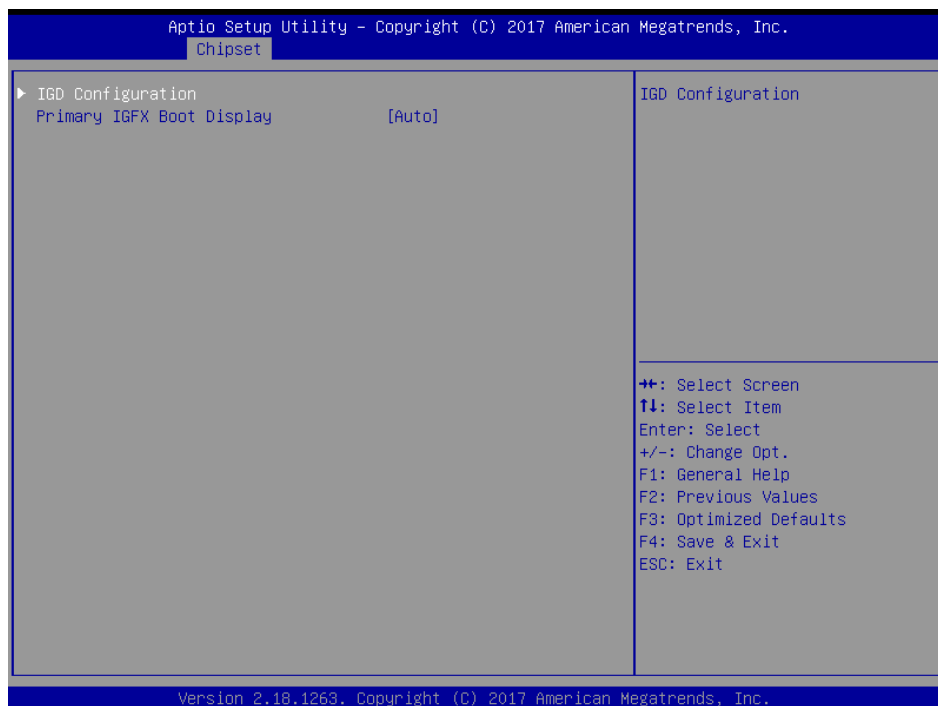

4.4.2 South Bridge

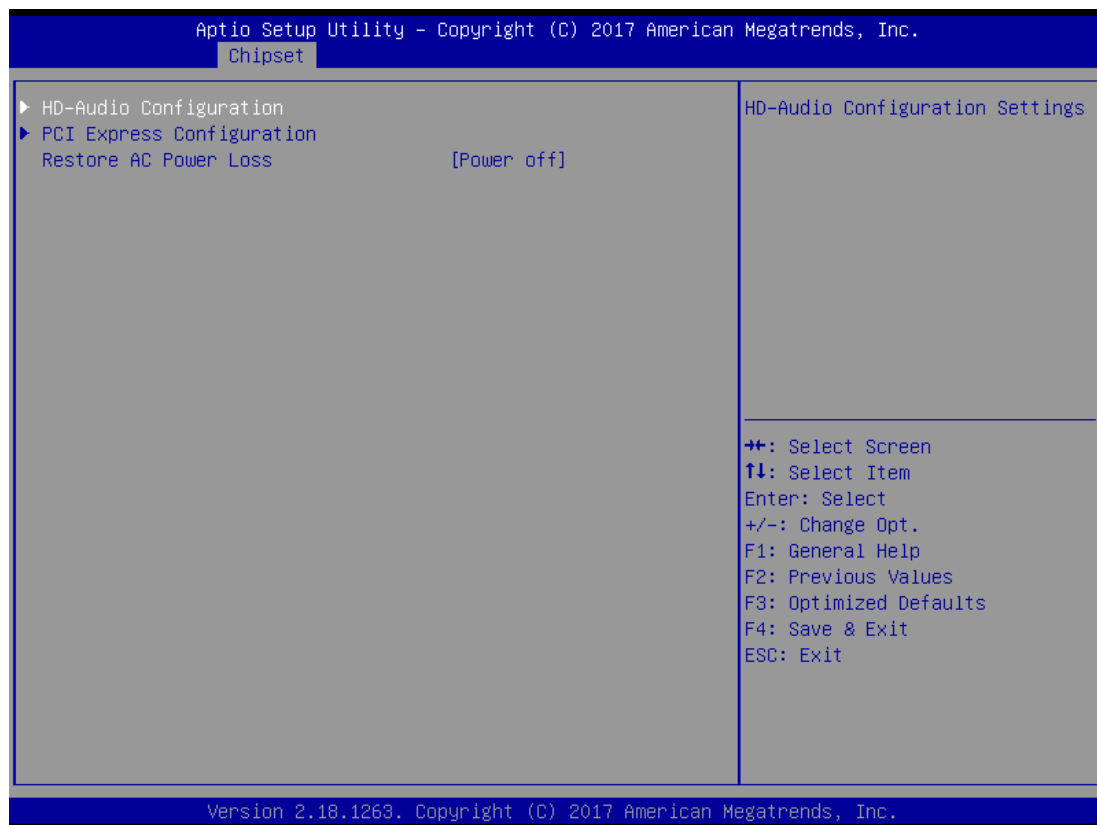

■ HD-Audio Configuration


Control detection of the HD-Audio.

● HD-Audio Support

Enabled: HD-Audio will be unconditionally enabled.

Disabled: HD-Audio will be unconditionally disabled.

■ PCI Express Configuration

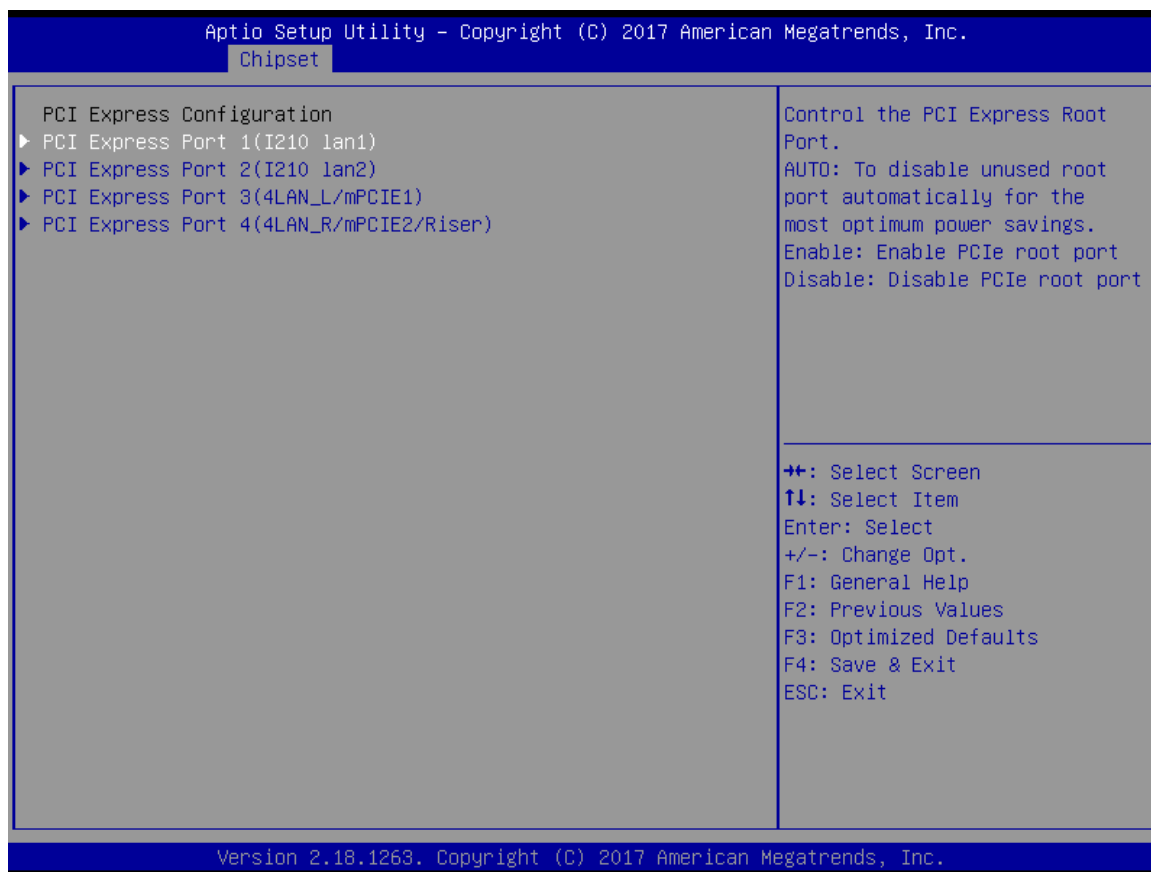

- **PCI Express Port 1 (I210 lan1)**

This item allows you to enable or disable PCI Express Port 1 (I210 lan1) in the Chipset.

- **Speed**

Change the PCIe Port Speed. Select <AUTO> ,<Gen 1> or <Gen 2>

- **PCI Express Port 2 (I210 lan2)**

This item allows you to enable or disable PCI Express Port 2 (I210 lan2) in the Chipset.

- **Speed**

Change the PCIe Port Speed. Select <AUTO> ,<Gen 1> or <Gen 2>

- **PCI Express Port 3 (4LAN_L/mPCIE1)**

This item allows you to enable or disable PCI Express Port 3 (4LAN_L/mPCIE1) in the Chipset.

- **Speed**

Change the PCIe Port Speed. Select <AUTO> ,<Gen 1> or <Gen 2>

- **PCI Express Port 4 (4LAN_R/mPCIE2/Riser)**

This item allows you to enable or disable PCI Express Port 4 ((4LAN_R/Mpcie2/Riser) in the Chipset.

- **Speed**

Change the PCIe Port Speed. Select <AUTO> ,<Gen 1> or <Gen 2>

■ Restore AC Power Loss

This item specifies whether your system will reboot after a power failure or interrupt occurs.

Available settings are:


Power Off: Leave the computer in the power off state.

Power On: Leave the computer in the power on state.

Last State: Restore the system to the previous status before power failure or interrupt occurred.

4.5 Security

Security menu allow you to change administrator password and user password settings.

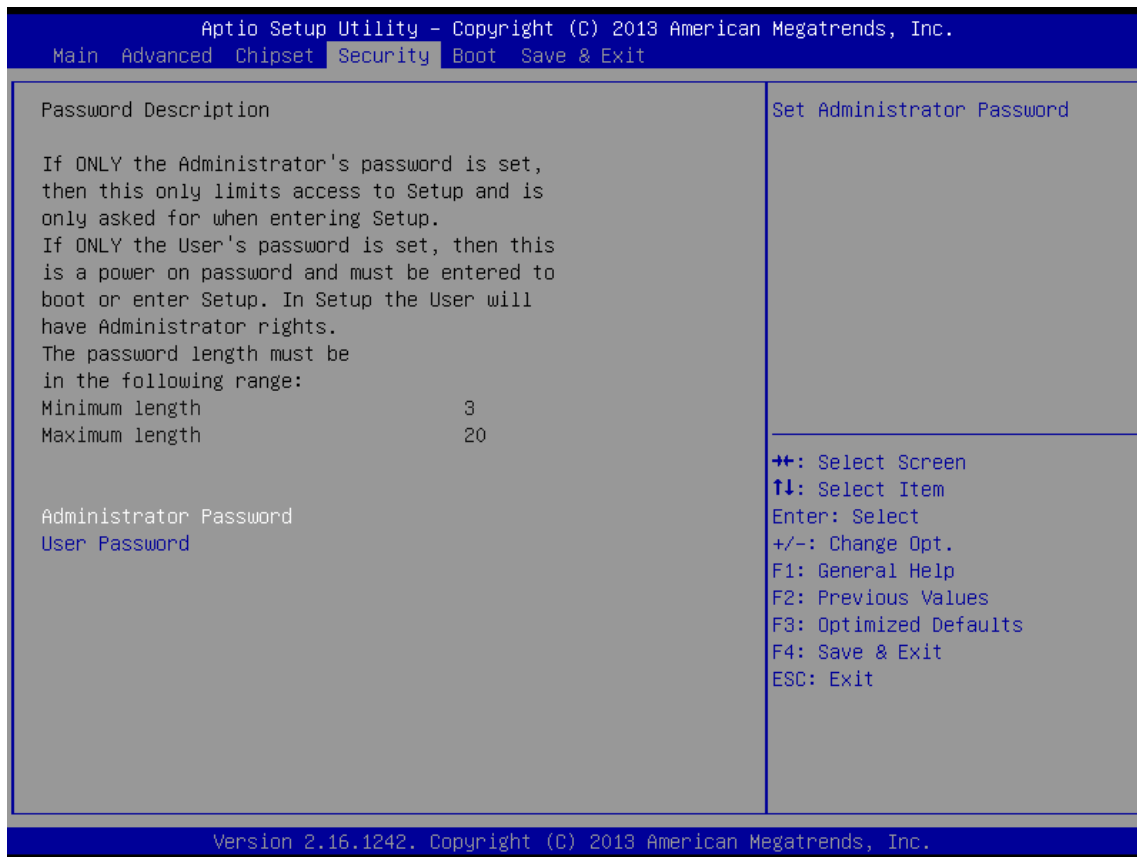

4.5.1 Administrator Password


This item allows you to set Administrator Password.

4.5.2 User Password

This item allows you to set User Password.

4.6 Boot

This menu allows you to setup the system boot options.

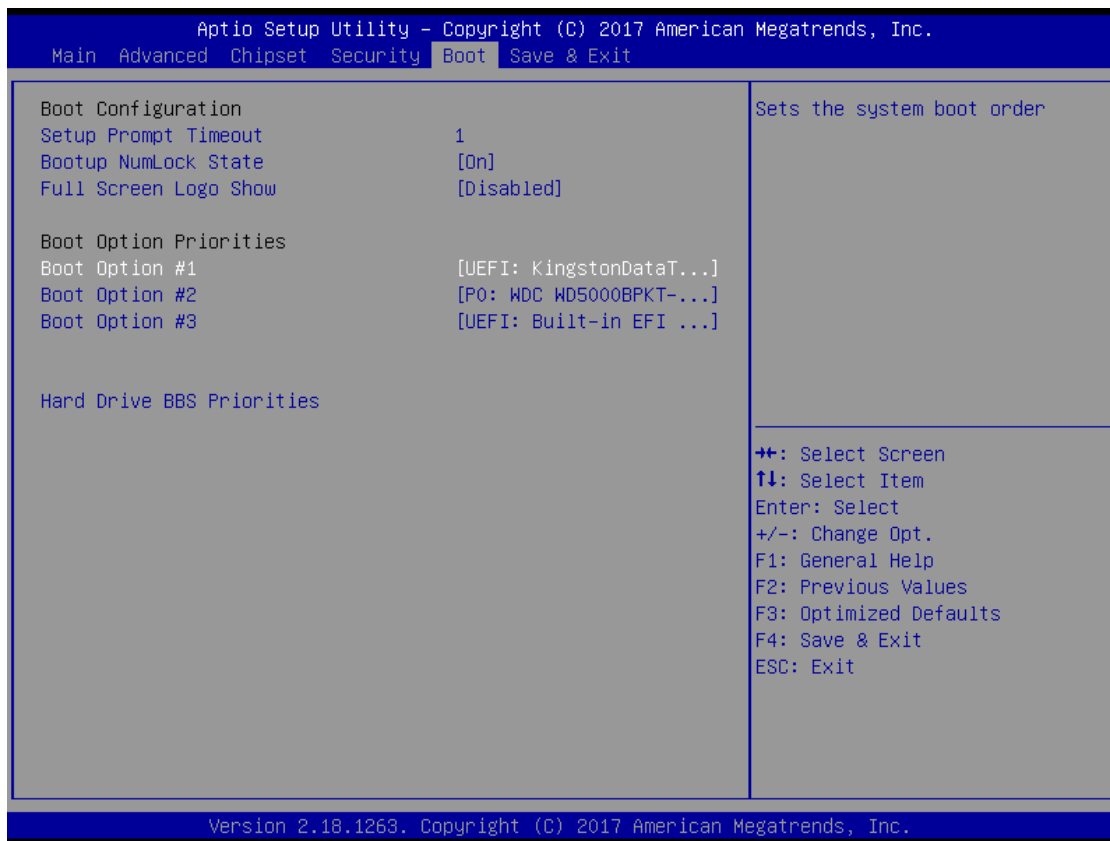

4.6.1 Setup Prompt Timeout

This item sets number of seconds to wait for setup activation key.

4.6.2 Bootup NumLock State

This item selects the keyboard NumLock state. Select <On> or <Off>.

4.6.3 Full Screen Logo Show


This item allows you to enable or disable Full Screen Logo Show function.

4.6.4 Boot Option Priorities

The items specify the boot device priority sequence from the available devices. The number of device items that appears on the screen depends on the number of devices installed in the system.

4.7 Save & Exit

This setting allows you to configure the boot settings.

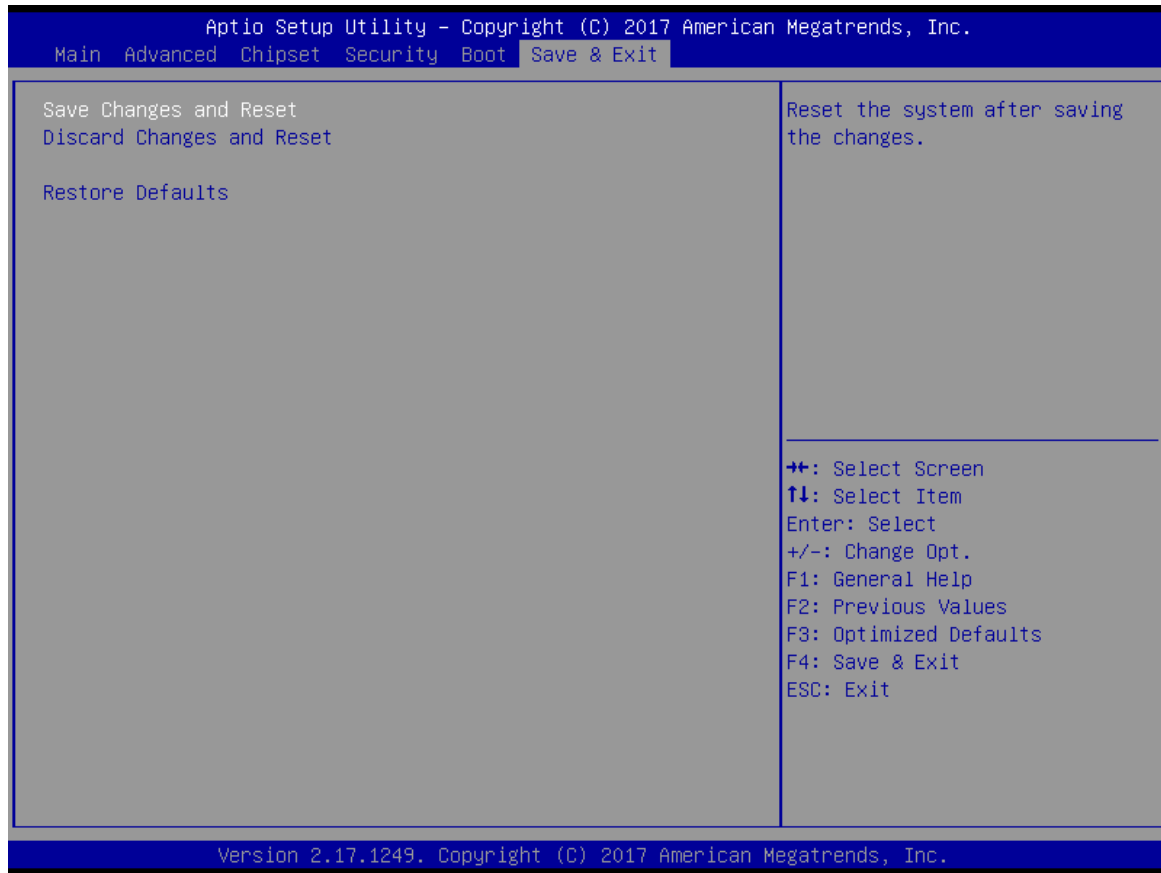

4.7.1 Save Changes and Reset

This item allows you reset the system after saving the changes.

4.7.2 Discard Changes and Reset

Select this option to quit Setup without making any permanent changes to the system configuration.

4.7.3 Restore Defaults

This selection allows you to reload the BIOS when problem occurs during system booting sequence. These configurations are factory settings optimized for this system.

Appendix

WDT & GPIO

This appendix provides the sample codes of WDT (Watch Dog Timer) and GPIO (General Purpose Input/ Output).

WDT Sample Code

```
// IO Address 0xA16 is time value
// IO Address 0xA15 is WDT enable and configuration
Example, Set 0xA16=0x03, 0xA15=0x31, it will reset after 3 seconds
```

```
#define TimePort    0xA16
#define TimeEnablePort 0xA15

WriteByte (TimePort,0x03)
WriteByte (TimeEnablePort,0x31)
```

Watchdog Timer Configuration Register 1 – base address + 05h

Bit	Name	R/W	Reset	Default	Description
7	Reserved	R	-	0	Reserved
6	WDTMOUT_STS	R/W	5VSB	0	If watchdog timeout event occurred, this bit will be set to 1. Write a 1 to this bit will clear it to 0.
5	WD_EN	R/W	5VSB	0	If this bit is set to 1, the counting of watchdog time is enabled.
4	WD_PULSE	R/W	5VSB	0	Select output mode (0: level, 1: pulse) of RSTOUT# by setting this bit.
3	WD_UNIT	R/W	5VSB	0	Select time unit (0: 1 sec, 1: 60 sec) of watchdog timer by setting this bit.
2	WD_HACTIVE	R/W	5VSB	0	Select output polarity of RSTOUT# (1: high active, 0: low active) by setting this bit.
1-0	WD_PSWIDTH	R/W	5VSB	0	Select output pulse width of RSTOUT# 0: 1 ms 1: 25 ms 2: 125 ms 3: 5 sec

Watchdog Timer Configuration Register 2 – base address + 06h

Bit	Name	R/W	Reset	Default	Description
7-0	WD_TIME	R/W	5VSB	0	Time of watchdog timer

GPIO Sample Code

● GPI 1 ~ GPI 8

	GPI 1	GPI 2	GPI 3	GPI 4	GPI 5	GPI 6	GPI 7	GPI 8
IO Address	0xA03h	0xA03h	0xA03h	0xA03h	0xA06h	0xA06h	0xA06h	0xA06h
Bit	4	5	6	7	0	1	2	3
Sample code	#1							

● GPO 1 ~ GPO 8

	GPO 1	GPO 2	GPO 3	GPO 4	GPO 5	GPO 6	GPO 7	GPO 8
IO Address	0xA02h	0xA02h	0xA02h	0xA02h	0xA06h	0xA07h	0xA08h	0xA04h
Bit	0	1	2	3	4	7	0	7
Sample code	#2							

```
#define GPI1to4_ADDR    0xA03
#define GPI5to8_ADDR    0xA06
```

```
#define GPO1to4_ADDR    0xA02
```

```
#define GPO5_ADDR        0xA06
#define GPO6_ADDR        0xA04
#define GPO7_ADDR        0xA08
#define GPO8_ADDR        0xA04
```

```
#define GPO1_DataHigh    0x01
#define GPO2_DataHigh    0x02
#define GPO3_DataHigh    0x04
#define GPO4_DataHigh    0x08
#define GPO5_DataHigh    0x10
#define GPO6_DataHigh    0x80
#define GPO7_DataHigh    0x01
#define GPO8_DataHigh    0x80
```

```
#define WriteByte    outputb
#define ReadByte     inportb
```

Sample Code:

```
#1 :  
// Get GPI 1 status  
//Get GPI 0 Pin Status Register  
printf("Input port value = %x\n", ReadByte(GPI1to4_ADDR)); // bit4 = GPI 1 status
```

```
// Get GPI 5 status  
//Get GPI 0 Pin Status Register  
printf("Input port value = %x\n", ReadByte(GPI_REG5to8)); // bit0 = GPI 5 status
```

```
#2 :  
// Set GPO status to high  
; Set GPO 1 Pin to High  
Data = ReadByte(GPO1to4_ADDR) | GPO1_DataHigh;  
WriteByte(GPO1to4_ADDR, Data); //Set IO_DO1 to High
```

```
; Set GPO 2 Pin to High  
Data = ReadByte(GPO1to4_ADDR) | GPO2_DataHigh;  
WriteByte(GPO1to4_ADDR, Data); //Set IO_DO2 to High
```

```
; Set GPO 3 Pin to High  
Data = ReadByte(GPO1to4_ADDR) | GPO3_DataHigh;  
WriteByte(GPO1to4_ADDR, Data); //Set IO_DO3 to High
```

```
; Set GPO 4 Pin to High  
Data = ReadByte(GPO1to4_ADDR) | GPO4_DataHigh;  
WriteByte(GPO1to4_ADDR, Data); //Set IO_DO4 to High
```

```
; Set GPO 5 Pin to High  
Data = ReadByte(GPO5_ADDR) | GPO5_DataHigh;  
WriteByte(GPO5_ADDR, Data); //Set IO_DO5 to High
```

```
; Set GPO 6 Pin to High  
Data = ReadByte(GPO6_ADDR) | GPO6_DataHigh;  
WriteByte(GPO6_ADDR, Data); //Set IO_DO6 to High
```

```
; Set GPO 7 Pin to High  
Data = ReadByte(GPO7_ADDR) | GPO7_DataHigh;  
WriteByte(GPO7_ADDR, Data); //Set IO_DO7 to High
```

```
; Set GPO 8 Pin to High  
Data = ReadByte(GPO8_ADDR) | GPO8_DataHigh;  
WriteByte(GPO8_ADDR, Data); //Set IO_DO8 to High
```

