

USER'S MANUAL

RCO-6000-ADL

AI Edge Inference Computer



Table of Contents

Prefaces	04
Revision	04
Disclaimer	04
Copyright Notice	04
Trademarks Acknowledgment	04
Environmental Protection Announcement	04
Safety Precautions	05
Technical Support and Assistance	06
Conventions Used in this Manual	06
Package Contents	07
Ordering Information	07
Optional Accessory	10
Chapter 1 Product Introductions	11
1.1 Overview	12
1.1.1 Key Feature	14
1.2 Hardware Specification	15
1.3 System I/O	19
1.3.1 RCO-6000-ADL	19
1.3.2 RCO-6000-ADL-2E16	21
1.3.3 RCO-6000-ADL-2E16-4B7M	23
1.3.4 RCO-6000-ADL-2E16-2B15M / RCO-6000-ADL-2E16-2N15M	25
1.3.5 RCO-6000-ADL-2E16-2PWR	27
1.3.6 RCO-6000-ADL-4NH	29
1.3.7 RCO-6000-ADL-4NS	31
1.3.8 RCO-6000-ADL-8NS	33
1.3.9 EDGEBoost I/O Bracket (Available EDGEBoost I/O)	35
1.4 Mechanical Dimension	36
1.4.1 RCO-6000-ADL	36
1.4.2 RCO-6000-ADL-2E16	37
1.4.3 RCO-6000-ADL-2E16-4B7M	38
1.4.4 RCO-6000-ADL-2E16-2B15M / RCO-6000-ADL-2E16-2N15M	39
1.4.5 RCO-6000-ADL-2E16-2PWR	40
1.4.6 RCO-6000-ADL-4NH	41
1.4.7 RCO-6000-ADL-4NS	42
1.4.8 RCO-6000-ADL-8NS	43
Chapter 2 Mechanical Specifications.....	44
2.1 Switch and connector Locations	45
2.1.1 Top View	45
2.1.2 Bottom View	46
2.2 Connector / Switch Definition	47
2.3 I/O Interface Descriptions	48
Chapter 3 System Setup	90
3.1 Set torque force to 3.5 kgf-cm to execute all the screwing and unscrewing	91
3.2 Separating the expansion module from main computer module.....	91
3.3 Removing chassis top cover	93
3.4 Installing CPU	94

3.5	Installing SODIMM	96
3.6	Installing CPU & SODIMM heat block	98
3.7	Installing M.2 SSD card	104
3.8	Installing WiFi Module	105
3.9	Installing Mini PCIe card / 4G LTE	108
3.10	Installing Antenna	109
3.11	Install HDD/SSD on the internal SATA bay	111
3.12	Installing HDD on removable SATA HDD/SSD bay	113
3.13	Installing HDD on removable HDD bay (RCO 6000 AD L 2E16 4B7M)	114
3.14	Installing HDD on removable HDD bay (RCO 6000 AD L 2 E16 2B15M)	116
3.15	Installing HDD on removable HDD bay (RCO 6000 ADL 8NS)	119
3.16	Installing PCIe expansion Card (for RCO 6000 ADL 2E16)	121
3.17	Installing PCIe/PCI expansion Card (for RCO 6000 ADL 8NS)	123
3.18	Appendix A Optional CANBus Cable	126
3.19	Installing wall mount kit	129
3.20	AC Adapter with 3P terminal block	131
3.21	AC Adapter with 4P terminal block	132
Chapter 4	BIOS Setup	133
4.1	BIOS Introduction	134
4.2	Main Setup	135
4.3	Advanced Setup	136
4.3.1	Connectivity Configuration	137
4.3.2	CPU Configuration	138
4.3.3	PCH-FW Configuration	140
4.3.4	SATA and RST Configuration	141
4.3.5	RST (UEFI RAID) Configuration	142
4.3.6	Trusted Computing	144
4.3.7	ACPI Settings	145
4.3.8	Super IO Configuration	145
4.3.9	Hardware Monitor	153
4.3.10	Power IGN Mode	155
4.3.11	Wake system from S5	156
4.3.12	Serial Port Console Redirection	157
4.3.13	USB Configuration	158
4.3.14	Network Stack Configuration	159
4.3.15	CSM Configuration	160
4.3.16	NVMe Configuration	161
4.4	Chipset	162
4.4.1	System Agent (SA) Configuration	162
4.4.2	PCH-IO Configuration	168
4.5	Security	172
4.6	Boot	175
4.7	Save & Exit	176
4.8	MEBx	177
Appendix WDT & GPIO		178
	WDT Sample Code	179
	GPIO Sample Code	180

Prefaces

Revision

Revision	Description	Date
1.0	Manual Released	2023/06/28

Disclaimer

All specifications and information in this User's Manual are believed to be accurate and up to date. C&T Solution Inc. does not guarantee that the contents herein are complete, true, accurate or non-misleading. The information in this document is subject to change without notice and does not represent a commitment on the part of C&T Solution Inc.

C&T Solution Inc. disclaims all warranties, express or implied, including, without limitation, those of merchantability, fitness for a particular purpose with respect to contents of this User's Manual. Users must take full responsibility for the application of the product.

Copyright Notice

All rights reserved. No part of this manual may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or information storage and retrieval systems, without the prior written permission of C&T Solution Inc. Copyright © C&T Solution Inc.

Trademarks Acknowledgment

Intel®, Celeron® and Pentium® are trademarks of Intel Corporation.

Windows® is registered trademark of Microsoft Corporation.


AMI is trademark of American Megatrend Inc.

IBM, XT, AT, PS/2 and Personal System/2 are trademarks of International Business Machines Corporation

All other products and trademarks mentioned in this manual are trademarks of their respective owners.

Environmental Protection Announcement

Do not dispose this electronic device into the trash while discarding. Please recycle to minimize pollution and ensure environment protection.



Safety Precautions

Before installing and using the equipment, please read the following precautions:

- Put this equipment on a reliable surface during installation. Dropping it or letting it fall could cause damage.
- The power outlet shall be installed near the equipment and shall be easily accessible.
- Turn off the system power and disconnect the power cord from its source before making any installation. Be sure both the system and the external devices are turned OFF. Sudden surge of power could ruin sensitive components. Make sure the equipment is properly grounded.
- When the power is connected, never open the equipment. The equipment should be opened only by qualified service personnel.
- Make sure the voltage of the power source is correct before connecting the equipment to the power outlet.
- Disconnect this equipment from the power before cleaning. Use a damp cloth. Do not use liquid or spray detergents for cleaning.
- Avoid the dusty, humidity and temperature extremes.
- Do not place heavy objects on the equipment.
- If the equipment is not used for long time, disconnect it from the power to avoid being damaged by transient over-voltage.
- The storage temperature shall be above -30°C and below 85°C.
- The computer is provided with a battery-powered real-time clock circuit. There is a danger of explosion if incorrectly replaced. Replace only with the same or equivalent type recommended by the manufacturer.
- If one of the following situation arises, get the equipment checked by service personnel:
 - The power cord or plug is damaged.
 - Liquid has penetrated into the equipment.
 - The equipment has been exposed to moisture.
 - The equipment does not work well or it cannot work according to the user's manual.
 - The equipment has been dropped and damaged.
 - The equipment has obvious signs of breakage.

Technical Support and Assistance

1. Visit the C&T Solution Inc website at <https://www.candtsolution.com> where you can find the latest information about the product.
2. Contact your distributor, our technical support team or sales representative for technical support if you need additional assistance. Please have following information ready before you call:
 - Model name and serial number
 - Description of your peripheral attachments
 - Description of your software (operating system, version, application software, etc.)
 - A complete description of the problem
 - The exact wording of any error messages

Conventions Used in this Manual



WARNING

This indication alerts operators to an operation that, if not strictly observed, may result in severe injury.



CAUTION

This indication alerts operators to an operation that, if not strictly observed, may result in safety hazards to personnel or damage to equipment.



NOTE

This indication provides additional information to complete a task easily.

Package Contents

Before installation, please ensure all the items listed in the following table are included in the package.

Item	Description	Q'ty
1	<u>Choosing one :</u> • RCO-6000-ADL Superior Fanless Industrial Computer • RCO-6000-ADL-2E16 Superior Fanless Industrial Computer • RCO-6000-ADL-2E16-4B7M Flash Storage Computing • RCO-6000-ADL-2E16-2PWR GPU Computing System • RCO-6000-ADL-4NH AI Edge Inference Computer • RCO-6000-ADL-4NS AI Edge Inference Computer • RCO-6000-ADL-8NS AI Edge Inference Computer	1
2	Wall Mount Kit	1
3	Accessory Kit	1
4	DVI to VGA Adapter	1

Ordering Information

Model No.	Product Description
RCO-6000-ADL	Industrial Computer w/ LGA 1700 for Intel 12/13th Gen CPU & R680E PCH Available EDGEBoost I/O : • 4L : 4x LAN Ports • 4P : 4x LAN PoE Ports • 8L : 8x LAN Ports • 8P : 8x LAN PoE Ports • D10G : 2x 10Gb Ports • 4U3 : 4x USB 3.2 Gen 1 Ports • 8U3 : 8x USB 3.2 Gen 1 Ports • 4LM12 : 4x M12 LAN Ports • 4PM12 : 4x M12 LAN PoE Ports • 8LM12 : 8x M12 LAN Ports • 8PM12 : 8x M12 LAN PoE Ports • 5G : 2x 5G SIM Slots • 2x M.2 B-Key (1x 5G SIM) • 1x M.2 M-Key (4-Lane)
RCO-6000-ADL-2E16	Industrial Computer w/ LGA 1700 for Intel 12/13th Gen CPU & R680E PCH, 1x PCIe x16 (Gen4), 1x PCIe x1 (Gen3) Available Expansion : • 2E16 : 1x PCIe x16 (Gen4), 1x PCIe x1 (Gen3) • 2E8 (Optional) : 1x PCIe x16 (8-lane, Gen4), 1x PCIe x8 (8-lane, Gen4) Available EDGEBoost I/O : • 4L : 4x LAN Ports • 4P : 4x LAN PoE Ports • 8L : 8x LAN Ports • 8P : 8x LAN PoE Ports • D10G : 2x 10Gb Ports • 4U3 : 4x USB 3.2 Gen 1 Ports • 8U3 : 8x USB 3.2 Gen 1 Ports • 4LM12 : 4x M12 LAN Ports • 4PM12 : 4x M12 LAN PoE Ports • 8LM12 : 8x M12 LAN Ports • 8PM12 : 8x M12 LAN PoE Ports • 5G : 2x 5G SIM Slots • 2x M.2 B-Key (1x 5G SIM) • 1x M.2 M-Key (4-Lane)

Model No.	Product Description
RCO-6000-ADL-2E16-2PWR	AI Edge Inference Computer with LGA 1700 for Intel 12/13th Gen Processor and R680E PCH, 1x PCIe x16 (Gen4), 1x PCIe x1 (Gen3), 2x Power input Available Expansion : • 2E16 : 1x PCIe x16 (Gen4), 1x PCIe x1 (Gen3) • 2E8 (Optional) : 1x PCIe x16 (8-lane, Gen4), 1x PCIe x8 (8-lane, Gen4) Available EDGEBoost I/O : • 4L : 4x LAN Ports • 4P : 4x LAN PoE Ports • 8L : 8x LAN Ports • 8P : 8x LAN PoE Ports • D10G : 2x 10Gb Ports • 4U3 : 4x USB 3.2 Gen 1 Ports • 8U3 : 8x USB 3.2 Gen 1 Ports • 4LM12 : 4x M12 LAN Ports • 4PM12 : 4x M12 LAN PoE Ports • 8LM12 : 8x M12 LAN Ports • 8PM12 : 8x M12 LAN PoE Ports • 5G : 2x 5G SIM Slots • 2x M.2 B-Key (1x 5G SIM) • 1x M.2 M-Key (4-Lane)
RCO-6000-ADL-2E16-4B7M	AI Edge Inference Computer W/ LGA 1700 for Intel 12/13th Gen CPU & R680E PCH, 2x LAN, 6x HDD, 1x PCIe x16 (Gen4), 1x PCIe x1 (Gen3) Model optional : • RCO-6000-ADL-2E16-2B15M • RCO-6000-ADL-2E16-2N15M Available Storage Expansion : • 4B7M : 4 Bay 7mm Hot-swappable 2.5" SATA HDD/SSD Bay • 2B15M : 2 Bay 15mm Hot-swappable 2.5" SATA HDD/SSD Bay • 2N15M : 2 Bay 15mm Hot-swappable 2.5" NVMe Bay Available Expansion : • 2E16 : 1x PCIe x16 (Gen4), 1x PCIe x1 (Gen3) • 2E8 (Optional) : 1x PCIe x16 (8-lane, Gen4), 1x PCIe x8 (8-lane, Gen4) Available EDGEBoost I/O : • 4L : 4x LAN Ports • 4P : 4x LAN PoE Ports • 8L : 8x LAN Ports • 8P : 8x LAN PoE Ports • D10G : 2x 10Gb Ports • 4U3 : 4x USB 3.2 Gen 1 Ports • 8U3 : 8x USB 3.2 Gen 1 Ports • 4LM12 : 4x M12 LAN Ports • 4PM12 : 4x M12 LAN PoE Ports • 8LM12 : 8x M12 LAN Ports • 8PM12 : 8x M12 LAN PoE Ports • 5G : 2x 5G SIM Slots • 2x M.2 B-Key (1x 5G SIM) • 1x M.2 M-Key (4-Lane)

Model No.	Product Description
RCO-6000-ADL-4NS	AI Edge Inference Computer w/ LGA 1700 for Intel 12/13th Gen CPU & R680E PCH, 4x U.2 15mm NVMe, Software RAID Available EDGEBoost I/O : 4L : 4x LAN Ports 4P : 4x LAN PoE Ports 8L : 8x LAN Ports 8P : 8x LAN PoE Ports - D10G : 2x 10Gb Ports 4U3 : 4x USB 3.2 Gen 1 Ports 8U3 : 8x USB 3.2 Gen 1 Ports 4LM12 : 4x M12 LAN Ports 4PM12 : 4x M12 LAN PoE Ports 8LM12 : 8x M12 LAN Ports 8PM12 : 8x M12 LAN PoE Ports 5G : 2x 5G SIM Slots 2x M.2 B-Key (1x 5G SIM) 1x M.2 M-Key (4-Lane)
RCO-6000-ADL-4NH	AI Edge Inference Computer w/ LGA 1700 for Intel 12/13th Gen CPU & R680E PCH, 4x U.2 15mm NVMe, Hardware RAID Available EDGEBoost I/O : 4L : 4x LAN Ports 4P : 4x LAN PoE Ports 8L : 8x LAN Ports 8P : 8x LAN PoE Ports - D10G : 2x 10Gb Ports 4U3 : 4x USB 3.2 Gen 1 Ports 8U3 : 8x USB 3.2 Gen 1 Ports 4LM12 : 4x M12 LAN Ports 4PM12 : 4x M12 LAN PoE Ports 8LM12 : 8x M12 LAN Ports 8PM12 : 8x M12 LAN PoE Ports 5G : 2x 5G SIM Slots 2x M.2 B-Key (1x 5G SIM) 1x M.2 M-Key (4-Lane)
RCO-6000-ADL-8NS	AI Edge Inference Computer w/ LGA 1700 for Intel 12/13th Gen CPU & R680E PCH, Flash Storage 8x U.2 NVMe Bay, 1x PCIe x4 (1-lane) Expansion Available EDGEBoost I/O : 4L : 4x LAN Ports 4P : 4x LAN PoE Ports 8L : 8x LAN Ports 8P : 8x LAN PoE Ports - D10G : 2x 10Gb Ports 4U3 : 4x USB 3.2 Gen 1 Ports 8U3 : 8x USB 3.2 Gen 1 Ports 4LM12 : 4x M12 LAN Ports 4PM12 : 4x M12 LAN PoE Ports 8LM12 : 8x M12 LAN Ports 8PM12 : 8x M12 LAN PoE Ports 5G : 2x 5G SIM Slots 2x M.2 B-Key (1x 5G SIM) 1x M.2 M-Key (4-Lane)

Optional Accessories

Model No.	Product Description
1-E09A22102	Adapter AC/DC 24V 9.2A 220W with 3pin Terminal Block Plug 5.0mm Pitch
1-E09A22801	Adapter AC/DC 24V/11.67A 280W with 3pin Terminal Block Plug 5.0mm Pitch
1-E09A36001	Adapter AC/DC 24V/15A 360W with 3pin Terminal Block Plug 5.0mm Pitch
SFICBL022	Power Cord, 3-pin US Type, 180cm
1-TPCD00002	Power Cord, European Type, 180cm
1-TPCD00001	Power Cord, 3-pin UK Type, 180cm

Chapter 1

Product Introductions

1.1 Overview

The Superior Embedded Systems RCO-6000-ADL series are designed with rich I/O, high flexibility and easy expansion capabilities which are ideal for diverse industrial applications. Support 12/13th Gen. Intel® Core™ i9/i7/i3 or Intel® Pentium®/Intel® Celeron® Desktop processor, RCO-6000-ADL Series is an extreme features integration, outstanding system performance, versatile I/O connections, and rugged reliability fanless embedded systems. It offers dramatically enhanced CPU and graphics performance, wide power and feature advanced features, rich connectivity interfaces, wide range power input, and high reliability even operating in temperature extremes.

Model No.	Rear Panel	Front Panel
RCO-6000-ADL		
RCO-6000-ADL-2E16 1x PCIe x16 (Gen4), 1x PCIe x1 (Gen3)		
RCO-6000-ADL-2E16-2PWR 1x PCIe x16 (Gen4), 1x PCIe x1 (Gen3), 2x Power input		
RCO-6000-ADL-2E16-4B7M 1x PCIe x16 (Gen4), 1x PCIe x1 (Gen3), 4x Removable 2.5" SATA HDD Bay		
RCO-6000-ADL-2E16-2B15M 1x PCIe x16 (Gen4), 1x PCIe x1 (Gen3), 2x Removable 2.5" SATA HDD Bay		
RCO-6000-ADL-2E16-2N15M 1x PCIe x16 (Gen4), 1x PCIe x1 (Gen3), 2x Removable 2.5" U.2 NVMe Bay		

Model No.	Rear Panel	Front Panel
RCO-6000-ADL-4NS 4x U.2 15mm NVMe, Software RAID		
RCO-6000-ADL-4NH 4 Bay U.2 15mm, Hardware RAID		
RCO-6000-ADL-8NS 8 Bay U.2 7mm		

1.1.1 Key Features

- LGA 1700 socket for 12/13th Gen. Intel® ALD-S & RPL-S Processor (65W/35W TDP)
- Intel® R680E Chipset
- 2x DDR5 4800/5600MHz SODIMM. Max. up to 64GB
- Triple Independent Display by 1x DVI-I and 2x DisplayPort
- 2x Intel® 2.5 GbE supporting Wake-on-LAN and PXE
- 2x Full-size Mini PCIe for communication or expansion modules, 2x SIM socket
- 2x 2.5" SATA HDD Bay (1x Internal) and with RAID 0, 1 support
- 1x M.2 (E Key, PCIe x1, USB 2.0, 2230, Support CNVi)
- 6x RS-232/422/485 (4x internal), 8x USB 3.2 Gen 2, 1x USB 3.2 Gen 1 (internal)
- 8x DI + 8x DO with isolation
- 9 to 48VDC Wide Range Power Input Supporting AT/ATX Mode
- Wide Operating Temperature -25°C to 70°C (35W CPU); -25°C to 60°C (65W CPU)
- TPM 2.0 Supported

Features	Model No.
1x PCIe x16 (Gen4), 1x PCIe x1 (Gen3) Expansion	• RCO-6000-ADL-2E16 • RCO-6000-ADL-2E16-2PWR • RCO-6000-ADL-2E16-4B7M • RCO-6000-ADL-2E16-2B15M • RCO-6000-ADL-2E16-2N15M
1x PCIe x16 (8-lane, Gen4), 1x PCIe x8 (8-lane, Gen4) Expansion	• RCO-6000-ADL-2E8 • RCO-6000-ADL-2E8-2PWR • RCO-6000-ADL-2E8-4B7M • RCO-6000-ADL-2E8-2B15M • RCO-6000-ADL-2E8-2N15M
2x Power input	• RCO-6000-ADL-2E16-2PWR • RCO-6000-ADL-2E8-2PWR
Storage Expansion: 4x 7mm Hot-swappable 2.5" SATA HDD/SSD Bay Support RAID 0, 1, 5, 10	• RCO-6000-ADL-2E16-4B7M • RCO-6000-ADL-2E8-4B7M
Storage Expansion: 2x 15mm Hot-swappable 2.5" SATA HDD/SSD Bay Support RAID 0, 1, 5, 10	• RCO-6000-ADL-2E16-2B15M • RCO-6000-ADL-2E8-2B15M
Storage Expansion: 2x 15mm Hot-swappable 2.5" U.2 NVMe Bay, Support RAID 0, 1	• RCO-6000-ADL-2E16-2N15M • RCO-6000-ADL-2E8-2N15M
Storage Expansion: 2x Removable 2 Bay NVMe SSD Module (15mm) with RAID 0, 1, 5, 10 support	• RCO-6000-ADL-4NS
Storage Expansion: 2x Removable 2 Bay NVMe SSD Module (15mm) with Hardware RAID 0, 1, 5, 6, 10 support	• RCO-6000-ADL-4NH
Storage Expansion: 2x Removable 4 Bay NVMe SSD Module (7mm) with RAID 0, 1, 5, 10 support	• RCO-6000-ADL-8NS

1.2 Hardware Specification

System

Processor

Support 12/13th Gen Intel® ADL-S & RPL-S Processor (LGA 1700, 65W/35W TDP)

- Intel® Core™ i9-13900E/i9-12900E, up to 24 Cores, 36MB Cache, up to 5.2 GHz, 65W
- Intel® Core™ i9-13900TE/i9-12900TE, up to 24 Cores, 36MB Cache, up to 5 GHz, 35W
- Intel® Core™ i7-13700E/i7-12700E, up to 16 Core, 30MB Cache, up to 5.1 GHz, 65W
- Intel® Core™ i7-13700TE/i7-12700TE, up to 16 Cores, 30MB cache, up to 4.8 GHz, 35W
- Intel® Core™ i5-13500E/i5-12500E, up to 14 Cores, 24MB Cache, up to 4.6 GHz, 65 W
- Intel® Core™ i5-13500TE/i5-12500TE, up to 14 Core, 24MB Cache, up to 4.5 GHz, 35W
- Intel® Core™ i3-13100E/i3-12100E, up to 8 Cores, 12MB cache, up to 4.4 GHz, 60W
- Intel® Core™ i3-12100TE/i3-12100TE, up to 4 Cores, 12MB Cache, up to 4.1 GHz, 35W
- Intel® Pentium® G7400E, 2 Cores, 6MB Cache, 3.6 GHz, 46W
- Intel® Pentium® G7400TE, 2 Cores, 6MB Cache, 3.0 GHz, 35W
- Intel® Celeron® G6900E, 2 Cores, 4MB Cache, 3.0 GHz, 46W
- Intel® Celeron® G6900TE, 2 Cores, 4MB Cache, 2.4 GHz, 35W

System Chipset	Intel® R680E Express Chipset
LAN Chipset	2.5 GbE1: Intel I226, Support Wake-on-LAN and PXE, Support TSN 2.5 GbE2: Intel I226, Support Wake-on-LAN and PXE, Support TSN
Audio Codec	Realtek ALC888S
System Memory	2x 262-Pin DDR5 4800/5600MHz SODIMM. Max. up to 64GB (ECC and Non-ECC)
Graphics	Intel® UHD Graphics 770/710
BIOS	AMI 256Mbit SPI BIOS
Watchdog	Software Programmable Supports 1~255 sec. System Reset
TPM	TPM 2.0

Display

DisplayPort	2x DisplayPort, Support resolution 5120 x 3200, Up to 7680 x 4320
DVI	1x DVI-I, support resolution 1920 x 1200
Multiple Display	Triple Display
VGA	Yes (by optional split cable)

Storage	M.2	SIM Socket	SATA SSD/HDD
RCO-6000-ADL	1x M.2 B Key, 2242/3042/3052 (PCIe x2, Support AI Module/NVMe Storage) (PCIe x1 & USB 3.2 Gen1, Support 4G/5G)	2x External SIM socket (Mini PCIE attached)	1x Internal 2.5" SATA/SSD HDD Bay (support H=9mm)
RCO-6000-ADL-2E16			1x Removable 2.5" SATA HDD Bay (support H=7mm, Hot-swappable)
RCO-6000-ADL-2E16-2PWR			Support RAID 0, 1
RCO-6000-ADL-2E16-4B7M			1x Internal 2.5" SATA/SSD HDD Bay (support H=9mm)
RCO-6000-ADL-2E16-2B15M			5x 7mm Hot-swappable 2.5" SATA HDD/SSD Bay Support RAID 0, 1, 5, 10
RCO-6000-ADL-2E16-2N15M			1x Internal 2.5" SATA/SSD HDD Bay (support H=9mm)
RCO-6000-ADL-4NS			1x 7mm, 2x 15mm Hot-swappable 2.5" SATA HDD/SSD Bay
RCO-6000-ADL-4NH			Support RAID 0, 1, 5, 10
RCO-6000-ADL-8NS			1x Internal 2.5" SATA/SSD HDD Bay (support H=9mm)
			1x Removable 2.5" SATA HDD Bay (support H=7mm, Hot-swappable)
			Support RAID 0, 1

NVMe Storage

RCO-6000-ADL-2E16-2N15M	2x Removable 2.5" U.2 NVMe Bay (support H=15mm, Hot-swappable, Optional) Support RAID 0, 1
RCO-6000-ADL-4NS	2x Removable 2 Bay NVMe SSD Module (15mm) with RAID 0, 1, 5, 10 support
RCO-6000-ADL-4NH	2x Removable 2 Bay NVMe SSD Module (15mm) with Hardware RAID 0, 1, 5, 6, 10 support
RCO-6000-ADL-8NS	2x Removable 4 Bay NVMe SSD Module (7mm) with RAID 0, 1, 5, 10 support

Expansion

Mini PCIe	1x Full-size Mini PCIe (1x shared by 1x mSATA)
PCIe	1x PCIe x16 (Gen4), 1x PCIe x1 (Gen3) : Model No : RCO-6000-ADL-2E16 RCO-6000-ADL-2E16-2PWR RCO-6000-ADL-2E16-4B7M 1x PCIe x16 (8-lane, Gen4), 1x PCIe x8 (8-lane, Gen4) : Model No : RCO-6000-ADL-2E8 RCO-6000-ADL-2E8-2PWR RCO-6000-ADL-2E8-4B7M
Expansion EDGEBoost I/O	Occupied One EDGEBoost I/O Slot: 4-port GbE module with Intel® I350 Chipset, RJ-45 or M12 connector (PoE optional) 2-Port RJ45 10GbE with Intel X710 Chipset 4-Port USB with Renesas uPD720201K8 host controller (share PCIe Gen2 x1 bandwidth) 1x M.2 for 5G (B Key, PCIe x1, USB 3.0, 3042/3052), Including 2x SIM socket, 1x SIM switch (1x EDGEBoost I/O Slot Only) 1x M.2 B-Key, 2242 for AI/NVMe Module, 1x M.2 B-Key, 3042/3052 for 5G/AI/NVMe Module (1x EDGEBoost I/O Slot Only) 1x M.2 M-Key, PCIe x4 Lane, 2242/2260 for AI Module and NVMe Storage
Ethernet	4x 802.3at Compliant PoE Port, The Maximum DC Power Delivery on Each PoE is 25.5W [RCO-6000-ADL-4P Series and RCO-6000-ADL-4PM12 Series only] 8x 802.3at Compliant PoE Port, The Maximum DC Power Delivery on Each PoE is 25.5W. 80W total power budget [RCO-6000-ADL-8P Series and RCO-6000-ADL-8PM12 Series only]

Operating System

Windows	Windows 10
Linux	Linux kernel

I/O

Audio	1x Mic-in, 1x Line-out
CAN	2x CAN 2.0 A/B 2-pin Internal header
COM	2x RS-232/422/485 ; 6x RS-232/422/485 (internal)
DIO	8 in / 8 out (Isolated)
LAN	2x RJ45
EDGEBoost I/O Bracket	2x EDGEBoost I/O Bracket (By mini PCIe interface)
USB	8x USB 3.2 Gen 2 (10 Gbps) 1x USB 3.2 Gen 1 (5 Gbps, 1x Internal) 2x USB 2.0 (internal)
Others	5x WiFi Antenna Holes 1x Power Switch, 1x AT/ATX Switch, 1x Remote Power On/Off 1x PC/Car Mode Switch 1x Removable CMOS Battery

Power

Power Adapter	Optional AC/DC 24V/9.2A, 220W Optional AC/DC 24V/11.67A, 280W (GPU/Card Expansion) Optional AC/DC 24V/15A, 360W (i7/i9 CPU/GPU/Card Expansion)
Power Mode	AT, ATX
Power Ignition Sensing	Power Ignition Management
Power Supply Voltage	RCO-6000-ADL / RCO-6000-ADL-2E16 / RCO-6000-ADL-2E16-4B7M : 9~48VDC
	RCO-6000-ADL-2E16-2PWR / RCO-6000-ADL-4NS / RCO-6000-ADL-4NH / RCO-6000-ADL-8NS : 2x Power Input 9~48VDC 12~48VDC for GPU/Card Expansion
Power Connector	RCO-6000-ADL / RCO-6000-ADL-2E16 / RCO-6000-ADL-2E16-4B7M : 5-pin Terminal Block
	RCO-6000-ADL-2E16-2PWR : 5-pin Terminal Block 4-pin Terminal Block for GPU Expansion
	RCO-6000-ADL-4NS / RCO-6000-ADL-4NH / RCO-6000-ADL-8NS : 5-pin Terminal Block 4-pin Terminal Block for NVMe EDGEBoost Node (12V requires 4-pin terminal block)
Power Protection	OVP (Over Voltage Protection); OCP (Over Current Protection) Reserve Protection

Environment

Operating Temp.	-25°C to 70°C (35W CPU) -25°C to 60°C (65W CPU, i9 CPU Requires an External FAN Kit) RCO-6000-ADL-2E16-2PWR / RCO-6000-ADL-4NH / RCO-6000-ADL-4NS / RCO-6000-ADL-8NS : -25°C to 60°C (35W CPU), (65W CPU, i9 CPU Requires an External FAN Kit)
Storage Temp.	-30°C to 85°C
Relative Humidity	10% to 95% (non-condensing)
Standards / Certification	CE, FCC Class A
Vibration	With SSD: 5 Grms, 5 - 500 Hz, 0.5 hr/axis With HDD: 1 Grms, 5 - 500 Hz, 0.5 hr/axis RCO-6000-ADL-2E16-2PWR / RCO-6000-ADL-4NS / RCO-6000-ADL-4NH / RCO-6000-ADL-8NS : With SSD: 3 Grms, 5 - 500 Hz, 0.5 hr/axis With HDD: 1 Grms, 5 - 500 Hz, 0.5 hr/axis
Shock	With SSD: 50G, half sine, 11ms

Physical

Construction	Extruded Aluminum with Heavy Duty Metal
Dimension	RCO-6000-ADL : 240 (W) x 261 (D) x 79 (H) mm RCO-6000-ADL-2E16, RCO-6000-ADL-2E16-4B7M, RCO-6000-ADL-2E16-2PWR : 240 (W) x 261 (D) x 126.8 (H) mm RCO-6000-ADL-4NS / RCO-6000-ADL-4NH / RCO-6000-ADL-8NS : 240 (W) x 261 (D) x 166.9 (H) mm
Weight	RCO-6000-ADL : 4.5 kg RCO-6000-ADL-2E16 : 6.5 ~ 7.5 kg RCO-6000-ADL-2E16-2PWR : 6.5 ~ 7.5 kg RCO-6000-ADL-2E16-4B7M : 6.5 ~ 7.5 kg RCO-6000-ADL-4NH : 10.5 ~ 11.5 kg RCO-6000-ADL-4NS : 10 ~ 11 kg RCO-6000-ADL-8NS : 10.5 ~ 11.5 kg
Mounting	Wall Mounting

* For 12/13th Gen Intel CPUs configured to run at 65W, operating temperatures will be limited to 60°C.

** 65W CPUs may experience thermal throttling depending on extreme application workloads; this is also due to an increase in the physical CPU cores from the Intel silicon (up to 24 cores). Please note, this does not indicate system malfunction or problems in the fanless design. Please consult our embedded engineers for the best configuration to match your application requirements.

*** All specifications and photos are subject to change without notice.

1.3 System I/O

1.3.1 RCO-6000-ADL

Front Panel

ATX power on/off switch

Press to power-on or power-off the system

Power LED

Indicates the power status of the system

HDD LED

Indicates the status of the hard drive

Antenna hole

Used to connect an antenna for optional Mini-PCIe WiFi module

USB 3.2 Gen 2 port (10 Gbps)

Used to connect USB 3.2 device

Removable HDD

Removable 2.5" SATA HDD Bay
(support H=7mm, hot-swappable)
Support RAID 0, 1

AT/ATX mode select switch

Used to select AT or ATX power mode

Clear CMOS

Used to clear CMOS

SIM card

Used to insert SIM card

Line-out

Used to connect a speaker

Mic-in


Used to connect a microphone

Remote Power on/off Terminal Block

Used to plug a remote power on/off terminal block

PC/Car mode select switch

Used to select PC or Car mode

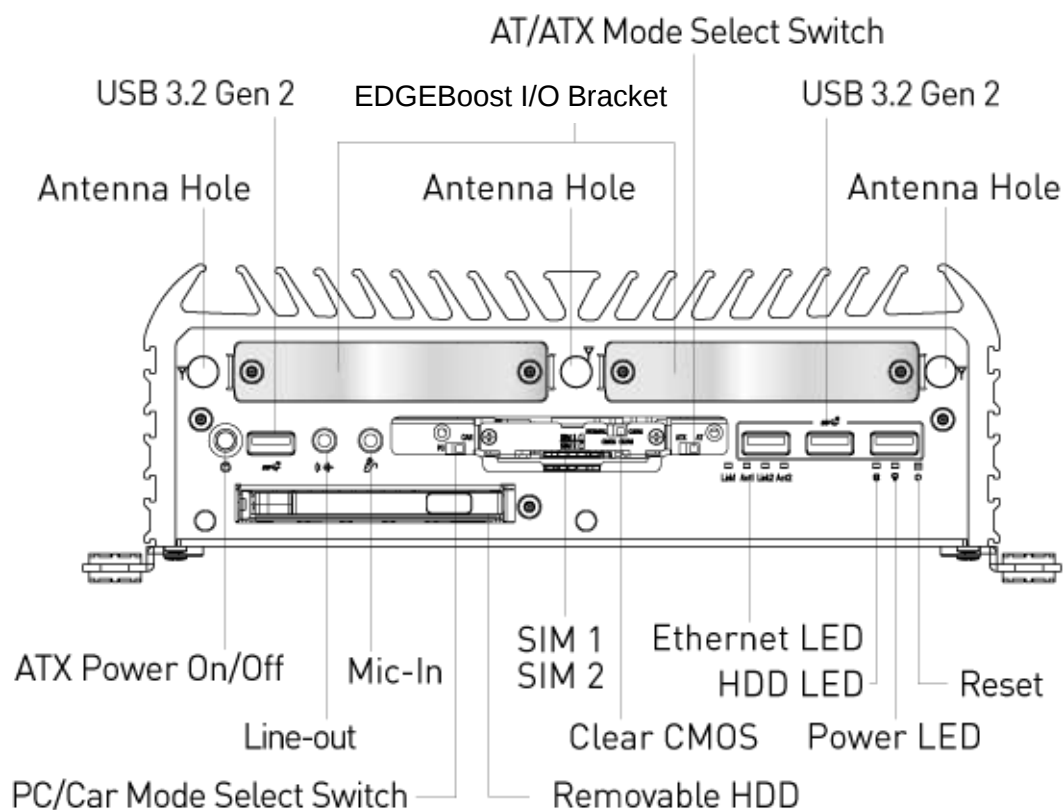EDGEBoost I/O bracket (optional)


RCO-6000-ADL

Rear Panel

DVI-I port

Used to connect a DVI monitor or connect optional split cable for dual display mode

Digital I/O Terminal Block

The Digital I/O terminal block supports 8 digital input and 8 digital output

DisplayPort

Used to connect a DisplayPort monitor

COM port

COM1 ~ COM2 support RS232/422/485 serial device

USB 3.2 Gen 2 port (10 Gbps)

Used to connect USB 3.2 device

LAN port


Used to connect the system to a local area network

Antenna hole

Used to connect an antenna for optional Mini-PCIe WiFi module

DC IN

Used to plug a DC power input with terminal block

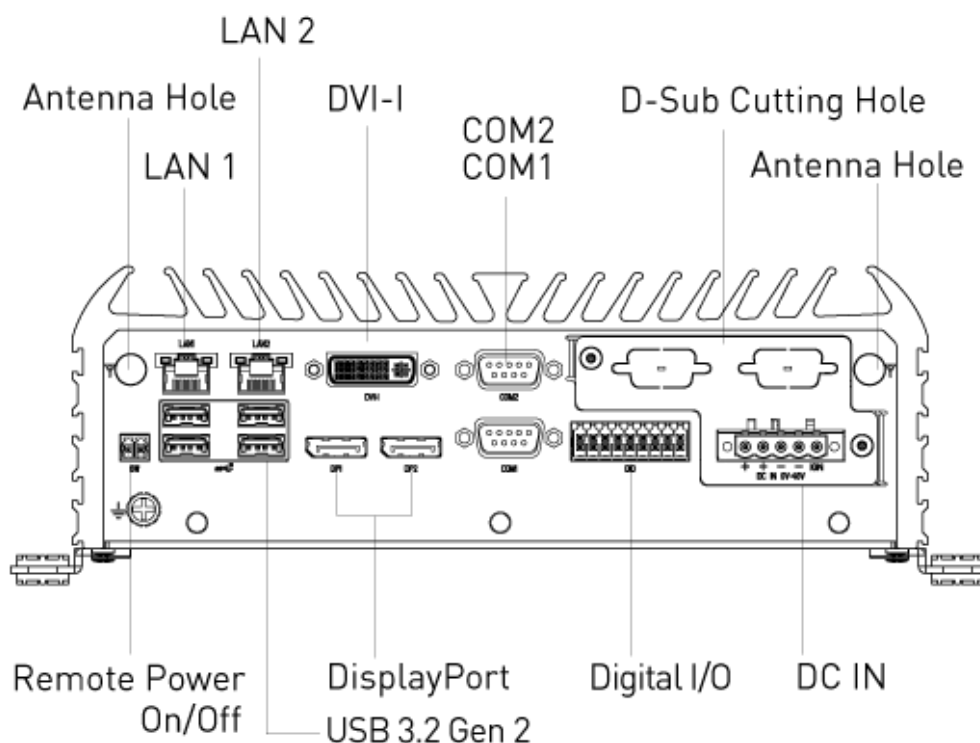

1.3.2 RCO-6000-ADL-2E16

Front Panel

Top Module (Industrial Fanless PC on Top)

ATX power on/off switch

Press to power-on or power-off the system

Power LED

Indicates the power status of the system

HDD LED

Indicates the status of the hard drive

Antenna hole

Used to connect an antenna for optional Mini-PCIe WiFi module

USB 3.2 Gen 2 port (10 Gbps)

Used to connect USB 3.2 device

Removable HDD

Removable 2.5" SATA HDD Bay
(support H=7mm, hot-swappable)
Support RAID 0, 1

AT/ATX mode select switch

Used to select AT or ATX power mode

Clear CMOS

Used to clear CMOS

SIM card

Used to insert SIM card

Line-out

Used to connect a speaker

Mic-in


Used to connect a microphone

Remote Power on/off Terminal Block

Used to plug a remote power on/off terminal block

PC/Car mode select switch

Used to select PC or Car mode

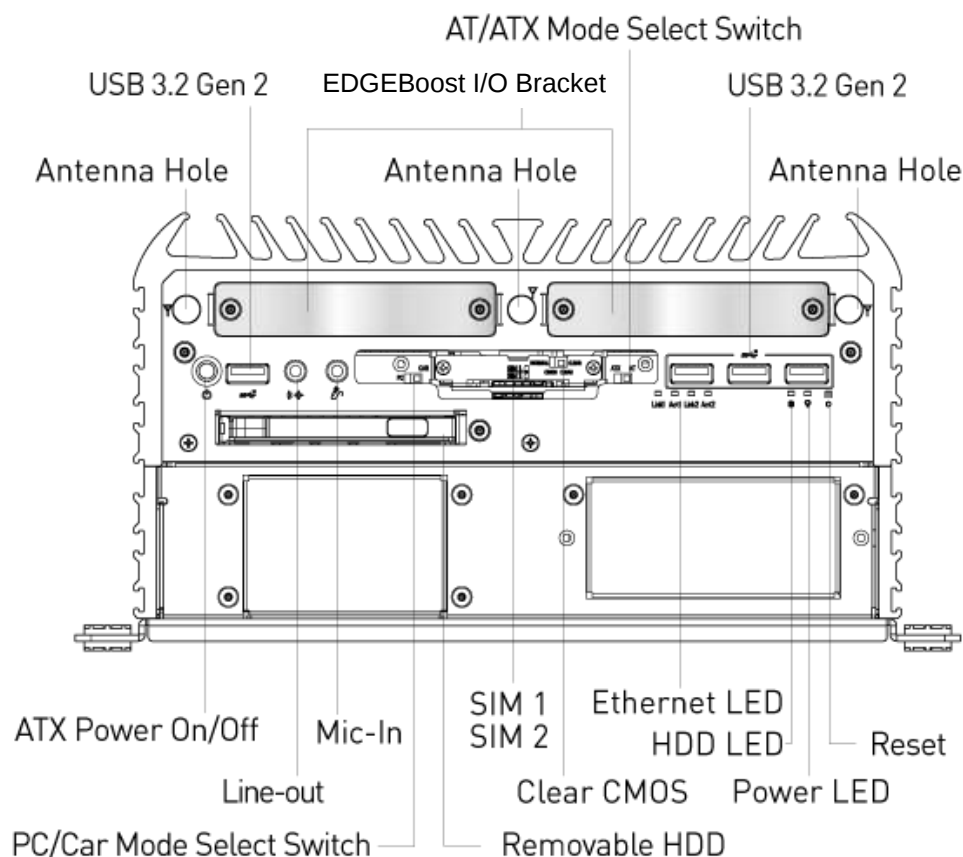EDGEBoost I/O bracket (optional)


RCO-6000-ADL-2E16

Rear Panel

Top Module (Industrial Fanless PC on Top)

DVI-I port

Used to connect a DVI monitor or connect optional split cable for dual display mode

Digital I/O Terminal Block

The Digital I/O terminal block supports 8 digital input and 8 digital output

DisplayPort

Used to connect a DisplayPort monitor

COM port

COM1 ~ COM2 support RS232/422/485 serial device

USB 3.2 Gen 2 port (10 Gbps)

Used to connect USB 3.2 device

LAN port

Used to connect the system to a local area network

Antenna hole

Used to connect an antenna for optional Mini-PCIe WiFi module


DC IN (5-pin Terminal Block)

Used to plug a DC power input with terminal block

Bottom Module (Flexible and Dedicated "EDGEBoost Nodes" on Bottom)

Expansion

PCIe Slot

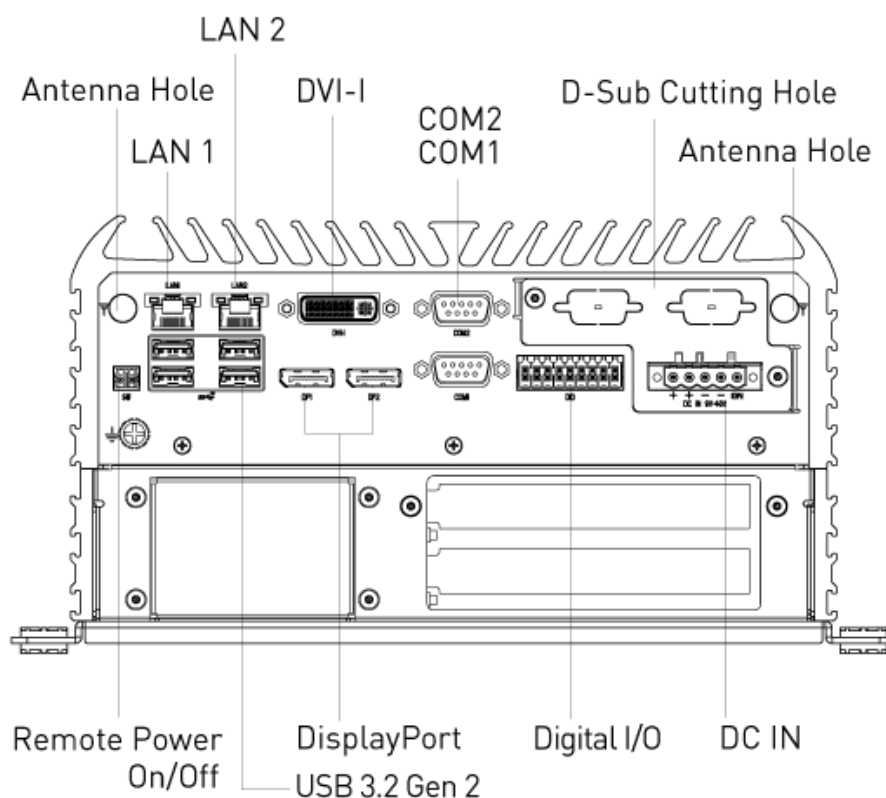

1.3.3 RCO-6000-ADL-2E16-4B7M

Front Panel

Top Module (Industrial Fanless PC on Top)

ATX power on/off switch

Press to power-on or power-off the system

Power LED

Indicates the power status of the system

HDD LED

Indicates the status of the hard drive

Antenna hole

Used to connect an antenna for optional Mini-PCIe WiFi module

USB 3.2 Gen 2 port (10 Gbps)

Used to connect USB 3.2 device

Removable HDD

Removable 2.5" SATA HDD Bay
(support H=7mm, hot-swappable)
Support RAID 0, 1

AT/ATX mode select switch

Used to select AT or ATX power mode

Clear CMOS

Used to clear CMOS

SIM card

Used to insert SIM card

Line-out

Used to connect a speaker

Mic-in

Used to connect a microphone

Remote Power on/off Terminal Block

Used to plug a remote power on/off terminal block

PC/Car mode select switch


Used to select PC or Car mode

EDGEBoost I/O bracket (optional)

Bottom Module (Flexible and Dedicated "EDGEBoost Nodes" on Bottom)

SSD/HDD

4x 7mm Hot-swappable 2.5" SATA HDD/SSD Bay

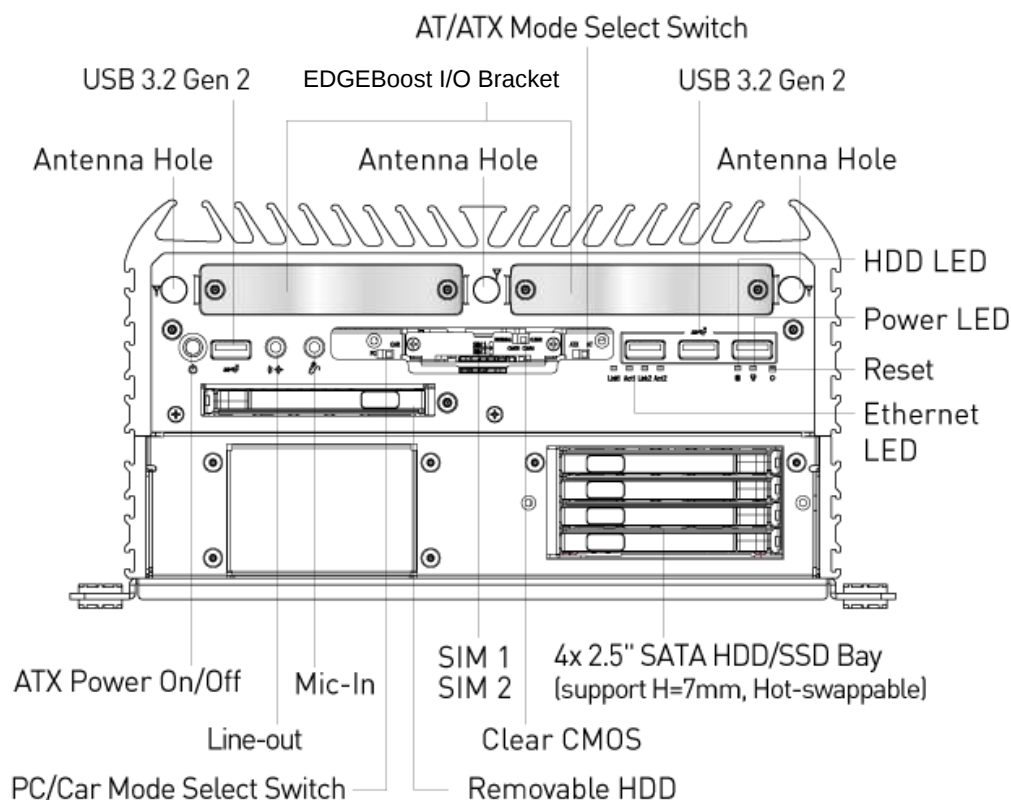

RCO-6000-ADL-2E16-4B7M

Rear Panel

Top Module (Industrial Fanless PC on Top)

DVI-I port

Used to connect a DVI monitor or connect optional split cable for dual display mode

Digital I/O Terminal Block

The Digital I/O terminal block supports 8 digital input and 8 digital output

DisplayPort

Used to connect a DisplayPort monitor

COM port

COM1 ~ COM2 support RS232/422/485 serial device

USB 3.2 Gen 2 port (10 Gbps)

Used to connect USB 3.2 device

LAN port

Used to connect the system to a local area network

Antenna hole

Used to connect an antenna for optional Mini-PCIe WiFi module

DC IN (5-pin Terminal Block)

Used to plug a DC power input with terminal block


Bottom Module (Flexible and Dedicated "EDGEBoost Nodes" on Bottom)

Fan

Hot-Swappable Rear-Fan Exhaust design for easy maintenance

Expansion

PCIe Slot

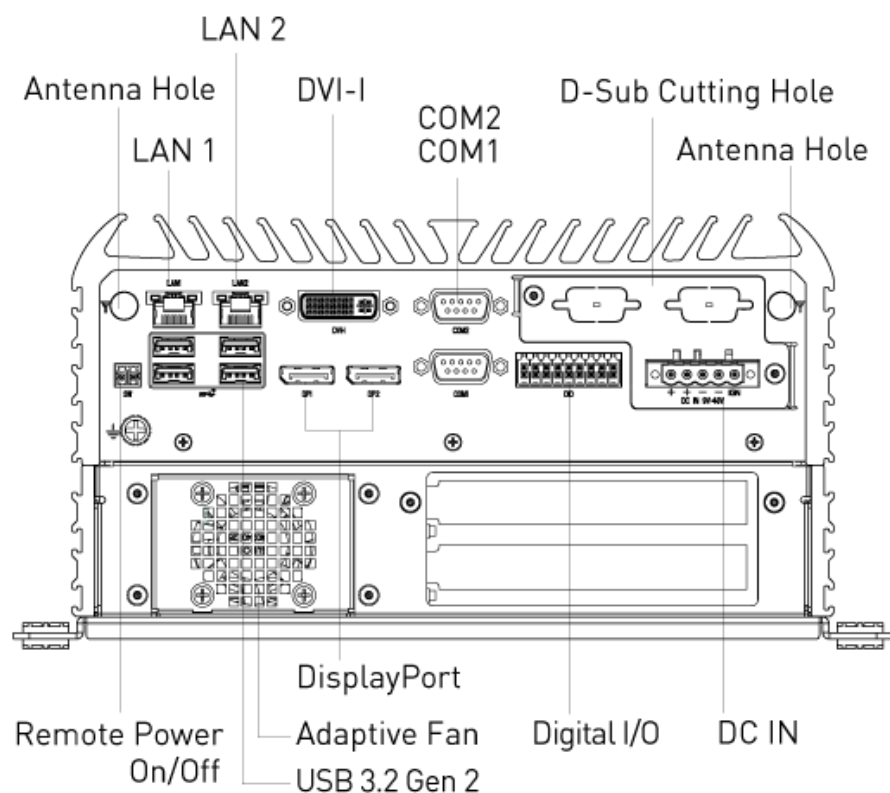

1.3.4 RCO-6000-ADL-2E16-2B15M / RCO-6000-ADL-2E16-2N15M

Front Panel

Top Module (Industrial Fanless PC on Top)

ATX power on/off switch

Press to power-on or power-off the system

Power LED

Indicates the power status of the system

HDD LED

Indicates the status of the hard drive

Antenna hole

Used to connect an antenna for optional Mini-PCIe WiFi module

USB 3.2 Gen 2 port (10 Gbps)

Used to connect USB 3.2 device

Removable HDD

Removable 2.5" SATA HDD Bay
(support H=7mm, hot-swappable)
Support RAID 0, 1

AT/ATX mode select switch

Used to select AT or ATX power mode

Clear CMOS

Used to clear CMOS

SIM card

Used to insert SIM card

Line-out

Used to connect a speaker

Mic-in

Used to connect a microphone

Remote Power on/off Terminal Block

Used to plug a remote power on/off terminal block

PC/Car mode select switch

Used to select PC or Car mode

EDGEBoost I/O bracket (optional)


Bottom Module (Flexible and Dedicated "EDGEBoost Nodes" on Bottom)

RCO-6000-ADL-2E16-2B15M :

2x 15mm Hot-swappable 2.5" SATA HDD/SSD Bay

RCO-6000-ADL-2E16-2N15M :

2x 15mm Hot-swappable 2.5" U.2 NVMe Bay

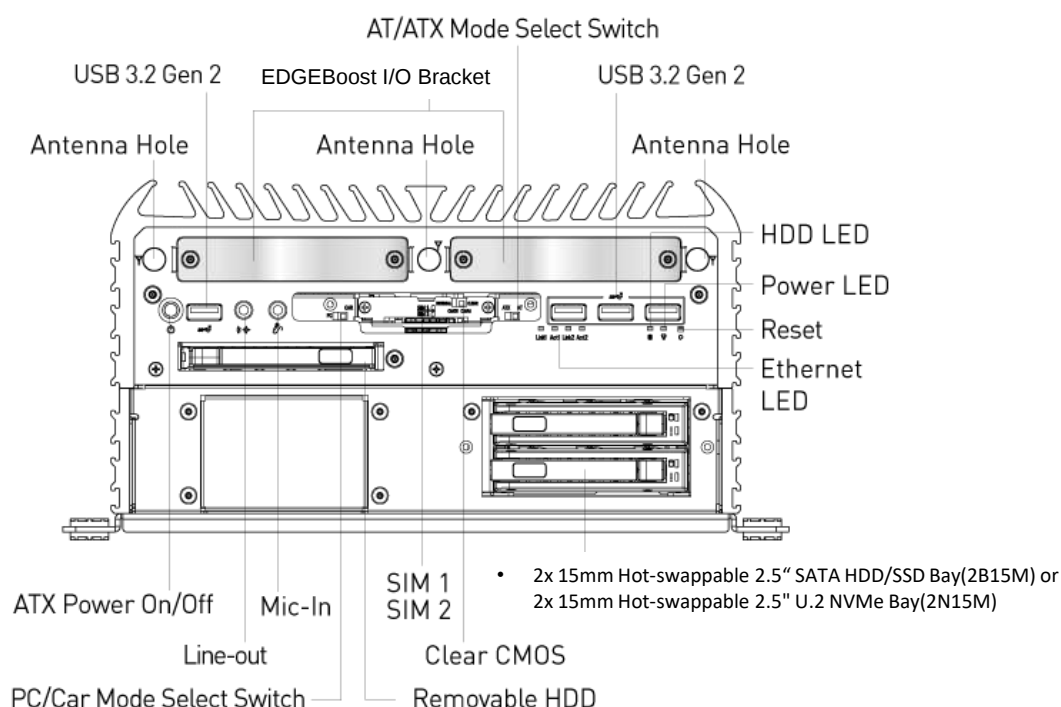

RCO-6000-ADL-2E16-2B15M / RCO-6000-ADL-2E16-2N15M

Rear Panel

Top Module (Industrial Fanless PC on Top)

DVI-I port

Used to connect a DVI monitor or connect optional split cable for dual display mode

Digital I/O Terminal Block

The Digital I/O terminal block supports 8 digital input and 8 digital output

DisplayPort

Used to connect a DisplayPort monitor

COM port

COM1 ~ COM2 support RS232/422/485 serial device

USB 3.2 Gen 2 port (10 Gbps)

Used to connect USB 3.2 device

LAN port

Used to connect the system to a local area network

Antenna hole

Used to connect an antenna for optional Mini-PCIe WiFi module

DC IN (5-pin Terminal Block)

Used to plug a DC power input with terminal block


Bottom Module (Flexible and Dedicated "EDGEBoost Nodes" on Bottom)

Fan

Hot-Swappable Rear-Fan Exhaust design for easy maintenance

Expansion

PCIe Slot

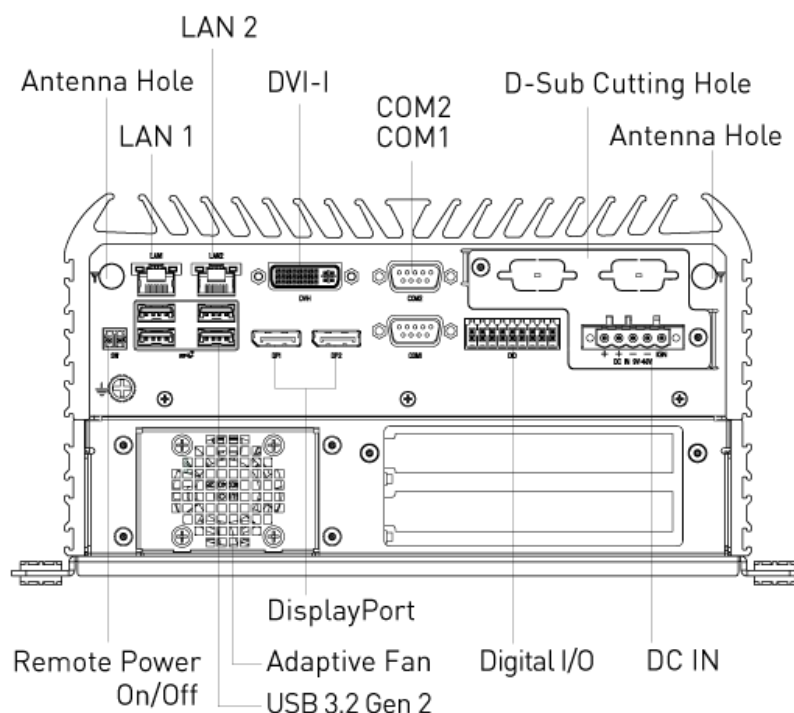

1.3.5 RCO-6000-ADL-2E16-2PWR

Front Panel

Top Module (Industrial Fanless PC on Top)

ATX power on/off switch

Press to power-on or power-off the system

Power LED

Indicates the power status of the system

HDD LED

Indicates the status of the hard drive

Antenna hole

Used to connect an antenna for optional Mini-PCIe WiFi module

USB 3.2 Gen 2 port (10 Gbps)

Used to connect USB 3.2 device

Removable HDD

Removable 2.5" SATA HDD Bay
(support H=7mm, hot-swappable)
Support RAID 0, 1

AT/ATX mode select switch

Used to select AT or ATX power mode

Clear CMOS

Used to clear CMOS

SIM card

Used to insert SIM card

Line-out

Used to connect a speaker

Mic-in

Used to connect a microphone

Remote Power on/off Terminal Block

Used to plug a remote power on/off terminal block

PC/Car mode select switch


Used to select PC or Car mode

EDGEBoost I/O bracket (optional)

Bottom Module (Flexible and Dedicated "EDGEBoost Nodes" on Bottom)

Fan

Hot-Swappable Rear-Fan Exhaust design for easy maintenance

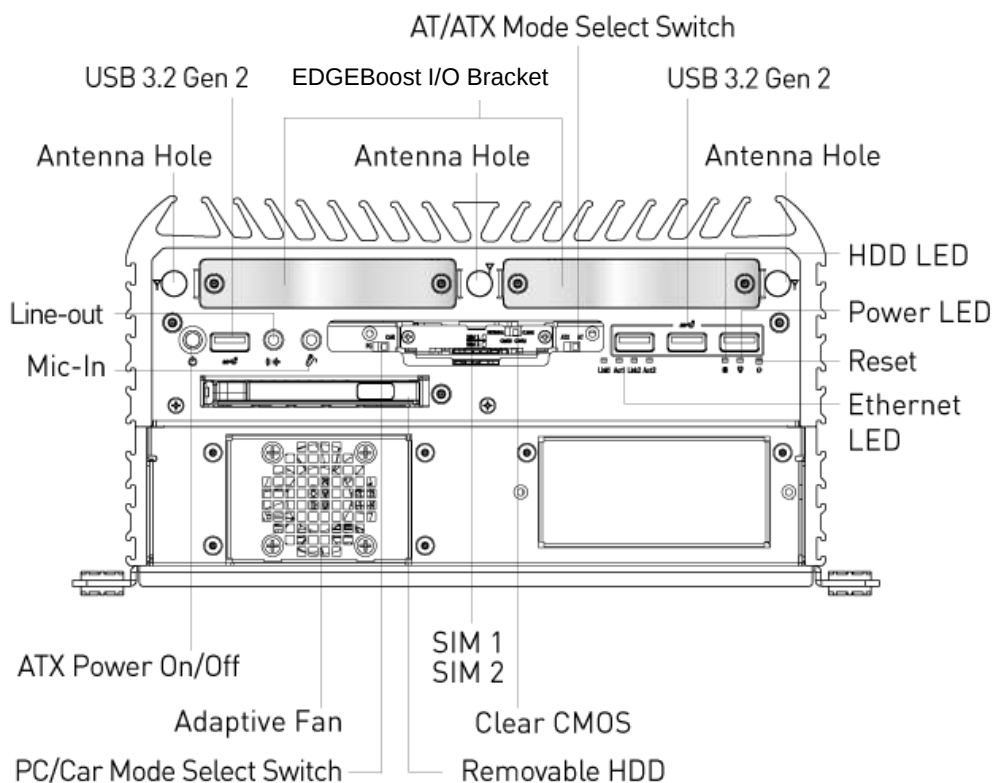

RCO-6000-ADL-2E16-2PWR

Rear Panel

Top Module (Industrial Fanless PC on Top)

DVI-I port

Used to connect a DVI monitor or connect optional split cable for dual display mode

Digital I/O Terminal Block

The Digital I/O terminal block supports 8 digital input and 8 digital output

DisplayPort

Used to connect a DisplayPort monitor

COM port

COM1 ~ COM2 support RS232/422/485 serial device

USB 3.2 Gen 2 port (10 Gbps)

Used to connect USB 3.2 device

LAN port

Used to connect the system to a local area network

Antenna hole

Used to connect an antenna for optional Mini-PCIe WiFi module

DC IN (5-pin Terminal Block)

Used to plug a DC power input with terminal block


Bottom Module (Flexible and Dedicated "EDGEBoost Nodes" on Bottom)

DC IN

12~48VDC for GPU/Card Expansion

Expansion

PCIe Slot

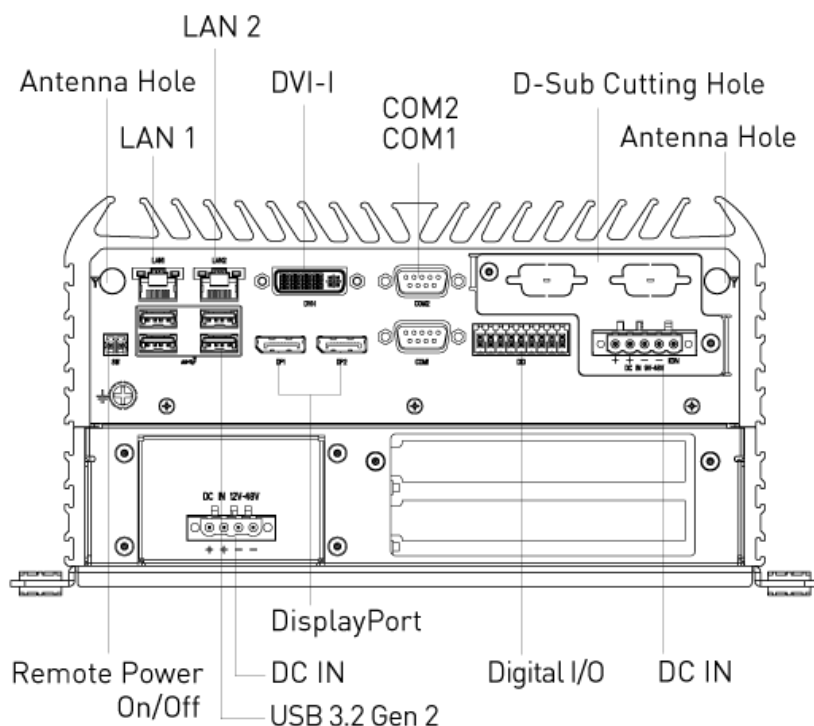

1.3.6 RCO-6000-ADL-4NH

Top Module (Industrial Fanless PC on Top)

ATX power on/off switch

Press to power-on or power-off the system

Power LED

Indicates the power status of the system

HDD LED

Indicates the status of the hard drive

Antenna hole

Used to connect an antenna for optional Mini-PCIe WiFi module

USB 3.2 Gen 2 port (10 Gbps)

Used to connect USB 3.2 device

Removable HDD

Removable 2.5" SATA HDD Bay
(support H=7mm, hot-swappable)
Support RAID 0, 1

AT/ATX mode select switch

Used to select AT or ATX power mode

Clear CMOS

Used to clear CMOS

SIM card

Used to insert SIM card

Line-out

Used to connect a speaker

Mic-in

Used to connect a microphone

Remote Power on/off Terminal Block

Used to plug a remote power on/off terminal block

PC/Car mode select switch

Used to select PC or Car mode

EDGEBoost I/O bracket (optional)

Front Panel

Bottom Module (Flexible and Dedicated "EDGEBoost Nodes" on Bottom)

- **Data Cartridge A**

Hot swappable NVMe SSD Cannister Bricks,
1x Removable 2 Bay NVMe SSD Module with Hardware
RAID 0, 1, 5, 6, 10 support (Support H=15mm)

- **Lock**


Used to key switch

- **Data Cartridge B**

Hot swappable NVMe SSD Cannister Bricks),
1x Removable 2 Bay NVMe SSD Module with Hardware
RAID 0, 1, 5, 6, 10 support (Support H=15mm)

- **Storage Ejection Button**

Safety Storage Ejection Button to suspend all I/O
operation, read-write to prevent loss or corruption of
data

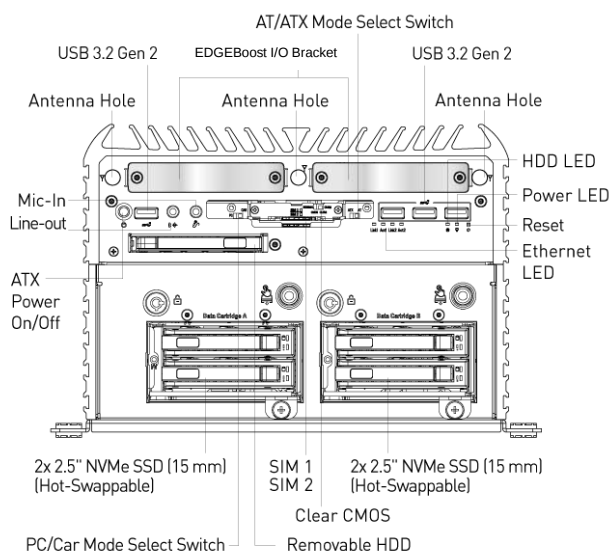

RCO-6000-ADL-4NH

Rear Panel

Top Module (Industrial Fanless PC on Top)

DVI-I port

Used to connect a DVI monitor or connect optional split cable for dual display mode

Digital I/O Terminal Block

The Digital I/O terminal block supports 8 digital input and 8 digital output

DisplayPort

Used to connect a DisplayPort monitor

COM port

COM1 ~ COM2 support RS232/422/485 serial device

USB 3.2 Gen 2 port (10 Gbps)

Used to connect USB 3.2 device

LAN port

Used to connect the system to a local area network

Antenna hole

Used to connect an antenna for optional Mini-PCIe WiFi module

DC IN (5-pin Terminal Block)

Used to plug a DC power input with terminal block


Bottom Module (Flexible and Dedicated "EDGEBoost Nodes" on Bottom)

- **DC IN (4-pin Terminal Block)**

Used to plug a DC power input with terminal block

- **Fan**

Hot-Swappable Rear-Fan Exhaust design for easy maintenance

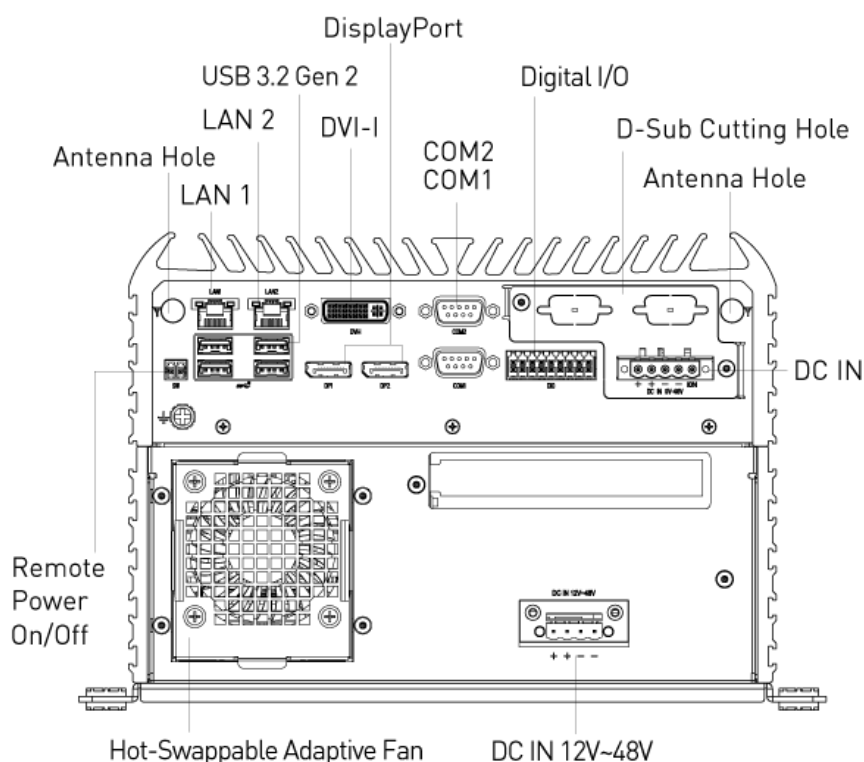

1.3.7 RCO-6000-ADL-4NS

Top Module (Industrial Fanless PC on Top)

Front Panel

ATX power on/off switch

Press to power-on or power-off the system

Power LED

Indicates the power status of the system

HDD LED

Indicates the status of the hard drive

Antenna hole

Used to connect an antenna for optional Mini-PCIe WiFi module

USB 3.2 Gen 2 port (10 Gbps)

Used to connect USB 3.2 device

Removable HDD

Removable 2.5" SATA HDD Bay
(support H=7mm, hot-swappable)
Support RAID 0, 1

AT/ATX mode select switch

Used to select AT or ATX power mode

Clear CMOS

Used to clear CMOS

SIM card

Used to insert SIM card

Line-out

Used to connect a speaker

Mic-in

Used to connect a microphone

Remote Power on/off Terminal Block

Used to plug a remote power on/off terminal block

PC/Car mode select switch

Used to select PC or Car mode

EDGEBoost I/O bracket (optional)

Bottom Module (Flexible and Dedicated "EDGEBoost Nodes" on Bottom)

- **Data Cartridge A**

Hot swappable NVMe SSD Cannister Bricks,
1x Removable 2 Bay NVMe SSD Module with Software
RAID 0, 1, 5, 10 support (Support H=15mm)

- **Lock**


Used to key switch

- **Data Cartridge B**

Hot swappable NVMe SSD Cannister Bricks),
1x Removable 2 Bay NVMe SSD Module with Software
RAID 0, 1, 5, 10 support (Support H=15mm)

- **Storage Ejection Button**

Safety Storage Ejection Button to suspend all I/O
operation, read-write to prevent loss or corruption of
data

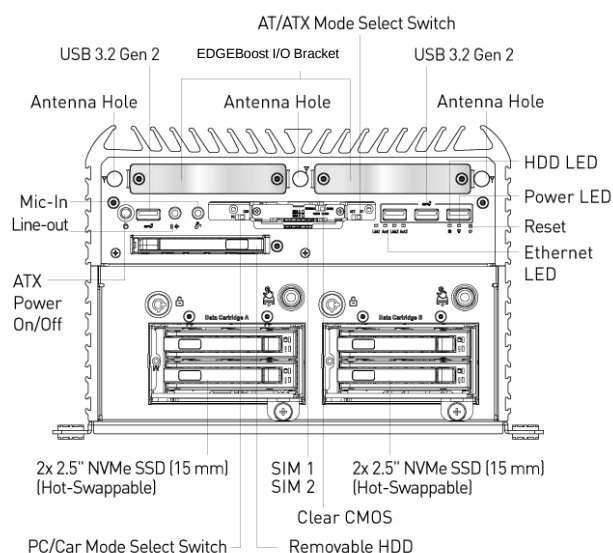

RCO-6000-ADL-4NS

Rear Panel

Top Module (Industrial Fanless PC on Top)

DVI-I port

Used to connect a DVI monitor or connect optional split cable for dual display mode

Digital I/O Terminal Block

The Digital I/O terminal block supports 8 digital input and 8 digital output

DisplayPort

Used to connect a DisplayPort monitor

COM port

COM1 ~ COM2 support RS232/422/485 serial device

USB 3.2 Gen 2 port (10 Gbps)

Used to connect USB 3.2 device

LAN port

Used to connect the system to a local area network

Antenna hole

Used to connect an antenna for optional Mini-PCIe WiFi module

DC IN (5-pin Terminal Block)

Used to plug a DC power input with terminal block


Bottom Module (Flexible and Dedicated "EDGEBoost Nodes" on Bottom)

- **DC IN (4-pin Terminal Block)**

Used to plug a DC power input with terminal block

- **Fan**

Hot-Swappable Rear-Fan Exhaust design for easy maintenance

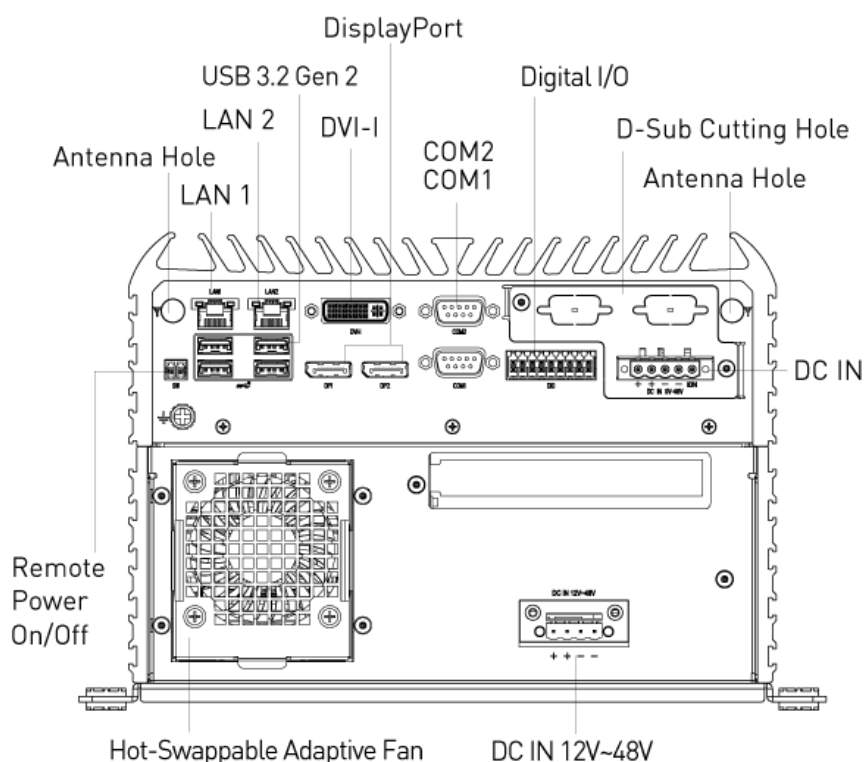

1.3.8 RCO-6000-ADL-8NS

Top Module (Industrial Fanless PC on Top)

ATX power on/off switch

Press to power-on or power-off the system

Power LED

Indicates the power status of the system

HDD LED

Indicates the status of the hard drive

Antenna hole

Used to connect an antenna for optional Mini-PCIe WiFi module

USB 3.2 Gen 2 port (10 Gbps)

Used to connect USB 3.2 device

Removable HDD

Removable 2.5" SATA HDD Bay
(support H=7mm, hot-swappable)
Support RAID 0, 1

AT/ATX mode select switch

Used to select AT or ATX power mode

Clear CMOS

Used to clear CMOS

SIM card

Used to insert SIM card

Line-out

Used to connect a speaker

Mic-in

Used to connect a microphone

Remote Power on/off Terminal Block

Used to plug a remote power on/off terminal block

PC/Car mode select switch

Used to select PC or Car mode

EDGEBoost I/O bracket (optional)

Front Panel

Bottom Module (Flexible and Dedicated "EDGEBoost Nodes" on Bottom)

- **Data Cartridge A**

Hot swappable NVMe SSD Cannister Bricks,
1x Removable 4 Bay NVMe SSD Module with RAID
0, 1 support (Support H=7mm)

- **Lock**


Used to key switch

- **Data Cartridge B**

Hot swappable NVMe SSD Cannister Bricks),
1x Removable 4 Bay NVMe SSD Module with RAID
0, 1 support (Support H=7mm)

- **Storage Ejection Button**

Safety Storage Ejection Button to suspend all I/O
operation, read-write to prevent loss or
corruption of data

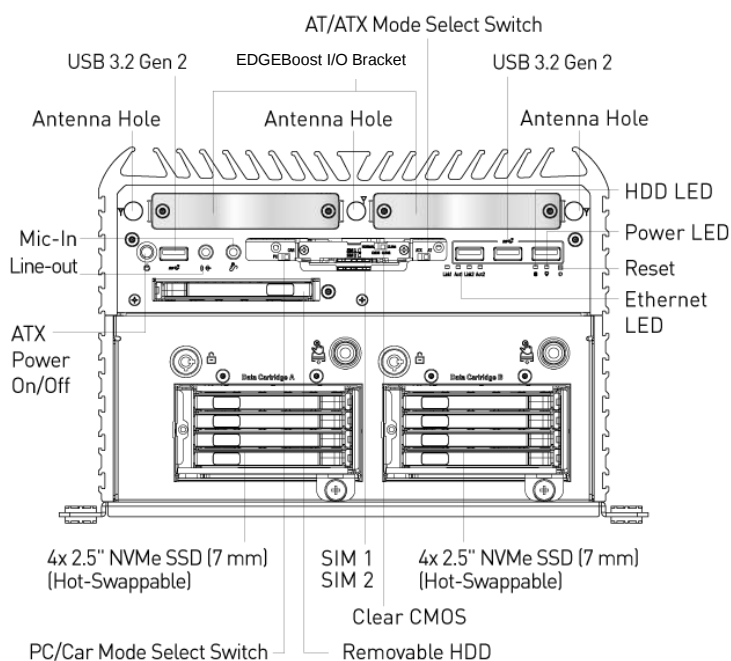

RCO-6000-ADL-8NS

Rear Panel

Top Module (Industrial Fanless PC on Top)

DVI-I port

Used to connect a DVI monitor or connect optional split cable for dual display mode

Digital I/O Terminal Block

The Digital I/O terminal block supports 8 digital input and 8 digital output

DisplayPort

Used to connect a DisplayPort monitor

COM port

COM1 ~ COM2 support RS232/422/485 serial device

USB 3.2 Gen 2 port (10 Gbps)

Used to connect USB 3.2 device

LAN port

Used to connect the system to a local area network

Antenna hole

Used to connect an antenna for optional Mini-PCIe WiFi module

DC IN (5-pin Terminal Block)

Used to plug a DC power input with terminal block


Bottom Module (Flexible and Dedicated "EDGEBoost Nodes" on Bottom)

- **DC IN (4-pin Terminal Block)**

Used to plug a DC power input with terminal block

- **Fan**


Hot-Swappable Rear-Fan Exhaust design for easy maintenance

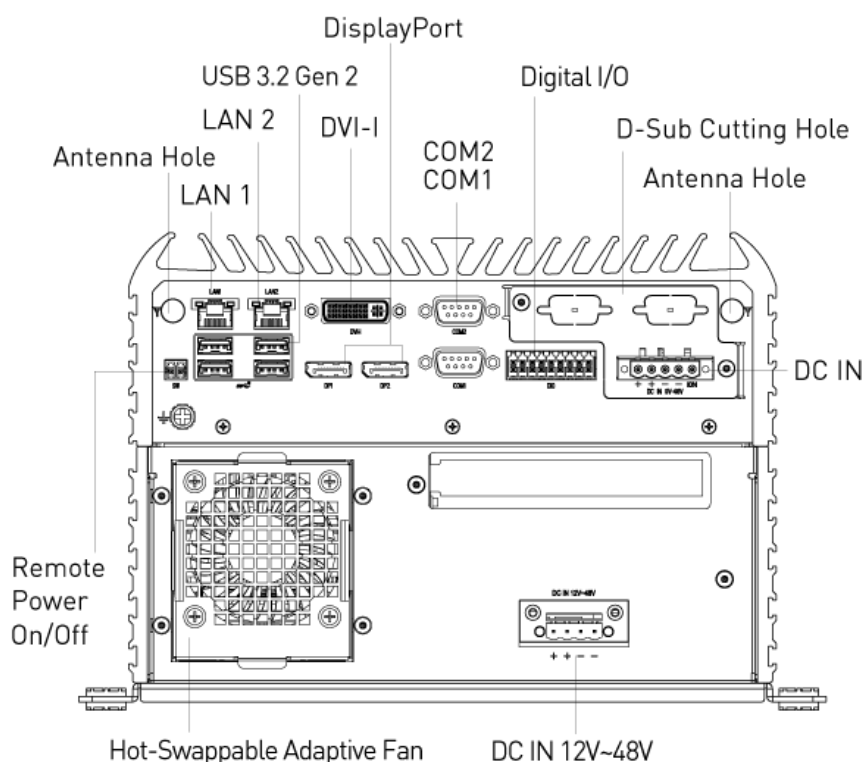


1.3.9 EDGEBoost I/O Bracket

Model No :


- RCO-6000-ADL
- RCO-6000-ADL-2E16
- RCO-6000-ADL-2E16-2PWR
- RCO-6000-ADL-2E16-4B7M
- RCO-6000-ADL-2E16-2B15M
- RCO-6000-ADL-2E16-2N15M
- RCO-6000-ADL-4NH
- RCO-6000-ADL-4NS
- RCO-6000-ADL-8NS

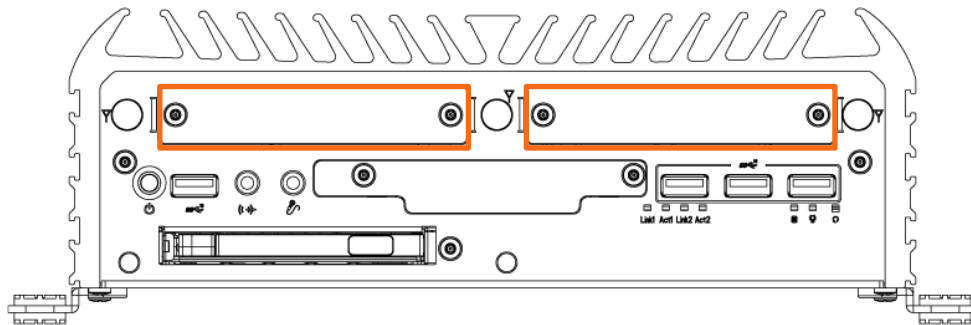


Available Module :



4x RJ45 LAN/PoE Ports




2x 5G SIM Slot

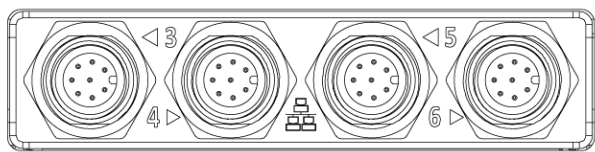

4x M12 LAN/PoE Ports




**2x M.2 B-Key (1x 5G SIM)
(Right Universal Slot Only)**



2x 10Gb Ports



1x M.2 M-Key (4-Lane)




4x USB 3.2 Gen 1 Ports

1.4 Mechanical Dimensions


1.4.1 RCO-6000-ADL

Unit: mm

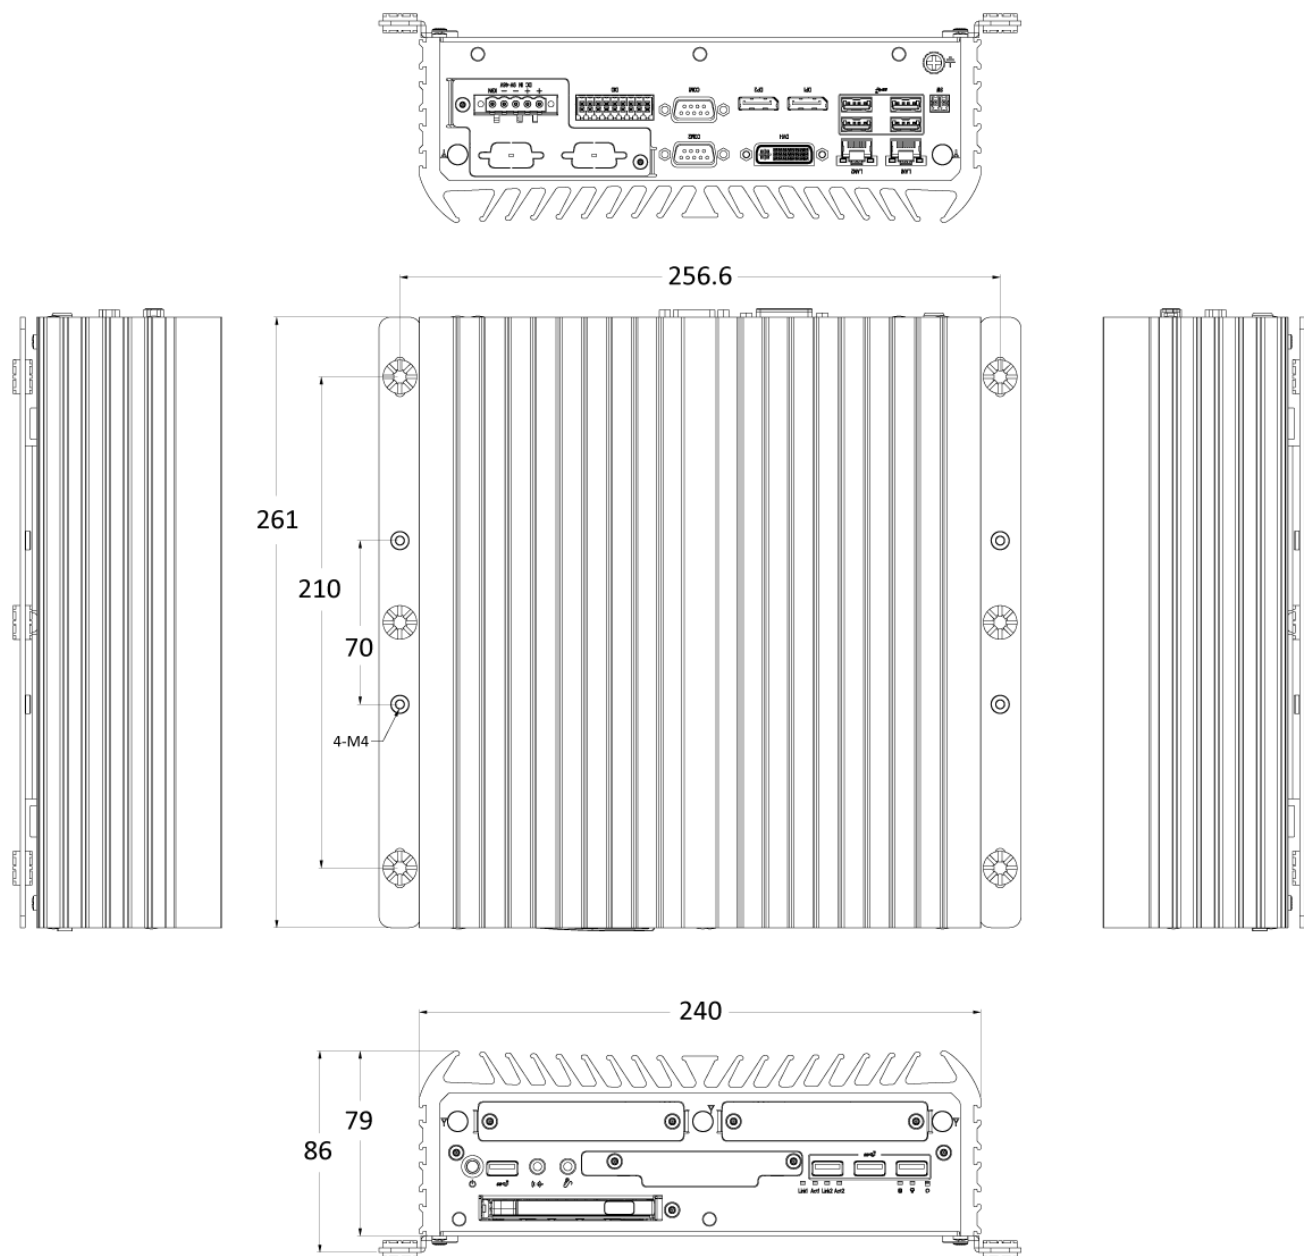


1.4.2 RCO-6000-ADL-2E16

Unit: mm

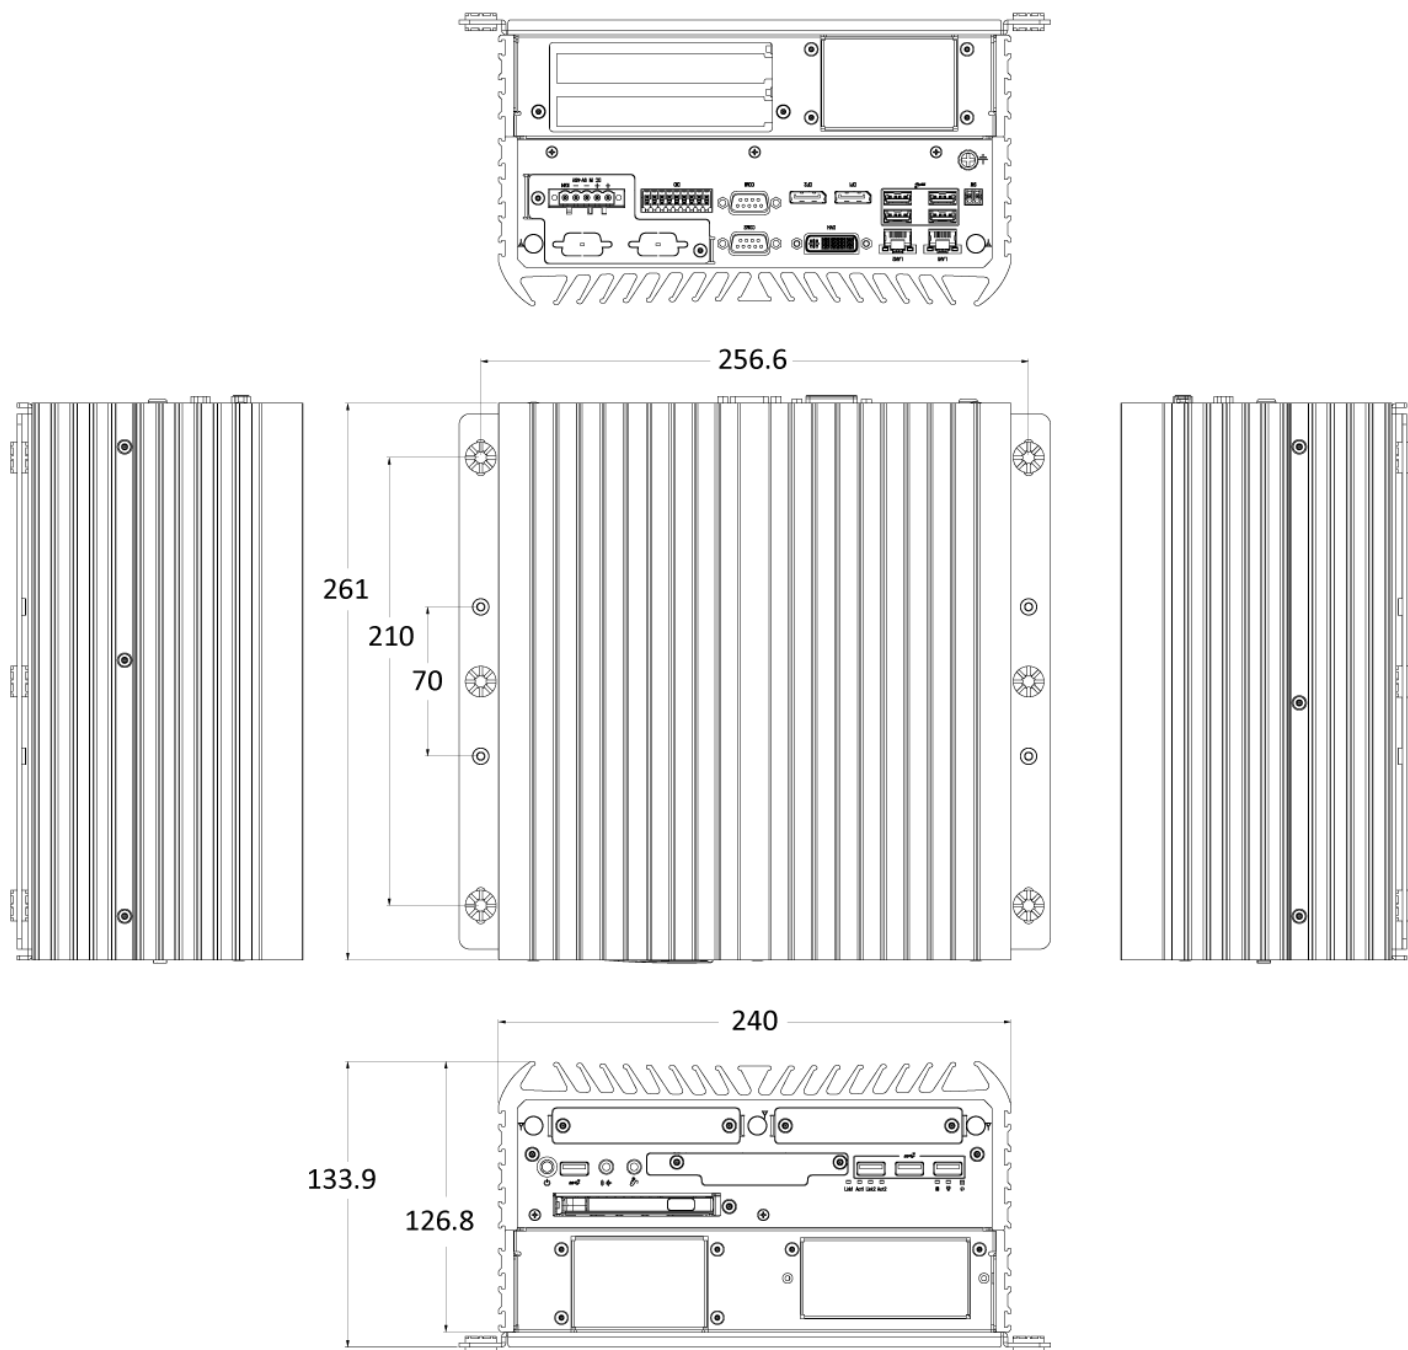


1.4.3 RCO-6000-ADL-2E16-4B7M

Unit: mm

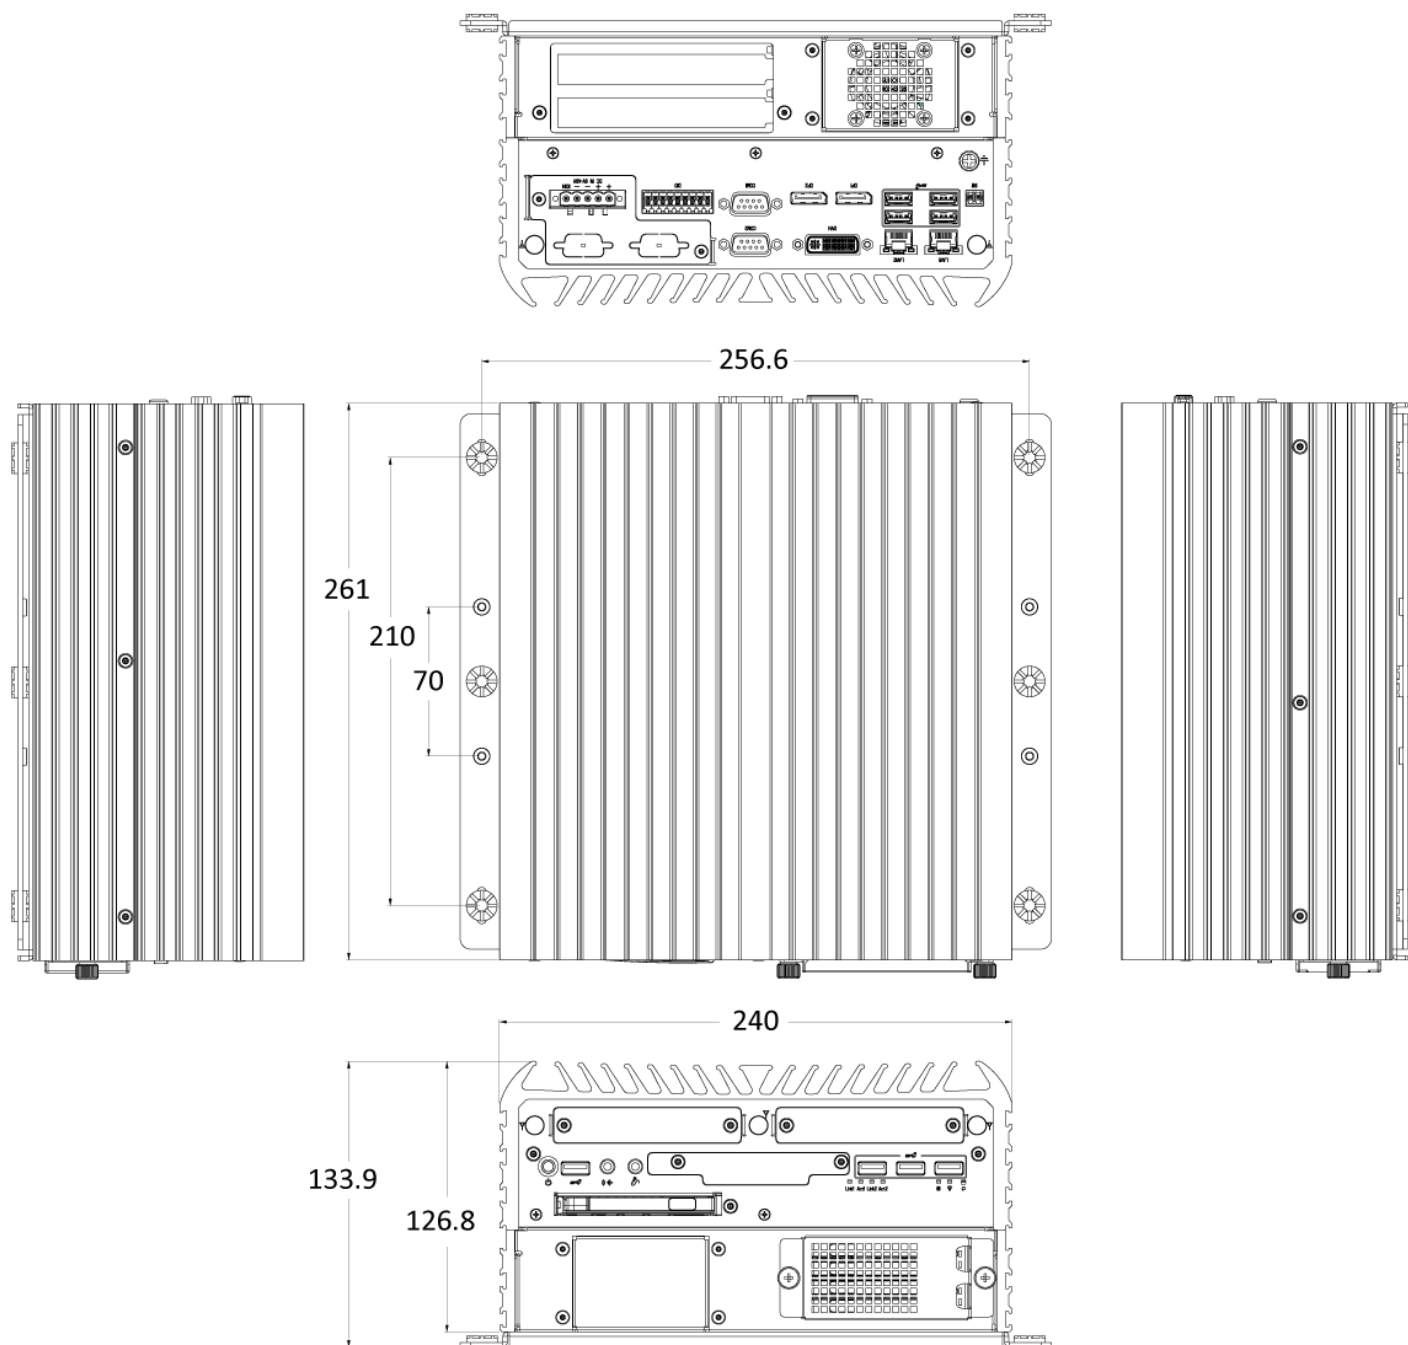


1.4.4 RCO-6000-ADL-2E16-2B15M / RCO-6000-ADL-2E16-2N15M

Unit: mm

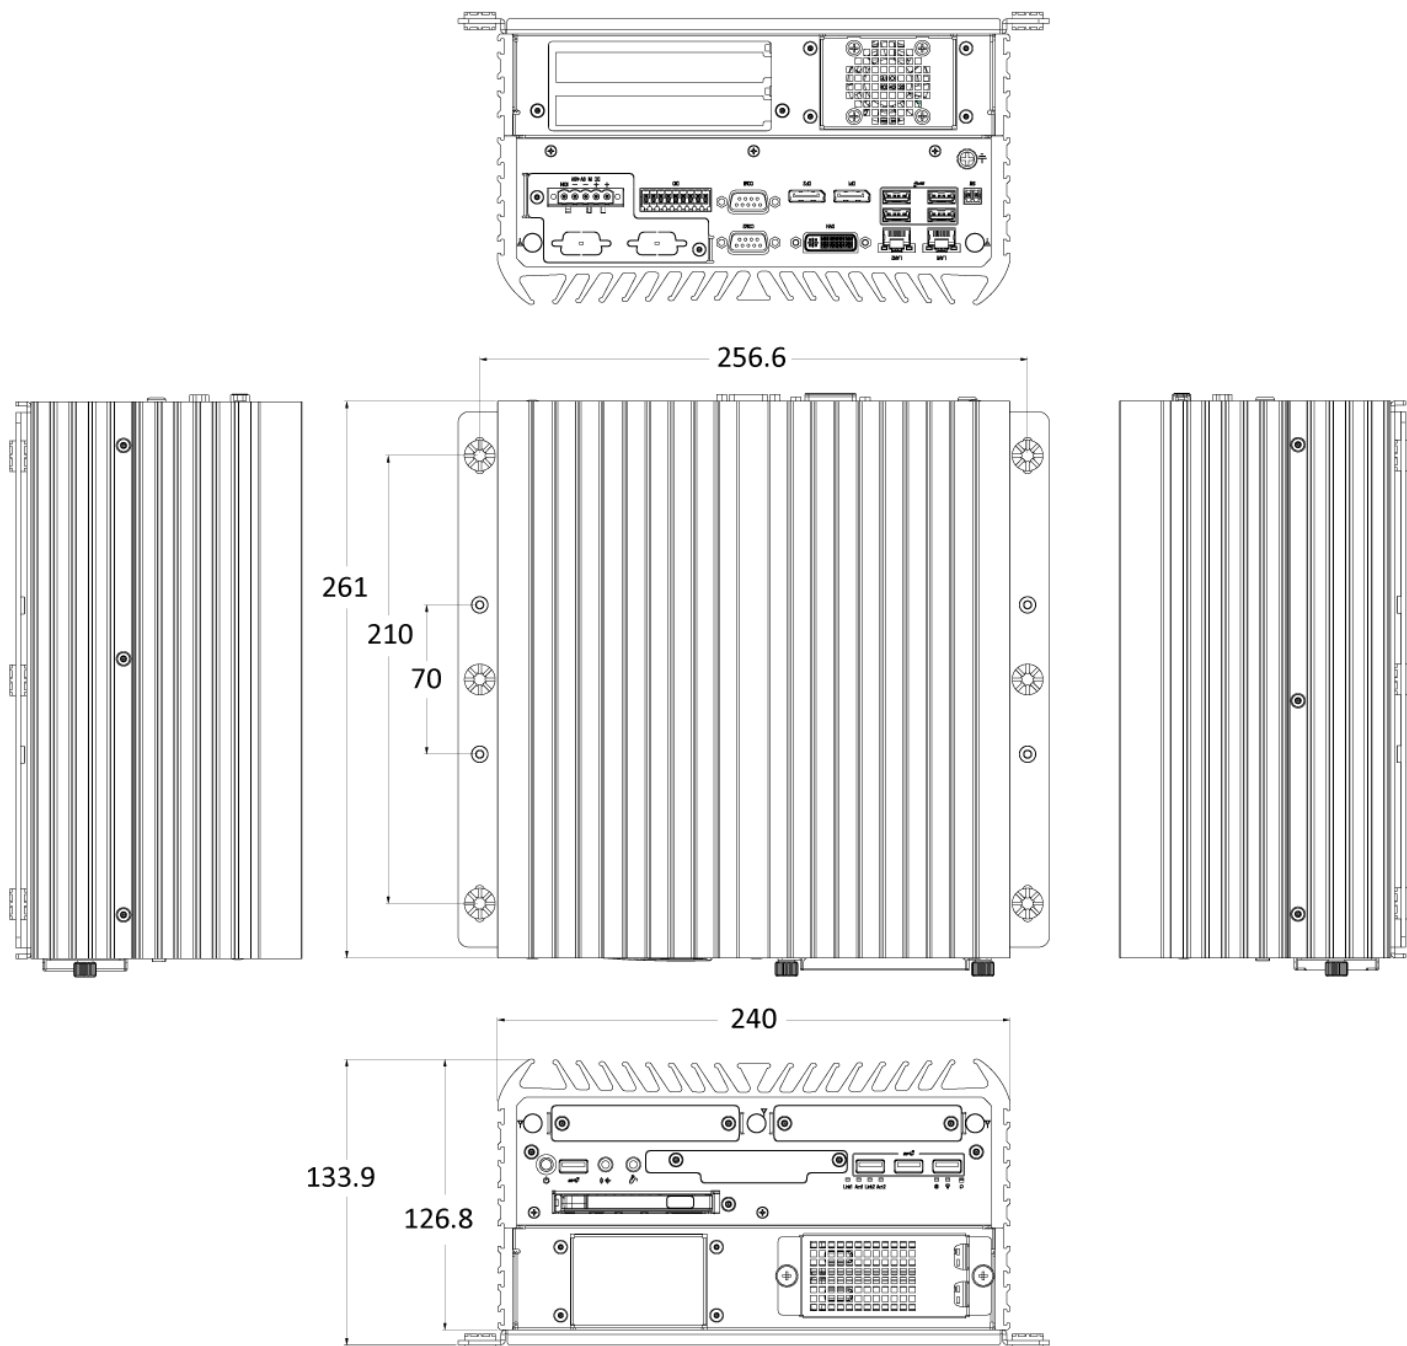



1.4.5 RCO-6000-ADL-2E16-2PWR

Unit: mm

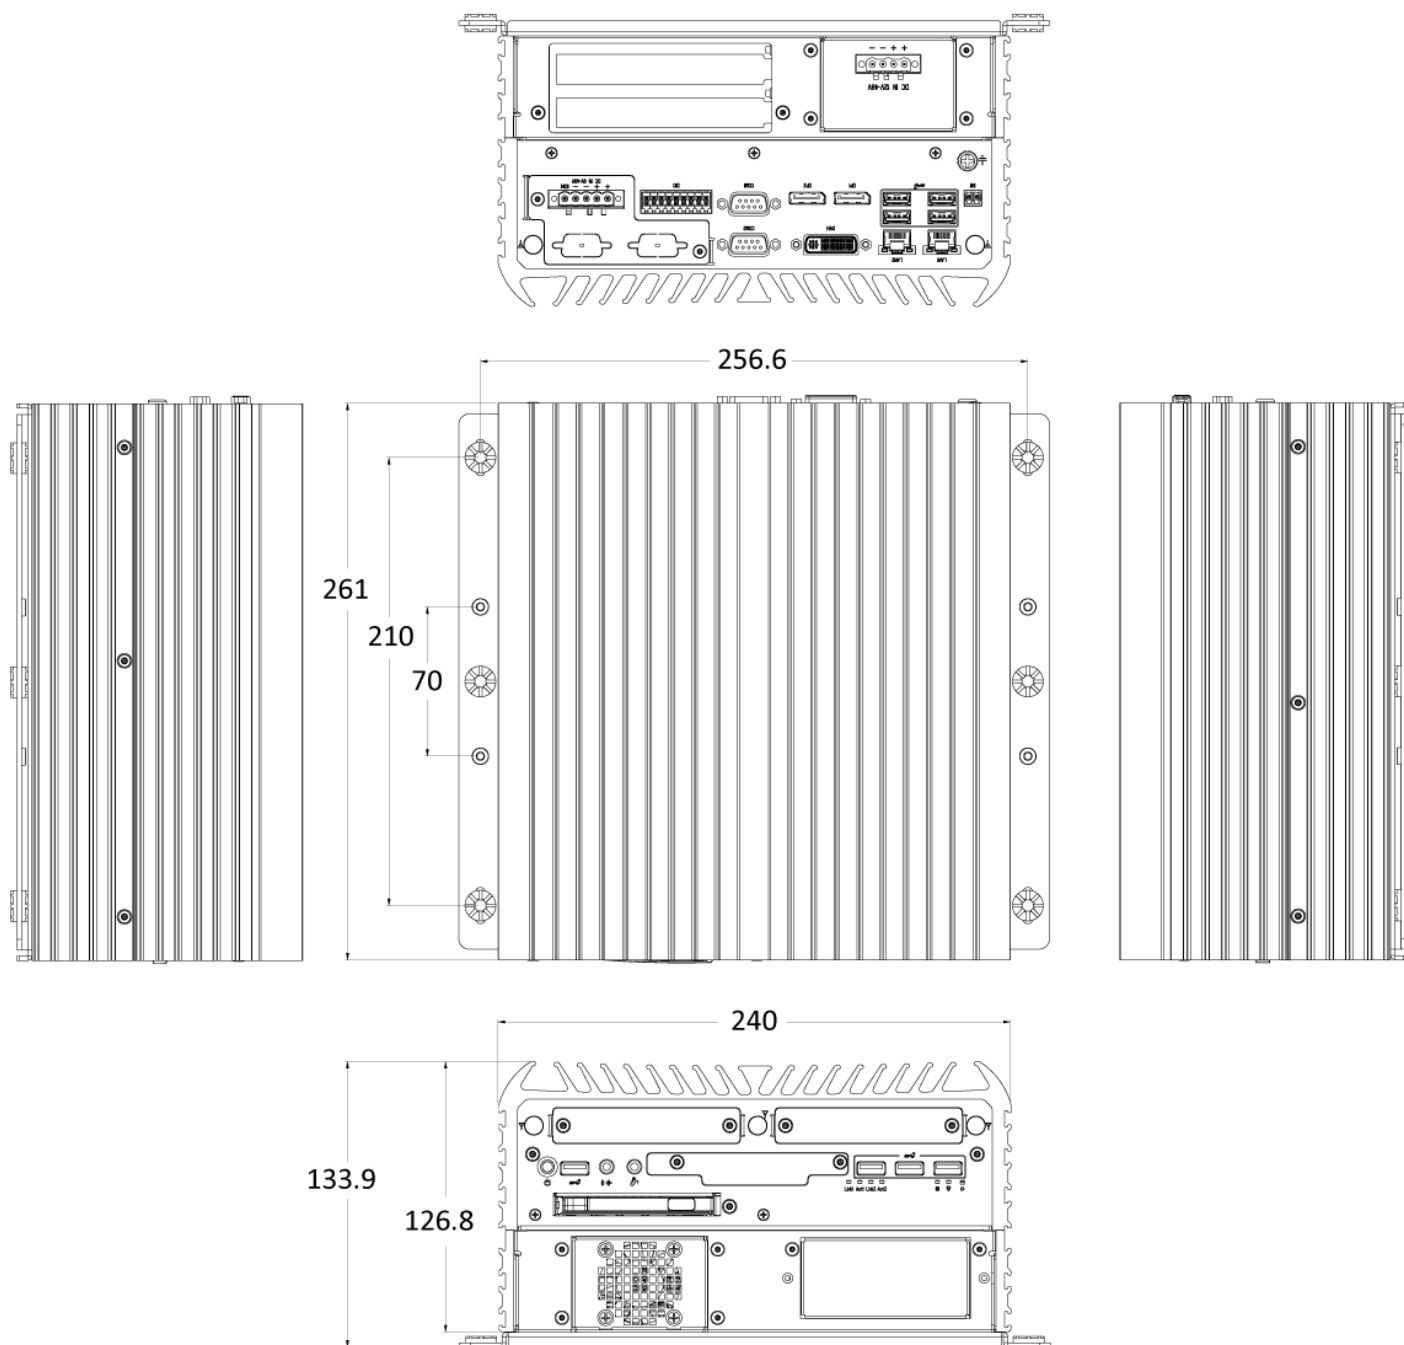




1.4.6 RCO-6000-ADL-4NH

Unit: mm

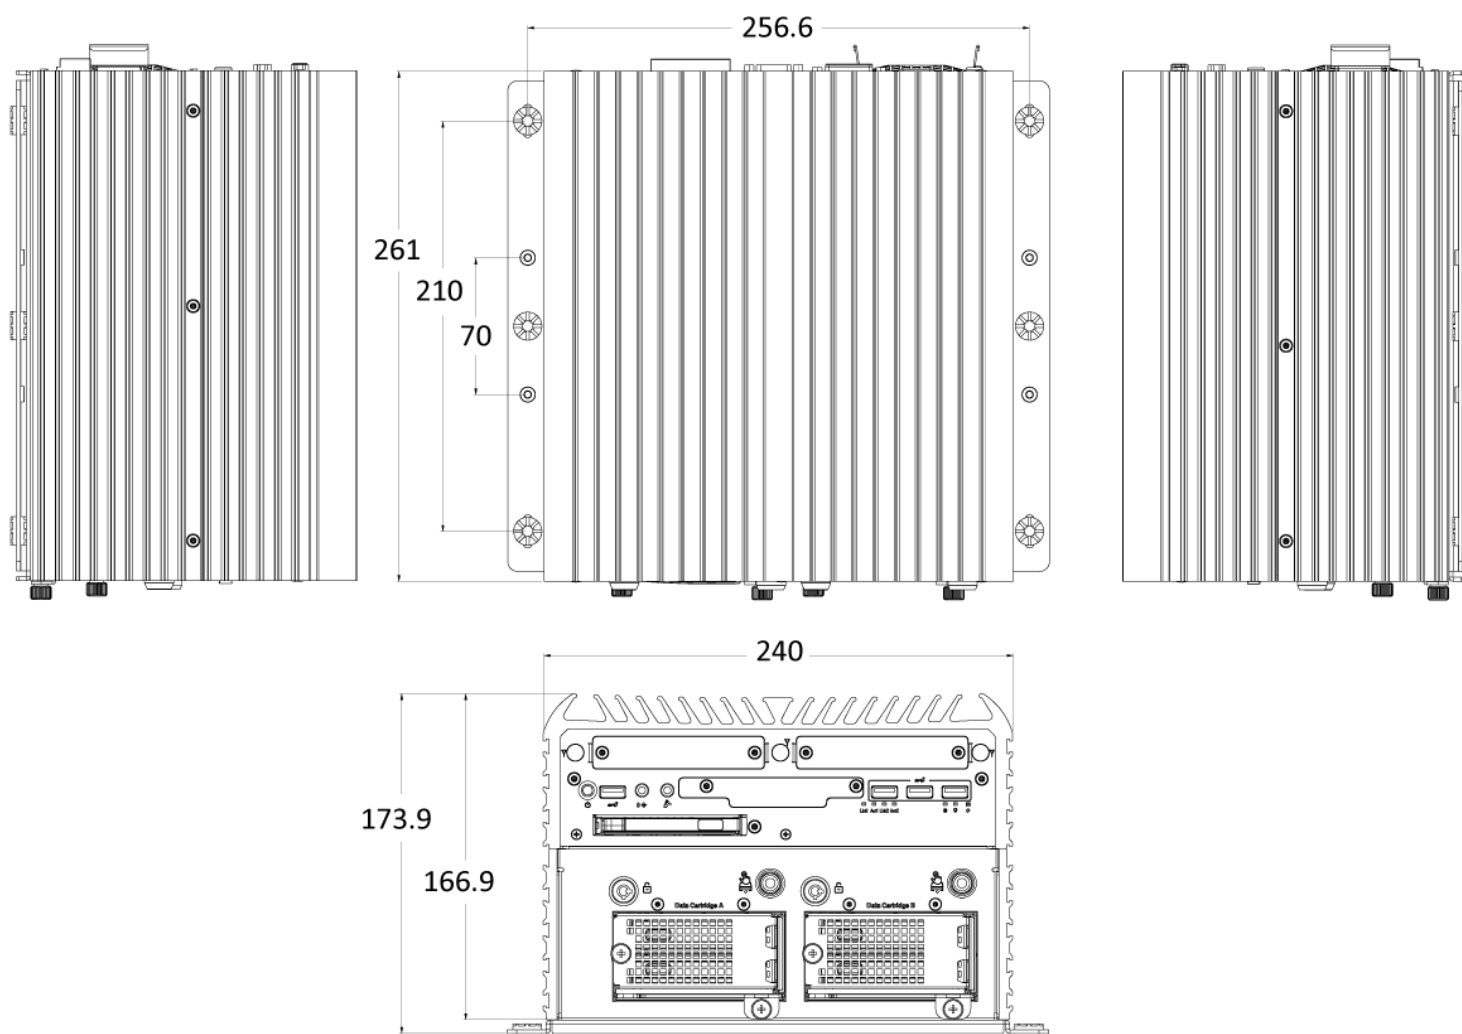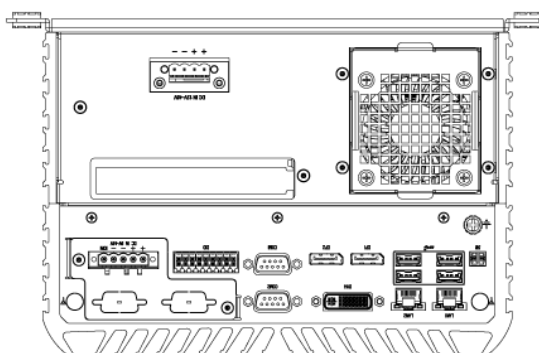




1.4.7 RCO-6000-ADL-4NS

Unit: mm

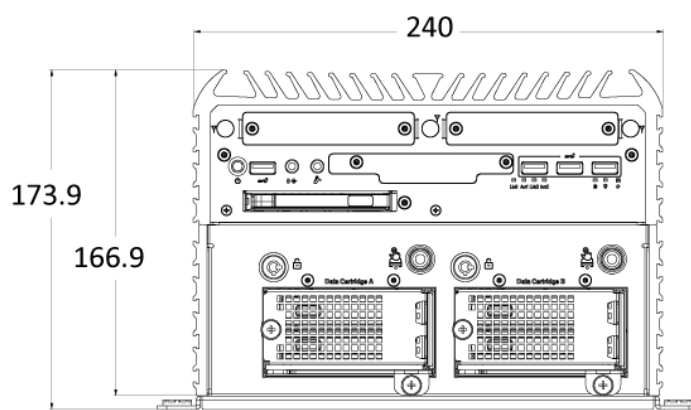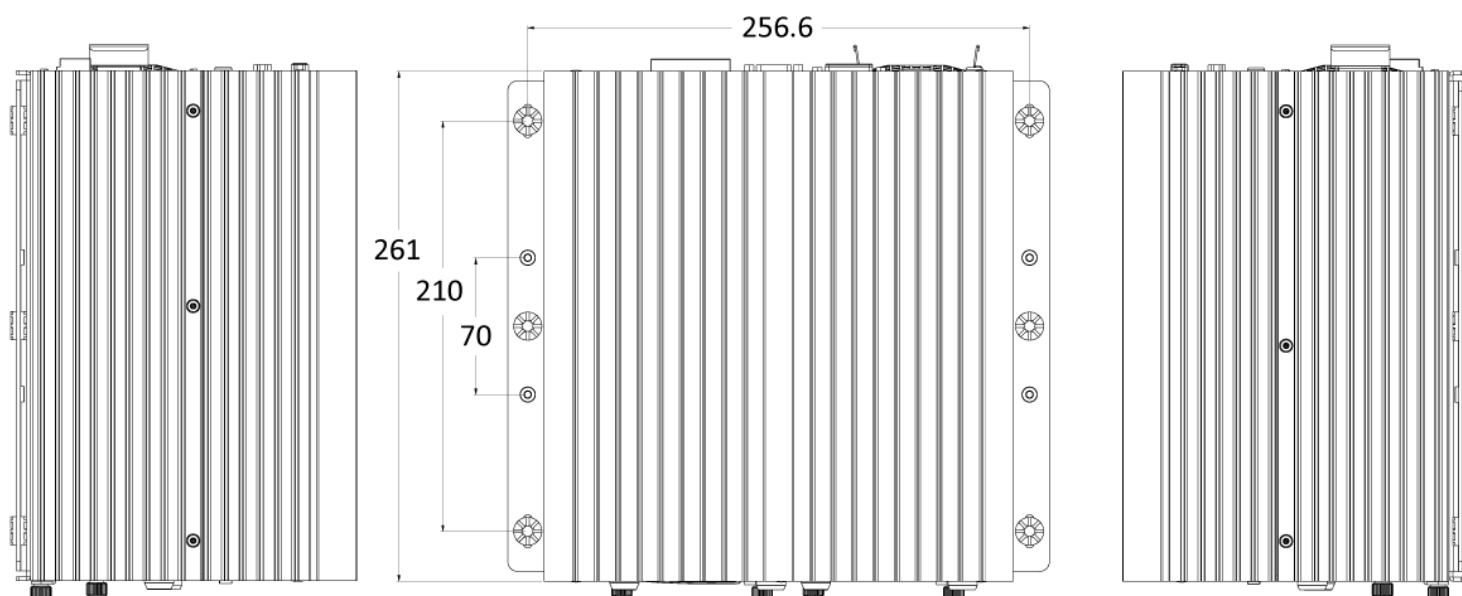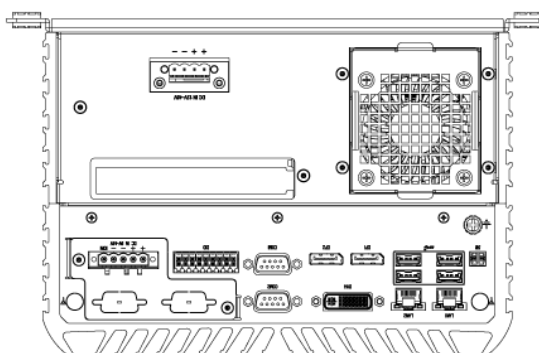

1.4.8 RCO-6000-ADL-8NS

Unit: mm

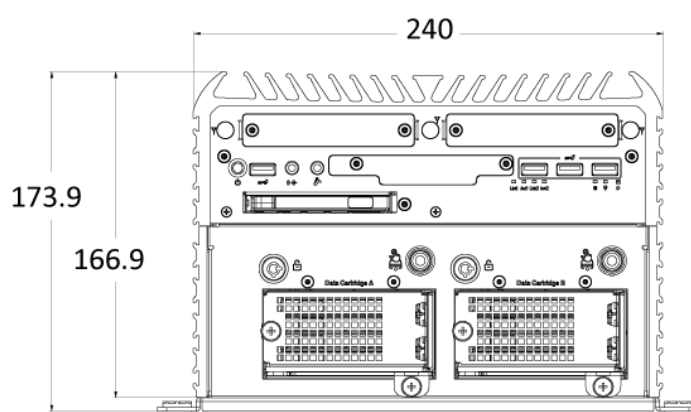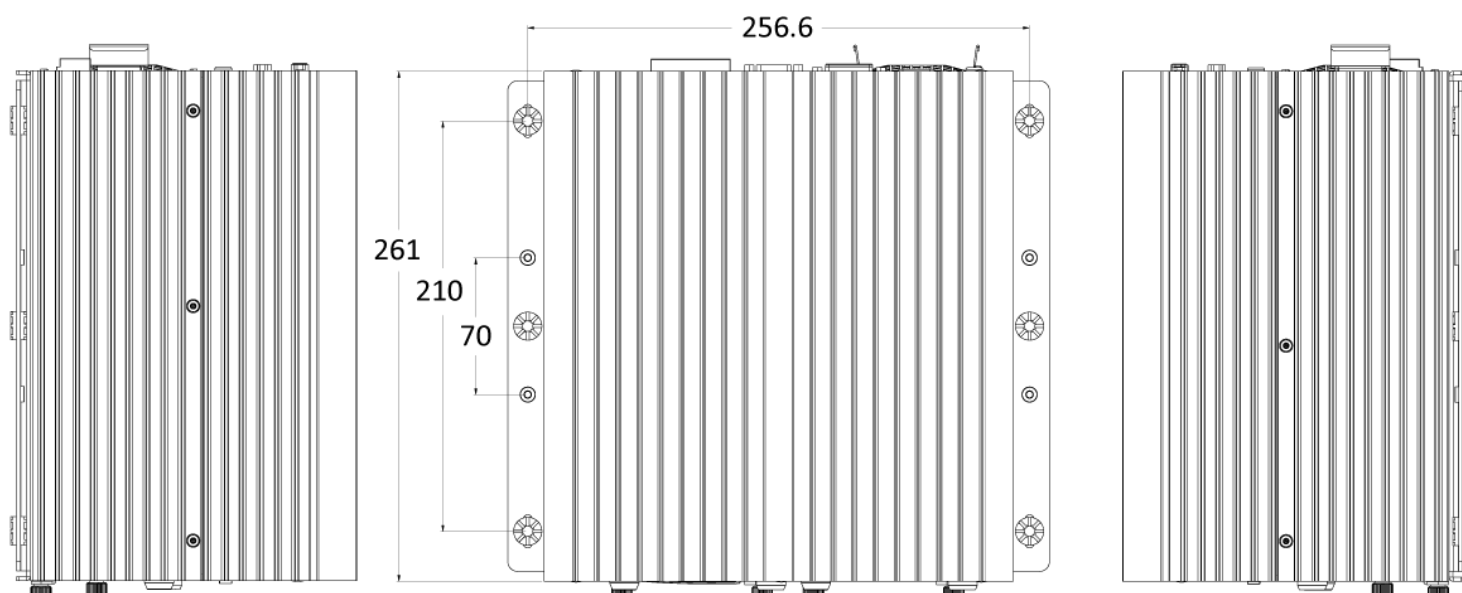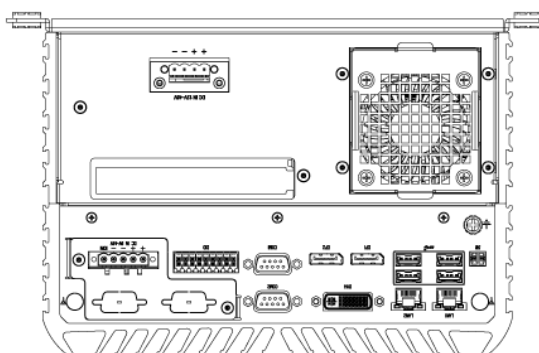


Chapter 2


Mechanical Specifications

2.1 Switch and Connector Locations

2.1.1 Top View

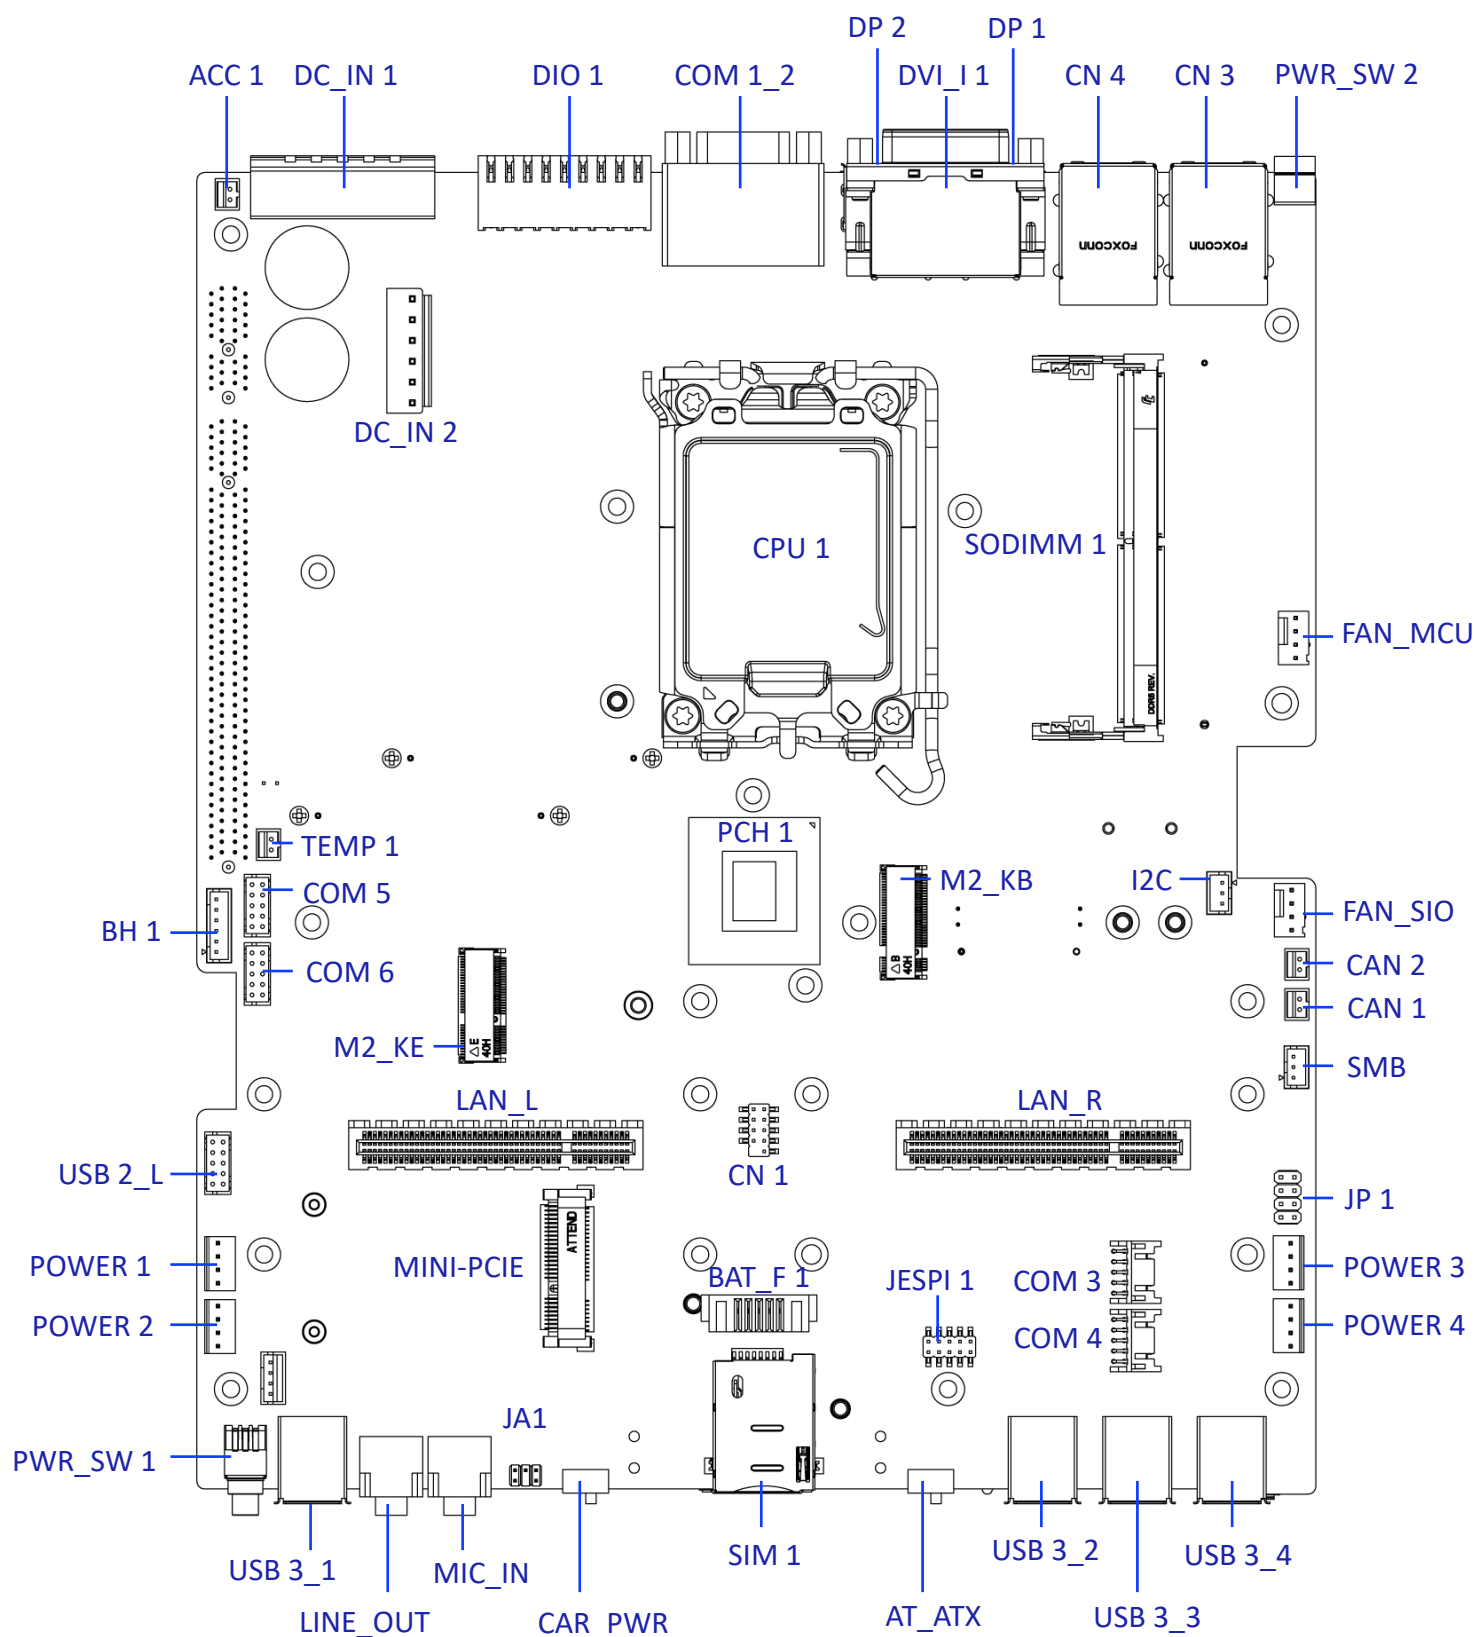

2.1.2 Bottom View


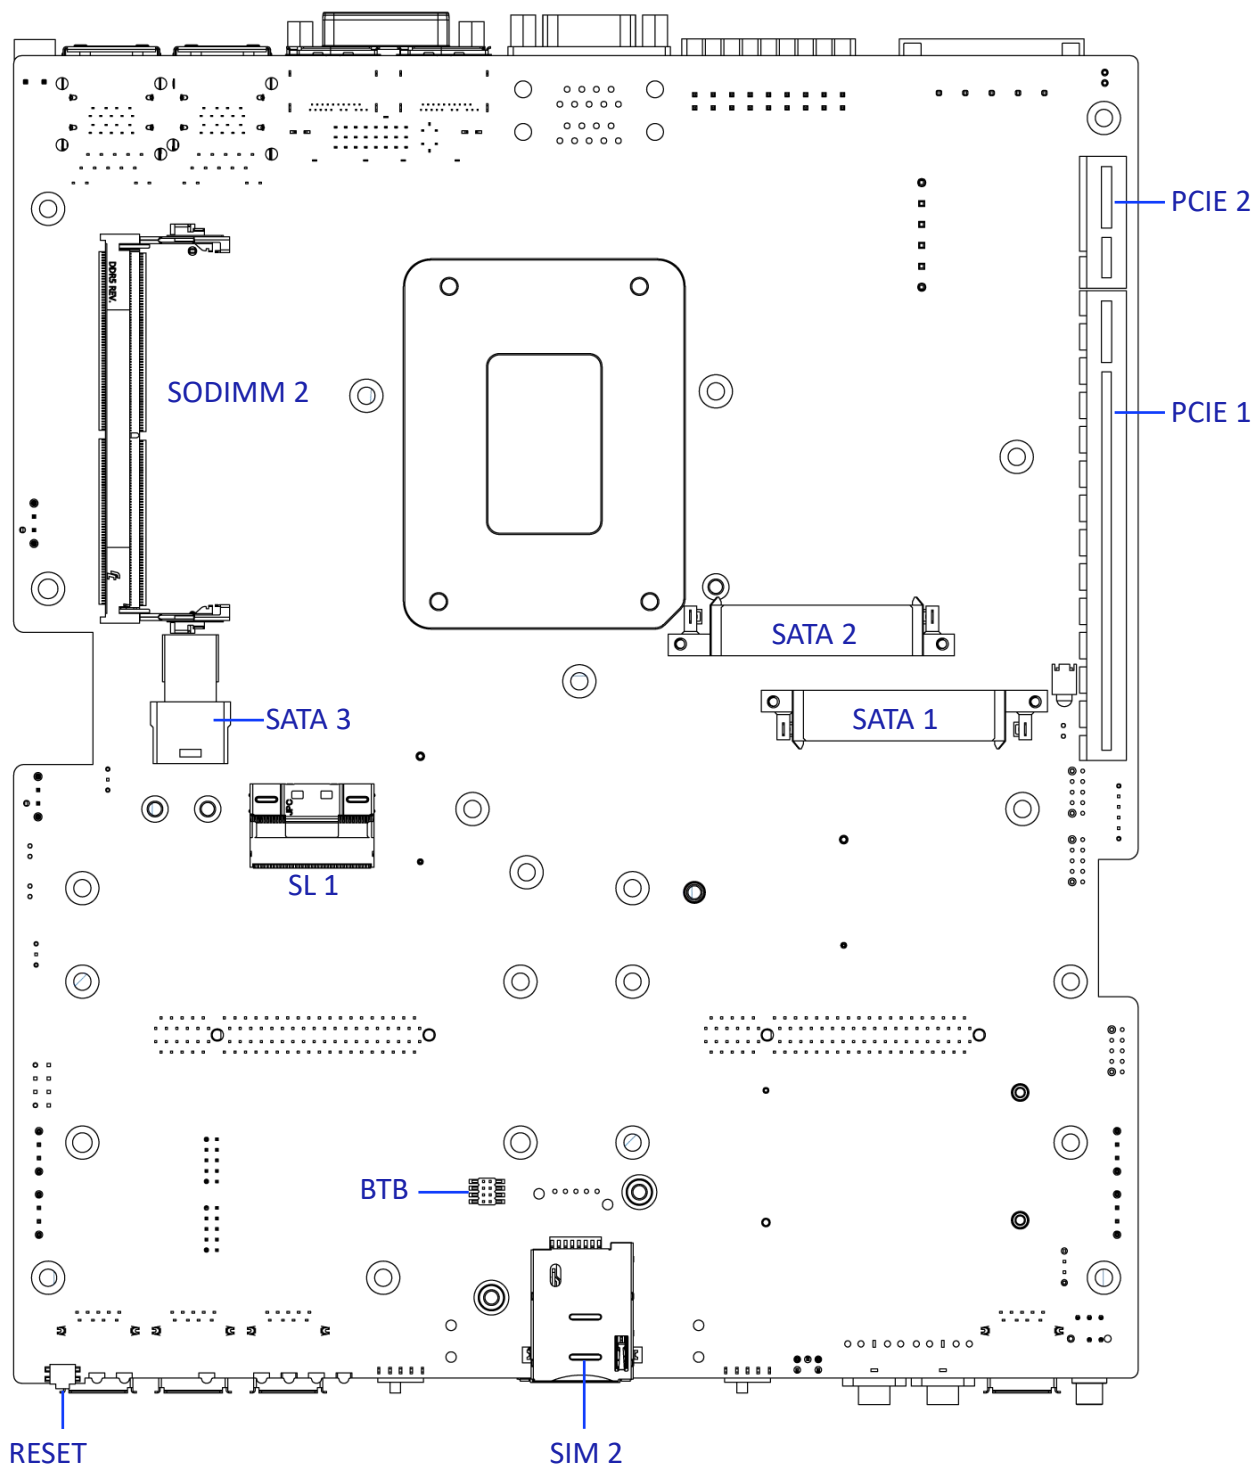


2.2 Connector / Switch Definition

Connector Location	Definition
AT_ATX	AT / ATX Power Mode Switch
PWR_SW1,2,3	Power Switch
RESET	Reset Switch
DC_IN1	5-pin DC +9~48V Power Input Connector
DC_IN2	6-pin DC +9~48V Power Input Connector
DIO1	8DI / 8DO Connector
COM1-6	RS232 / RS422 / RS485 Connector
DP1,2	DP Connector
DVI_I1	DVI-I Connector
CN3,4	LAN and USB3.2 GEN 2 Ports X2
FAN_CPU,FAN_SIO	Smart FAN Connector
PWR1-4	+12V / 5V Power Connector
USB3_1-4	USB 3.2 Gen 2 、 USB 3.2 Gen 1 、 USB2.0
SIM1, SIM2	SIM Card Socket
CAR_PWR	PC mode / CAR mode select
SL1	PCI-Express X8 Slimline Connector
MIC_IN	Mic-in Jack
LINE_OUT	LINE-OUT Jack
M2_KE , M2_KB	M.2 key E , key B Connector
PCIE1,2, LAN_L, LAN_R	PCI-Express X1 Slot, PCI-Express X8 Slot (PCIex4 w POE) , PCI-Express x16 Slot
MINI-PCIE	Mini PCI-Express Socket
PWR_LED	Power LED Status
HDD_LED	HDD Access LED Status
WDT_LED1	Watchdog LED Status
SATA3	SATA X 4 Port
SATA1,2	SATA with Power Connector

2.3 I/O Interface Descriptions



2.3.1 ESPI Debug Con

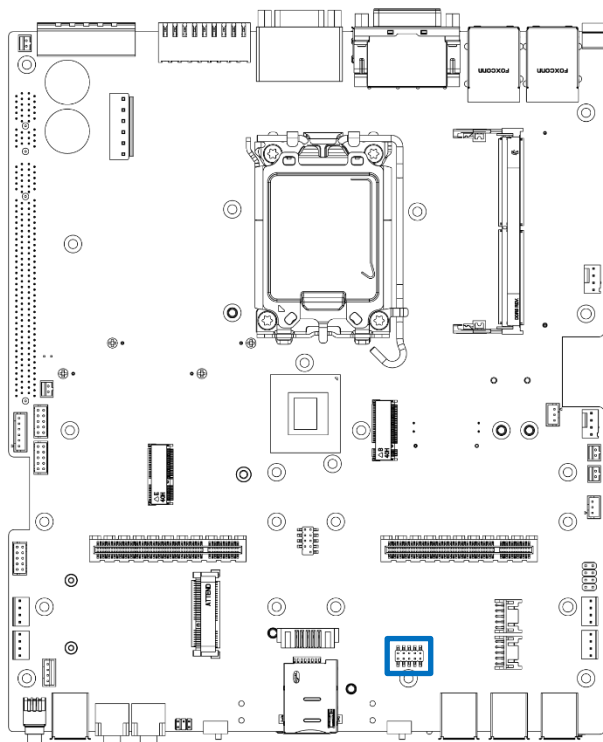

JESPI 1

Pin	Signal	Pin	Signal
1	ESPI_IO_0	2	3.3V
3	ESPI_IO_1	4	ESPI_RESET#
5	ESPI_IO_2	6	ESPI_CS#
7	ESPI_IO_3	8	ESPI_CLOCK
9	N/A	10	GND



2.3.2 Power Con

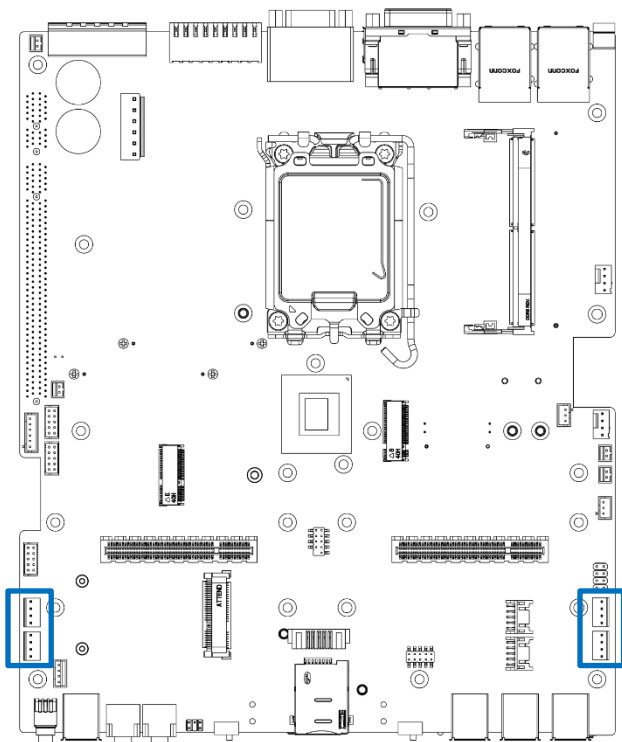

POWER 1~4

Pin	Signal
1	+5V
2	GND
3	GND
4	+12V



2.3.3 DC IN 1 : 9V ~ 48V

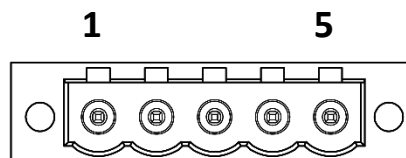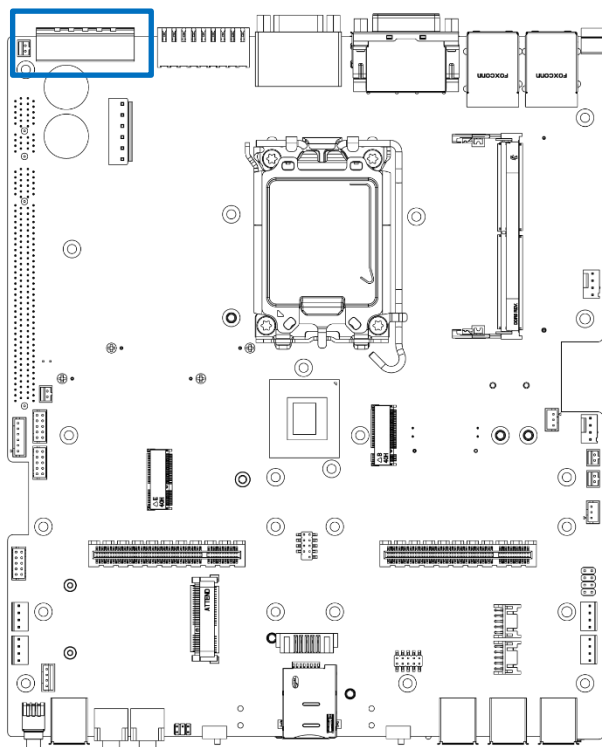

DC IN 1

Pin	Signal
1	+9V ~ +48V
2	+9V ~ +48V
3	GND
4	GND
5	IGN



2.3.4 DC IN 2 : 9V ~ 48V

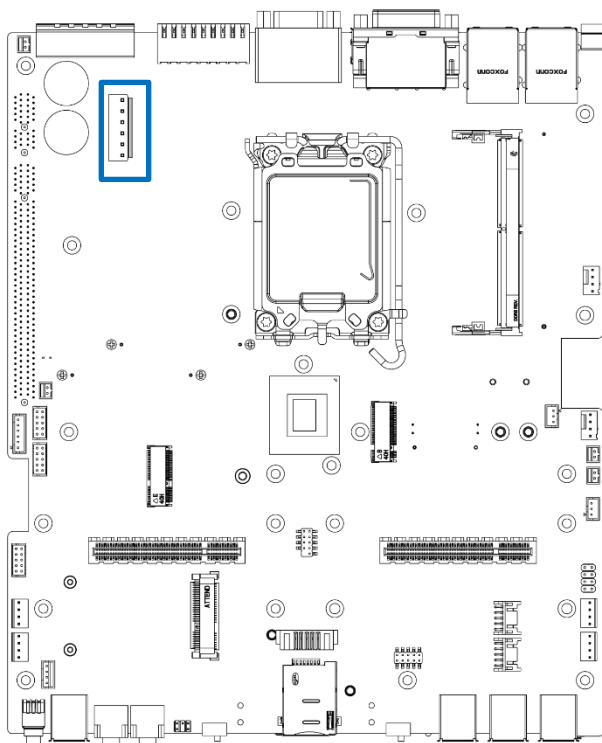

DC IN 2

Pin	Signal
1	+9V ~ +48V
2	+9V ~ +48V
3	+9V ~ +48V
4	GND
5	GND
6	GND

2.3.5 COM Con

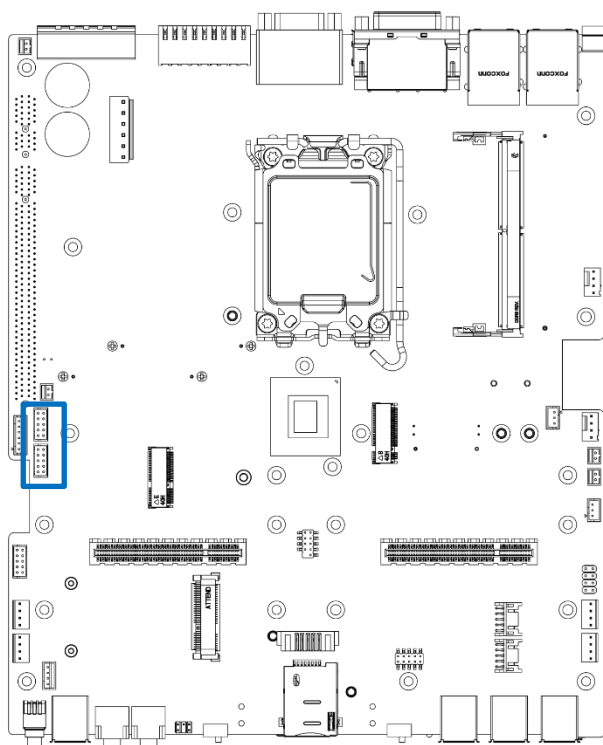



COM 5, COM 6

Pin	Signal	Pin	Signal
1	DCD#	2	DSR#
3	RXD	4	RTS#
5	TXD	6	CTS#
7	DTR#	8	RI#
9	GND	10	GND

RS232 / RS422 / RS485 Connector 2x5 10-pin box header, 2.0mm pitch

Pin	Signal	RS422 / 485 Full Duplex Definition	RS485 Half Duplex Definition
1	DCD#	TX-	DATA-
2	DSR#		
3	RxD	TX+	DATA+
4	RTS#		
5	TxD	RX+	
6	CTS#		
7	DTR#	RX-	
8	RI#		
9	GND	GND	GND
10	GND	GND	GND



COM Con

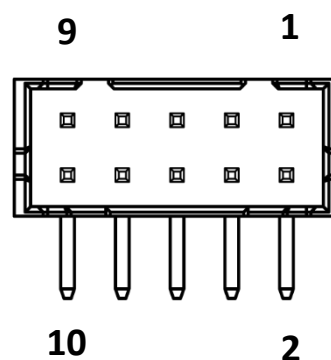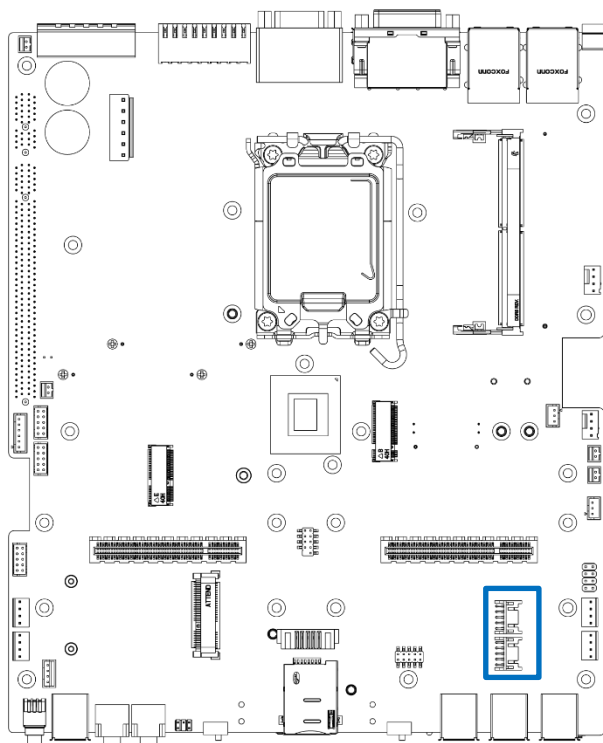

COM 3 , COM 4

Pin	Signal	Pin	Signal
1	DCD#	2	DSR#
3	RXD	4	RTS#
5	TXD	6	CTS#
7	DTR#	8	RI#
9	GND	10	GND

COM Con

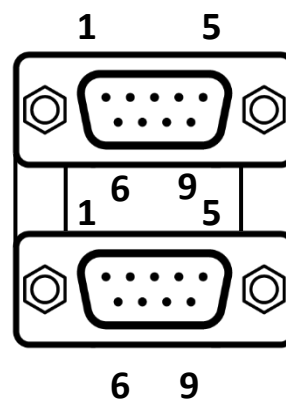
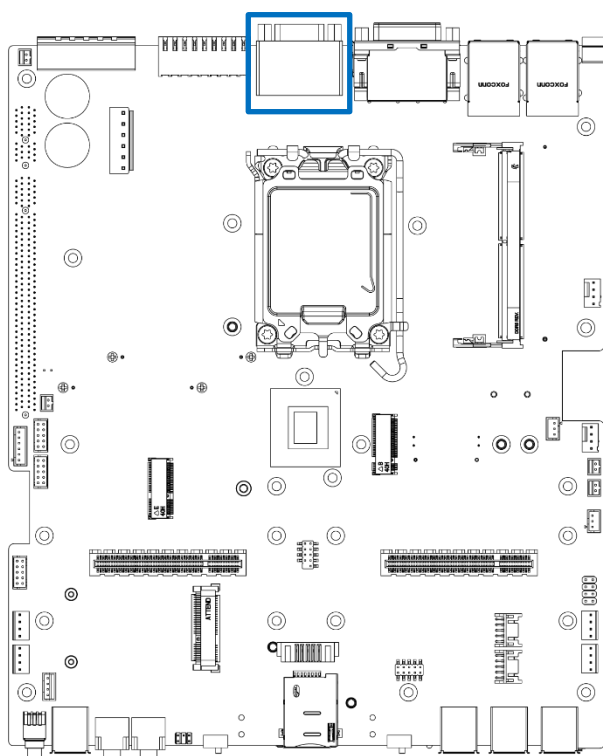


COM 1_2

RS232 / RS422 / RS485 Connector Type: 9-pin D-Sub

Pin	RS232 Definition	RS422 / 485 Full Duplex Definition	RS485 Half Duplex Definition
1	DCD#	TX-	DATA-
2	RxD	TX+	DATA+
3	TxD	RX+	
4	DTR#	RX-	
5	GND	GND	GND
6	DSR#		
7	RTS#		
8	CTS#		
9	RI#		



2.3.6 SF100 SPI Con

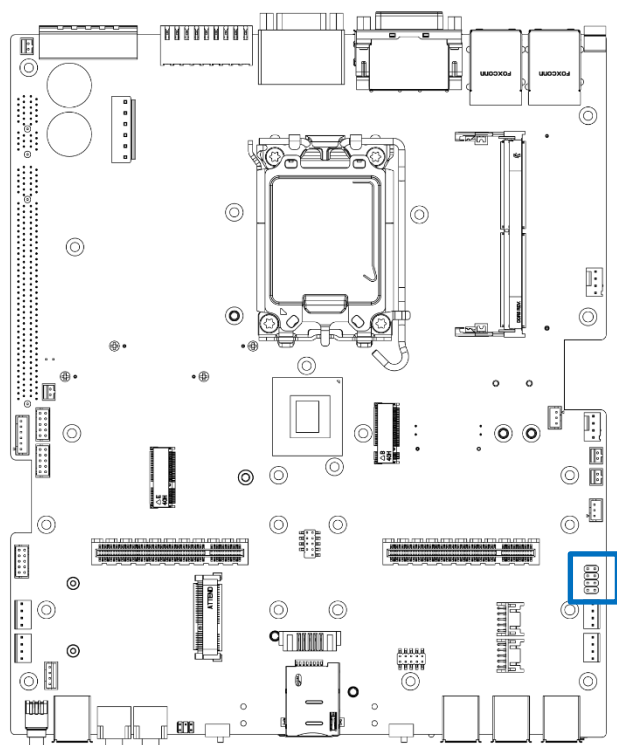

JP 1

Switch	Definition
1	Power (3V)
2	GND
3	CS#
4	CLK
5	MISO
6	MOSI
7	NC
8	SPI_GATE#



2.3.7 AT / ATX Power Mode Switch

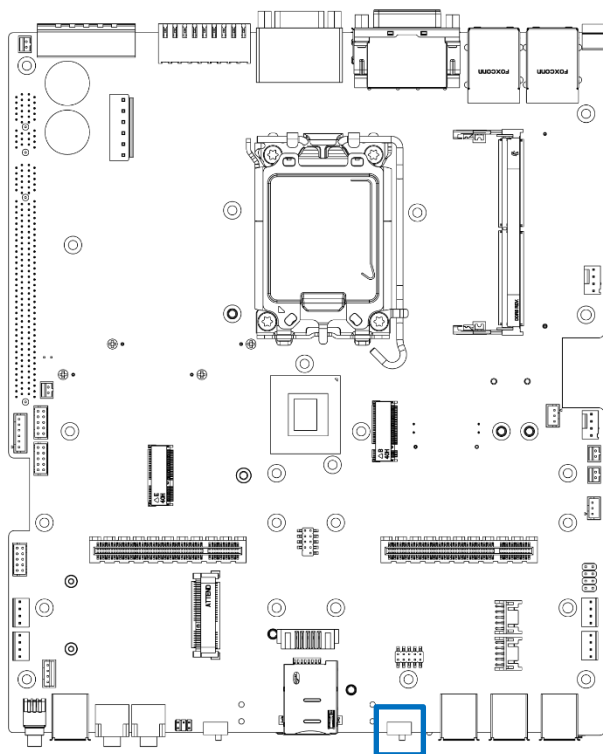

AT_ATX

Switch	Definition
1-2 (Left)	ATX Power Mode (Default)
2-3 (Right)	AT Power Mode



2.3.8 PC / Car Mode Switch

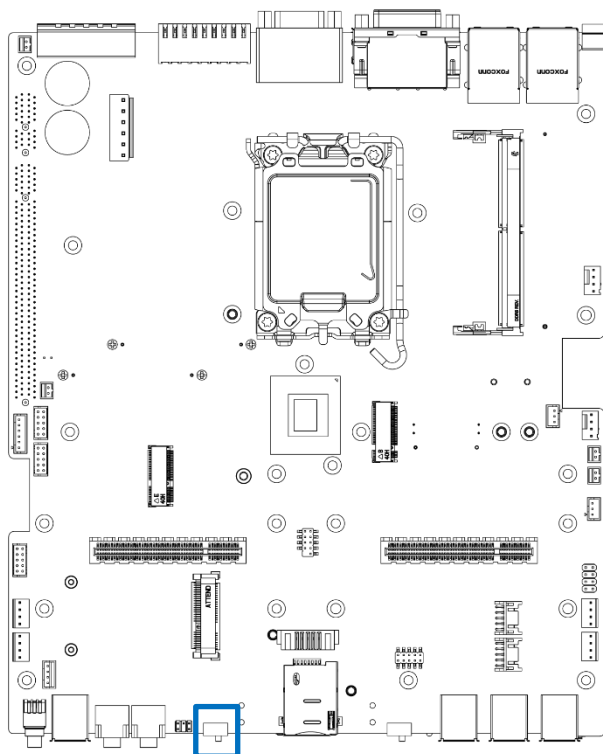

CAR_PWR

Switch	Definition
1-2 (Left)	PC Power Mode (Default)
2-3 (Right)	Power Ignition Mode



2.3.9 Line-out Jack (Green) Connector Type: 5-pin Phone Jack

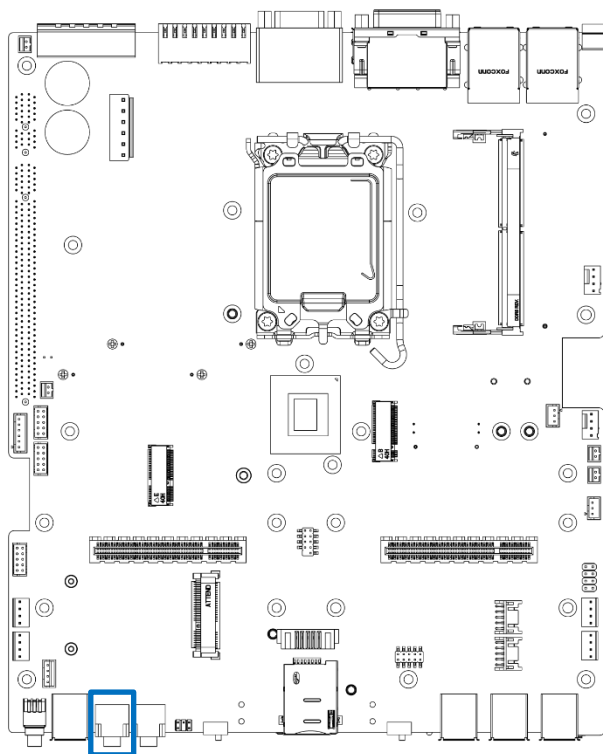

LINE_OUT

Switch	Definition
1	GND
2	OUT_R
3	GND
4	GND
5	OUT_L



2.3.10 Microphone-in Jack (Pink) Connector Type: 5-pin Phone Jack

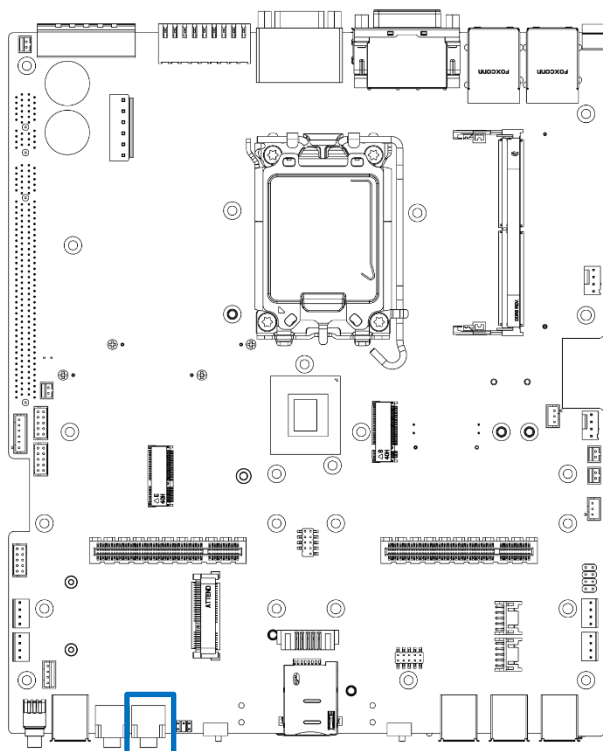

MIC_IN

Switch	Definition
1	GND
2	MIC_R
3	GND
4	GND
5	MIC_L


2.3.11 Clear BIOS Switch

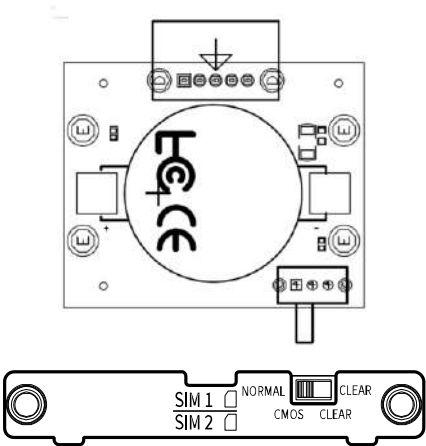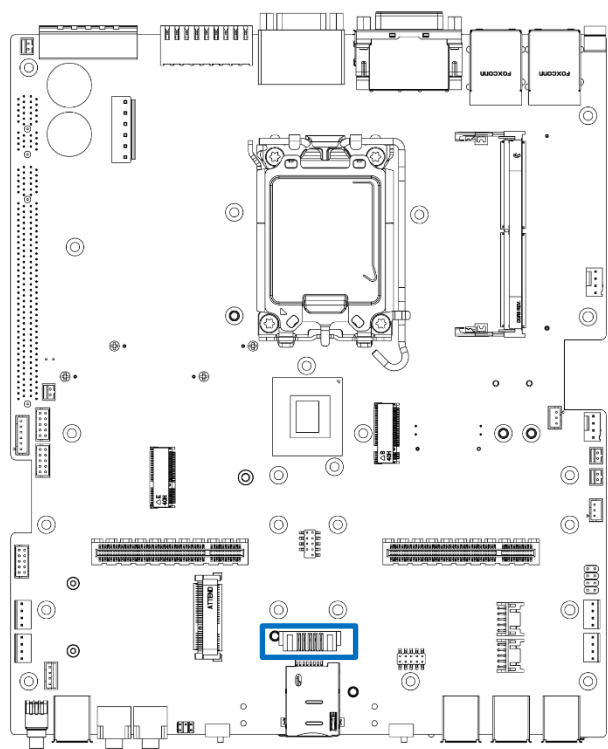

CLR_CMOS

Switch	Definition
1-2 (Left)	Normal Status (Default)
2-3 (Right)	Clear BIOS



2.3.12 Power Button

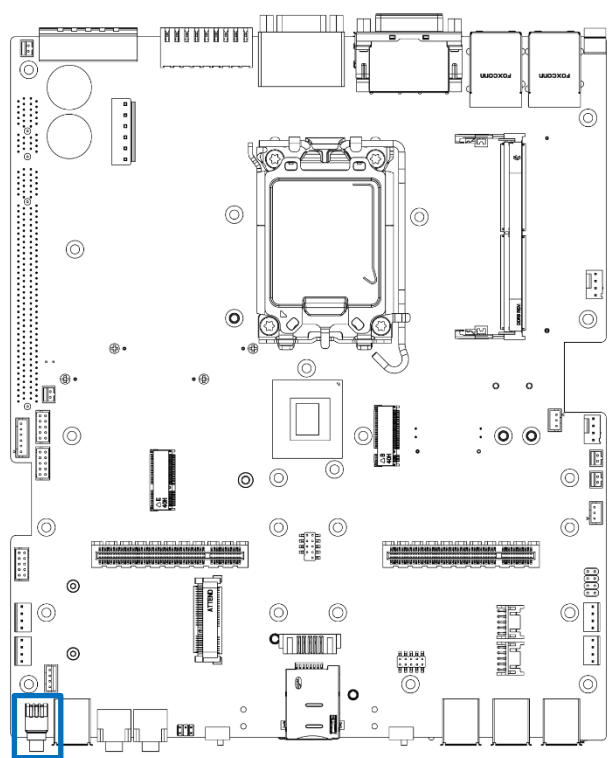

PWR_SW 1

Switch	Definition
1	NC
2	Power Button
3	NC
4	GND
5	NC
6	GND

2.3.13 Remote Power Switch Type: Terminal Block 1x2 2-pin, 3.5mm pitch


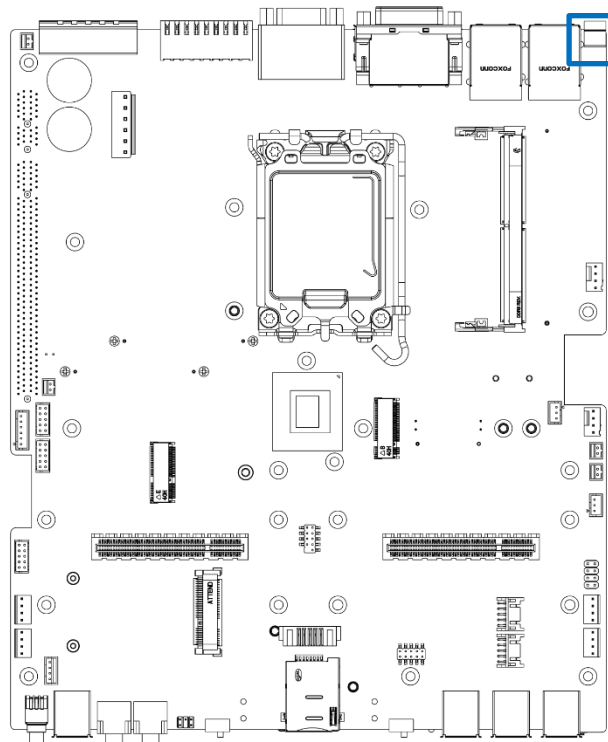


1 2

PWR_SW 2

Pin	Definition
1	Power Button
2	GND


2.3.14 For WCO-6000-ADL

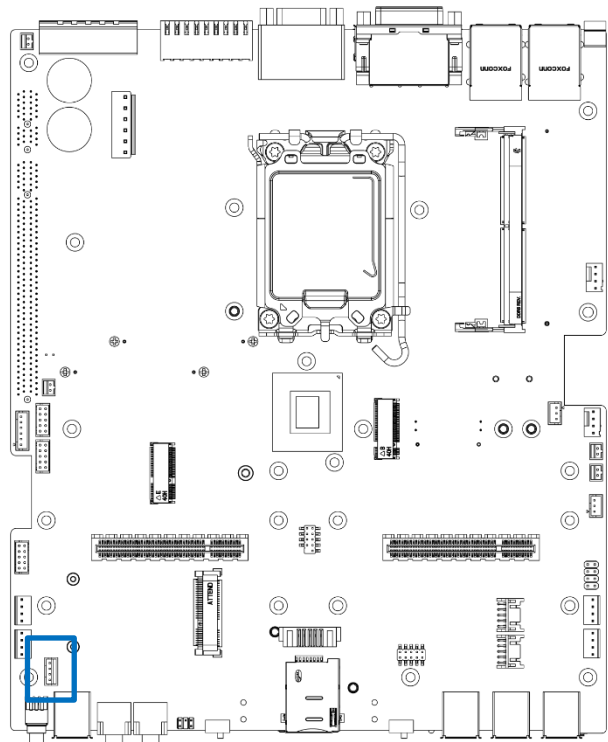

PWR_SW 3

Pin	Definition
1	Power Button
2	PWR_LED
3	HDD_LED
4	GND



2.3.15 Reset Button

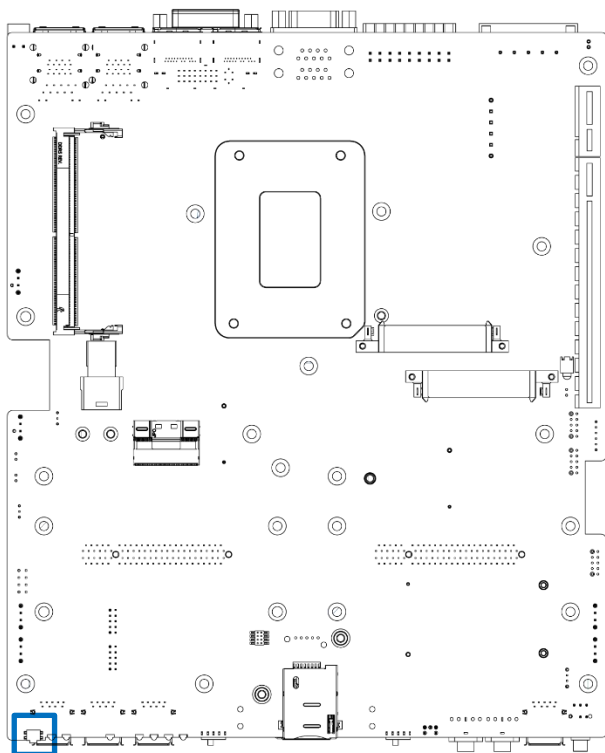

RESET

Switch	Definition
1,2	RESET
3,4	GND



2.3.16 USB 3.1 Connector, GEN2 x4 ports, Type A

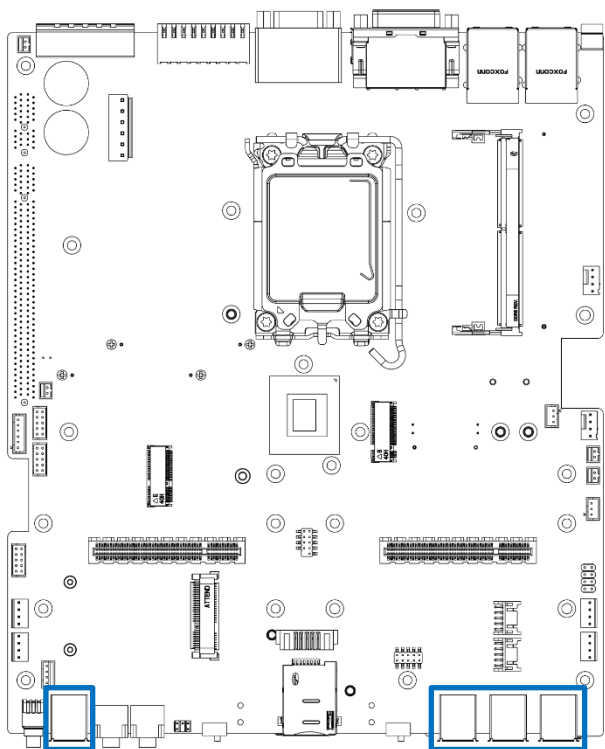

USB 3_1 , USB 3_2 , USB 3_3 , USB 3_4

Pin	Definition
1	+5V
2	USB2_D-
3	USB2_D+
4	GND
5	USB3_RX-
6	USB3_RX+
7	GND
8	USB3_TX-
9	USB3_TX+



2.3.17 USB3.0 Connector, 2x5 10-pin header, 2.0mm pitch

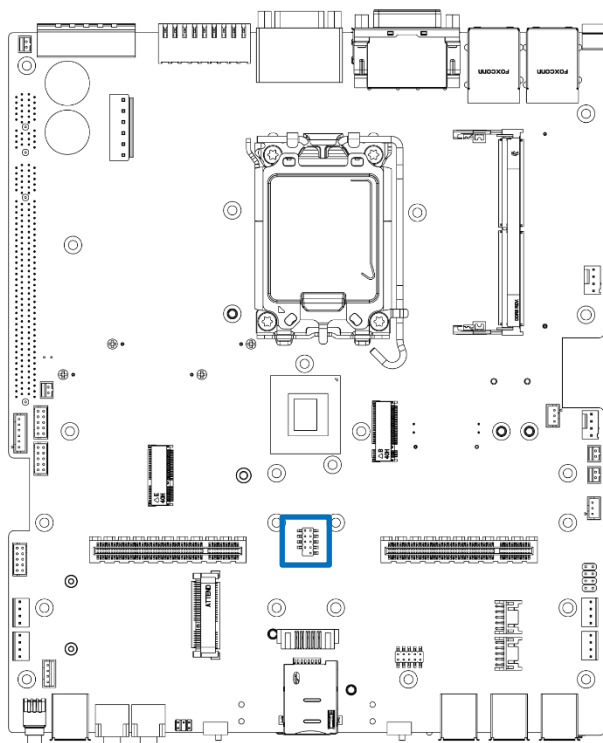

CN 1

Switch	Definition
1	+5V
2	USB3_TX-
3	USB_D-
4	USB3_TX+
5	USB_D+
6	GND
7	GND
8	USB3_RX-
9	NC
10	USB3_RX+



2.3.18 USB2.0 Connector, 2x5 10-pin box header, 2.0mm pitch

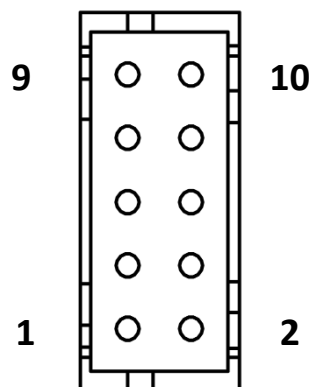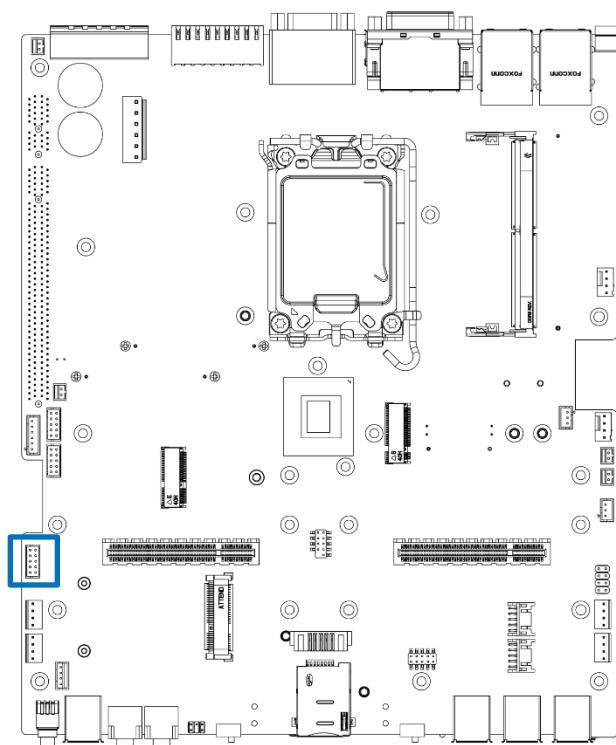

USB 2_L

Switch	Definition
1	NC
2	+5V
3	NC
4	USB2_D-
5	NC
6	USB2_D+
7	NC
8	GND
9	NC
10	GND



2.3.19 LAN and USB 3.1 GEN 2 Ports Connector Type: RJ45 port with LEDs and dual USB 3.1 ports

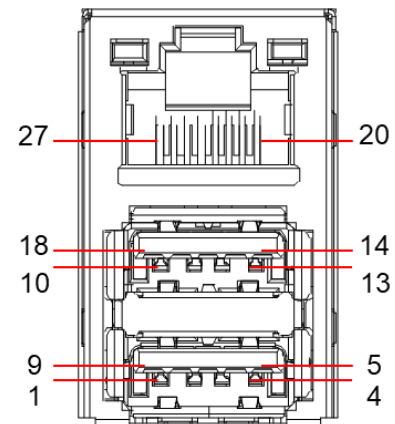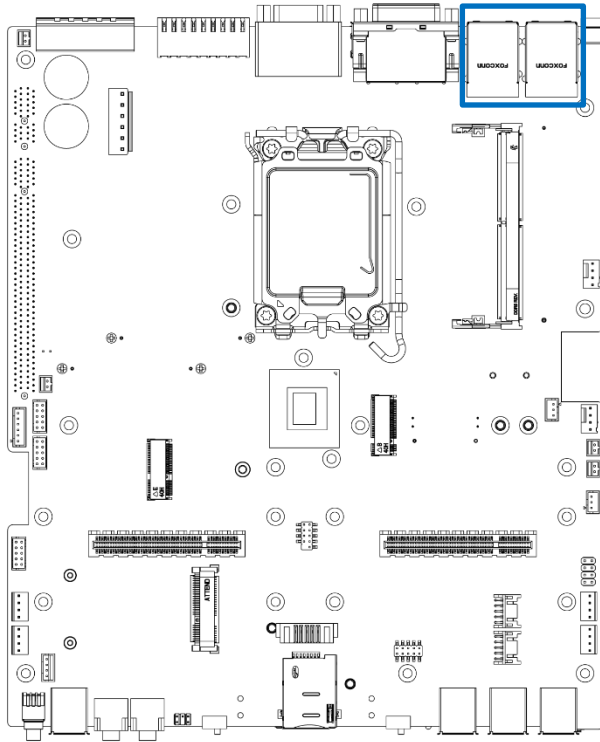

CN3, CN4

Pin	Definition	Pin	Definition	Pin	Definition
1	+5V	10	+5V	20	LAN1_MDI0P
2	USB2_D1-	11	USB2_D2-	21	LAN1_MDI0N
3	USB2_D1+	12	USB2_D2+	22	LAN1_MDI1P
4	GND	13	GND	23	LAN1_MDI2P
5	USB3_RX1-	14	USB3_RX2-	24	LAN1_MDI2N
6	USB3_RX1+	15	USB3_RX2+	25	LAN1_MDI1N
7	GND	16	GND	26	LAN1_MDI3P
8	USB3_TX1-	17	USB3_TX2-	27	LAN1_MDI3N
9	USB3_TX1+	18	USB3_TX2+		



2.3.20 DVI-I Connector

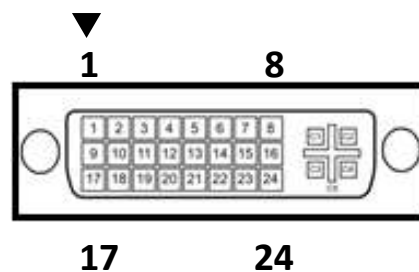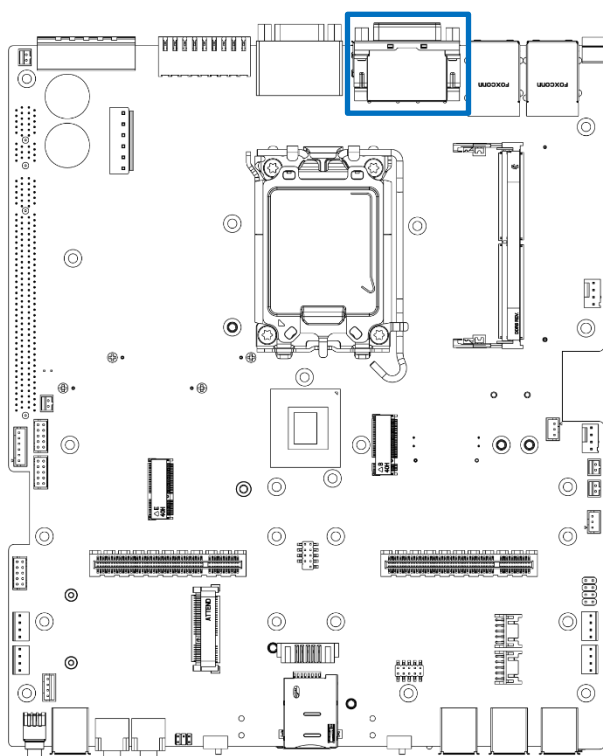

DVI_I 1

Pin	Definition	Pin	Definition
1	DVI_TX2-	16	DVI Hot Plug Detect
2	DVI_TX2+	17	DVI_TX0-
3	GND	18	DVI_TX0+
4	NC	19	GND
5	NC	20	VGA_DDC_CLOCK
6	DVI_DDC_CLOCK	21	VGA_DDC_DATA
7	DVI_DDC_DATA	22	GND
8	VGA_VSYNC	23	DVI_TXCLK+
9	DVI_TX1-	24	DVI_TXCLK-
10	DVI_TX1+	C1	VGA_RED
11	GND	C2	VGA_GREEN
12	NC	C3	VGA_BLUE
13	NC	C4	VGA_HSYNC
14	+5V	C5	GND
15	GND		



2.3.21 Display Port Connector

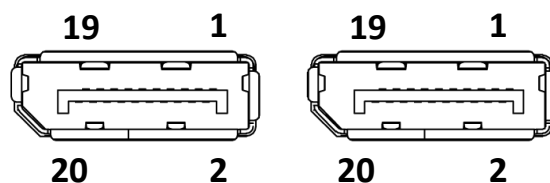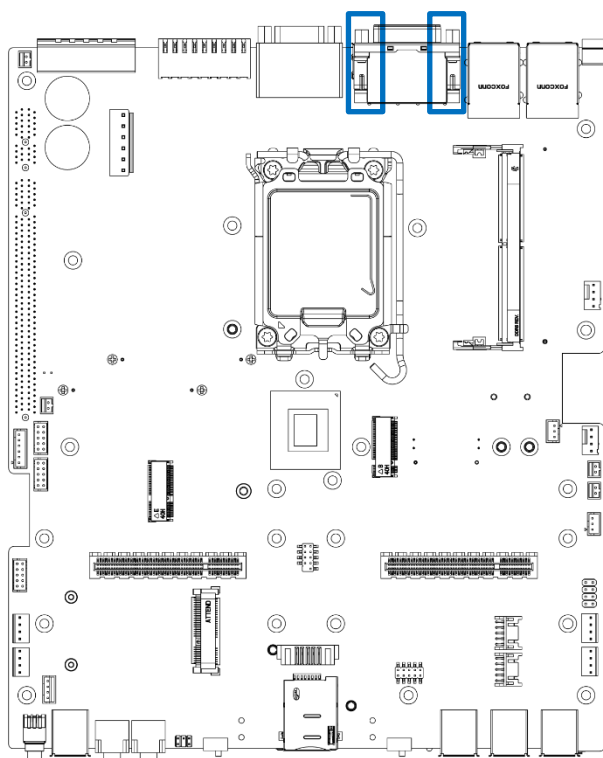

DP 1, DP 2



Pin	Definition	Pin	Definition
1	DP_LANE0_P	11	GND
2	GND	12	DP_LANE3_N
3	DP_LANE0_N	13	GND
4	DP_LANE1_P	14	GND
5	GND	15	DP_AUX_P
6	DP_LANE1_N	16	GND
7	DP_LANE2_P	17	DP_AUX_N
8	GND	18	DP_HPD
9	DP_LANE2_N	19	GND
10	DP_LANE3_P	20	+3.3V

2.3.22 Digital Input / Output Connector Type: Terminal Block 2x9 18-pin, 3.5mm pitch

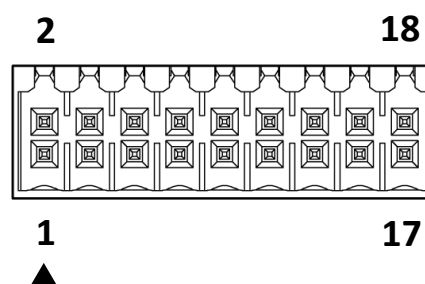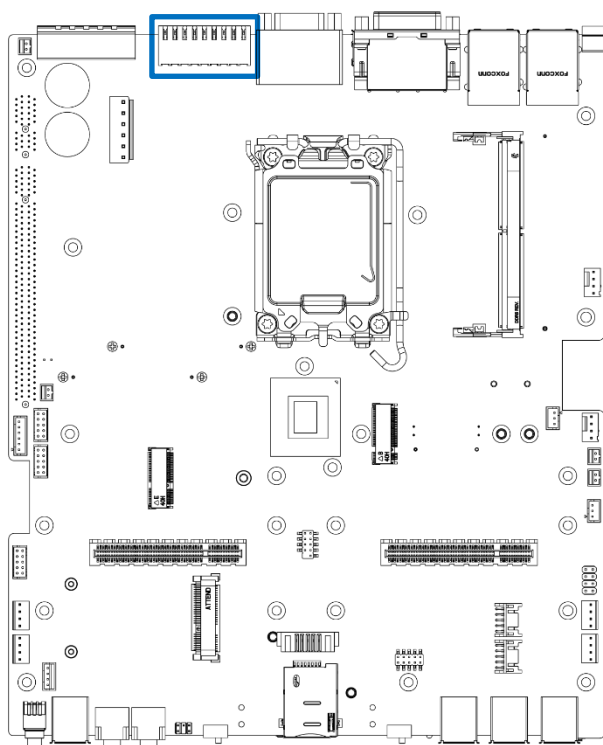



DIO

Pin	Definition	Pin	Definition
1	DIN1	2	DOUT1
3	DIN2	4	DOUT2
5	DIN3	6	DOUT3
7	DIN4	8	DOUT4
9	DIN5	10	DOUT5
11	DIN6	12	DOUT6
13	DIN7	14	DOUT7
15	DIN8	16	DOUT8
17	DC power input (+5V~+24V)	18	GND

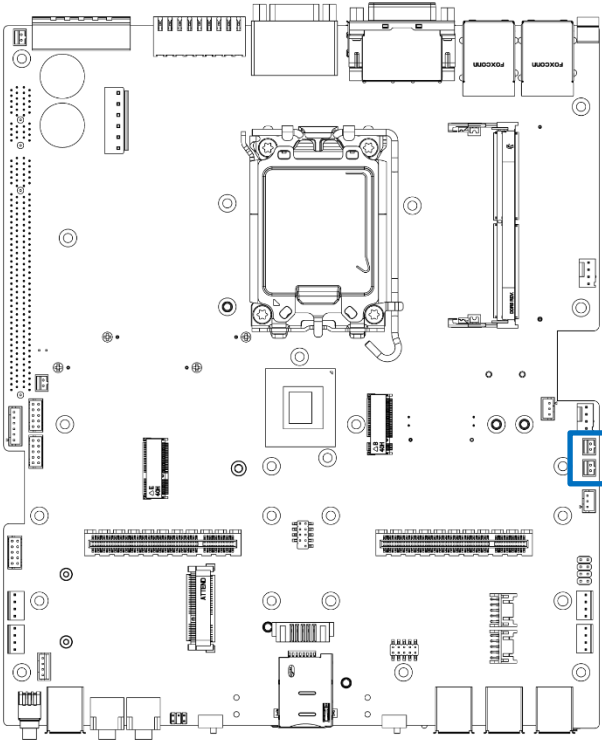



CAN1 CAN2

Pin	Signal
1	CAN_H
2	CAN_L

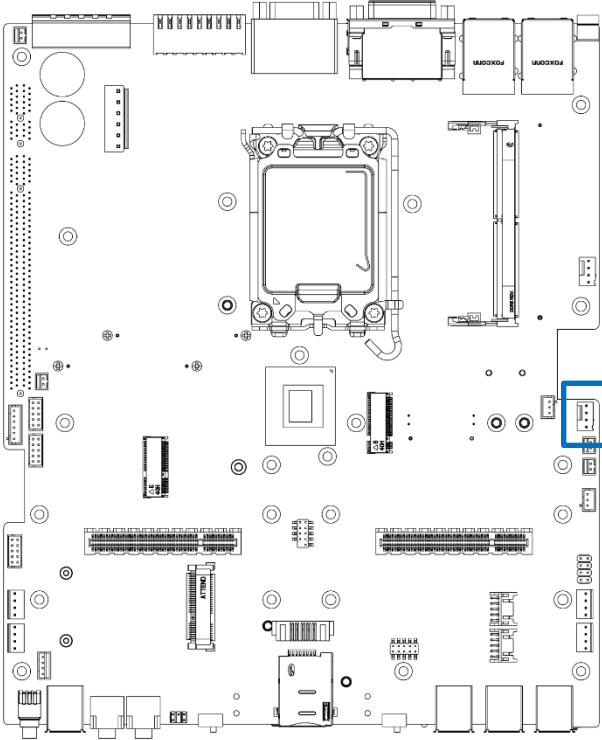

FAN_SIO



Switch	Definition
1	GND
2	+12V
3	Sense
4	Control

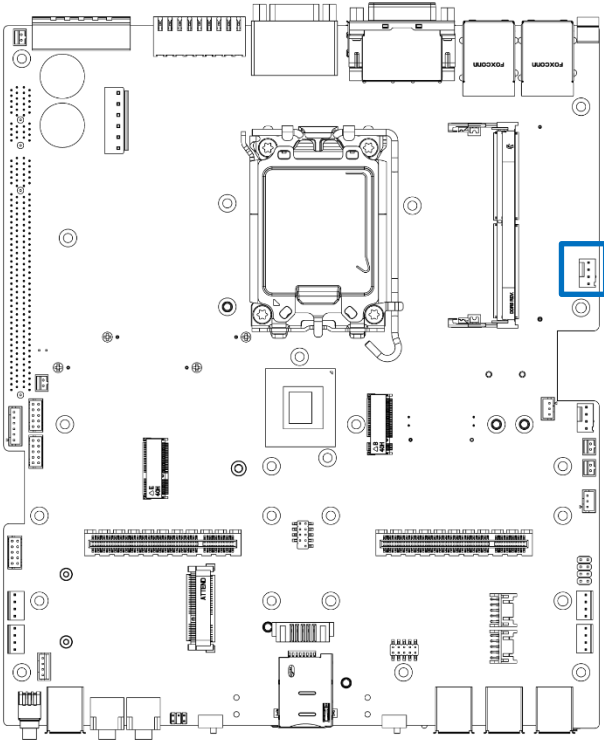



FAN_MCU

Pin	Signal
1	GND
2	+12V
3	Sense
4	Control

For FAN_MCU RT


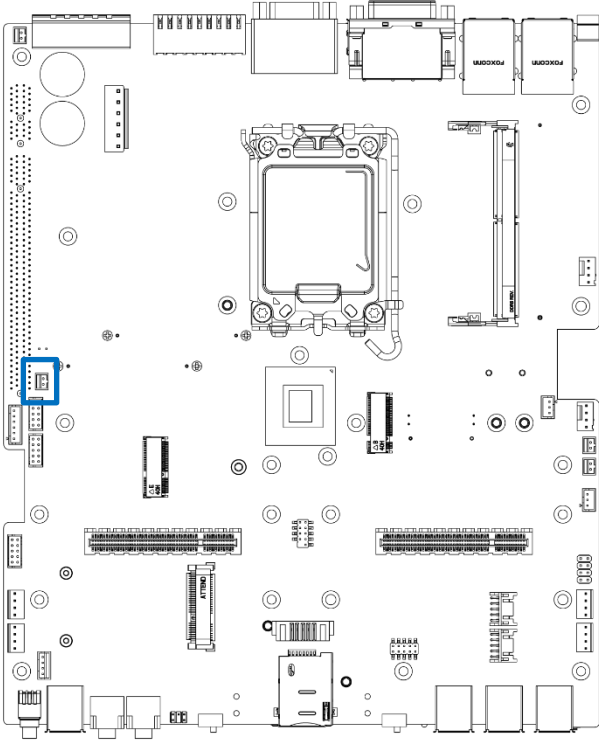


TEMP1

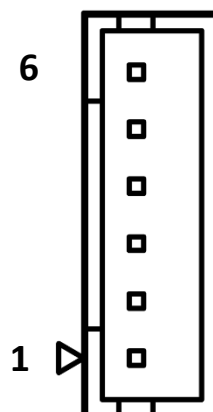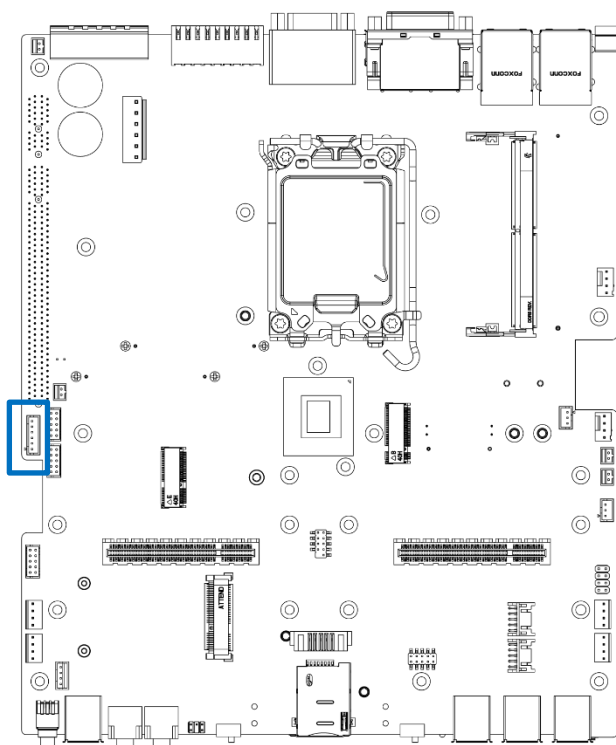



BH 1

Pin	Signal
1	+3.3V
2	PLTRST#
3	SLP S4
4	SLP S5
5	RSTBTN#
6	GND

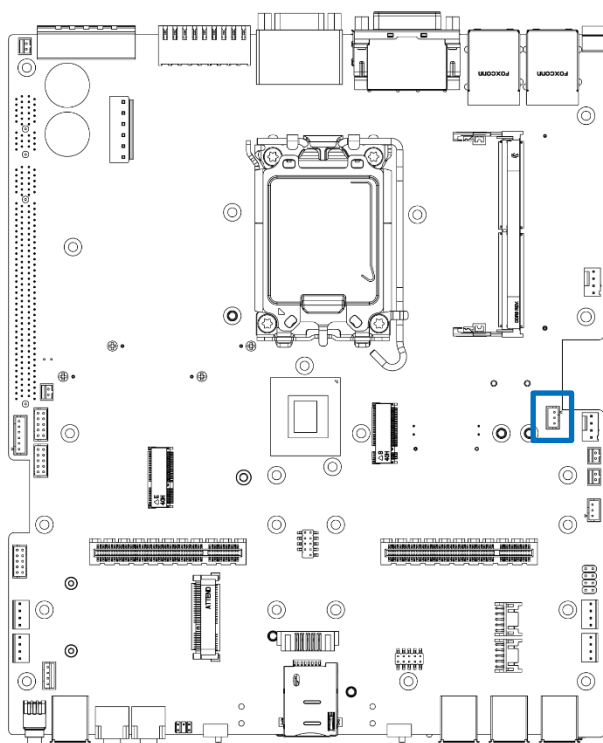

I2C


Switch	Definition
1	I2C_DATA
2	I2C_CLK
3	GND

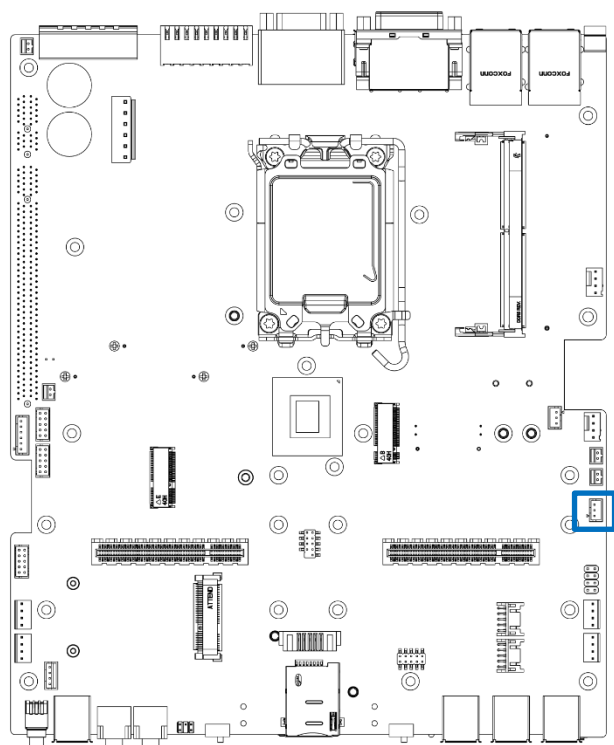

SMB

Pin	Signal
1	SMB_DATA
2	SMB_CLK
3	GND


2.3.23 LED Status

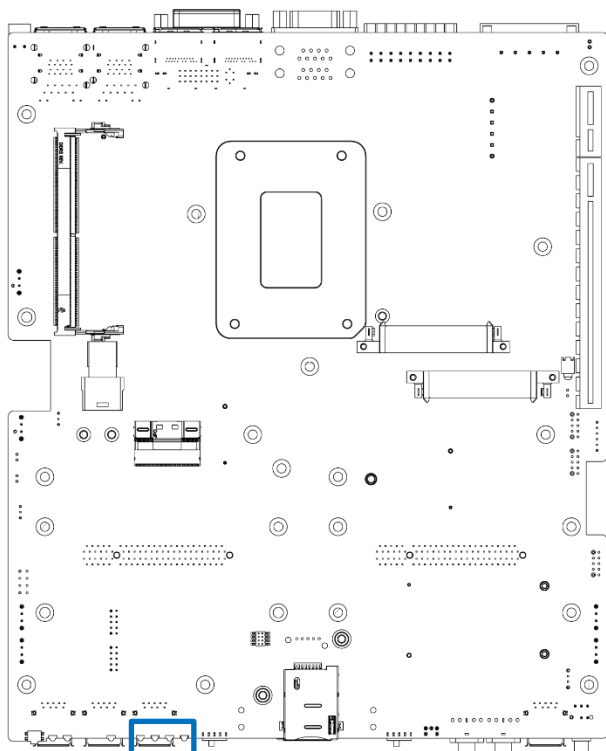

Act LED Status	Definition
Blinking Yellow	Data Activity
Off	No Activity



Link LED Status	CN3 Definition
Steady Orange	1 Gbps Network Link
Steady Green	100 Mbps Network Link
Off	10 Mbps Network Link
Link LED Status	CN4 Definition
Steady Orange	2.5 Gbps Network Link
Steady Green	1 Gbps Network Link
Off	100 Mbps Network Link

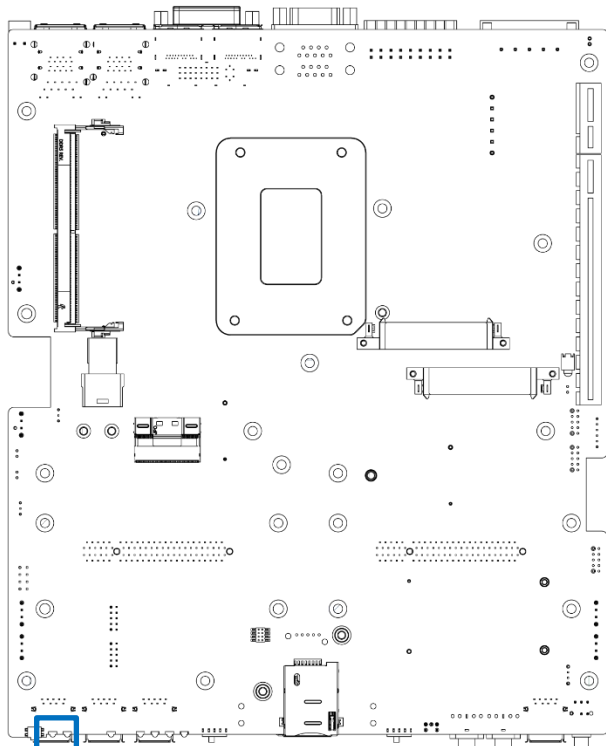

PWR_LED1: Power LED Status


Pin	Definition
1	POWER LED +
2	POWER LED -



HDD_LED1: HDD Access LED Status

Pin	Definition
1	HDD LED+
2	HDD LED-


LED Status

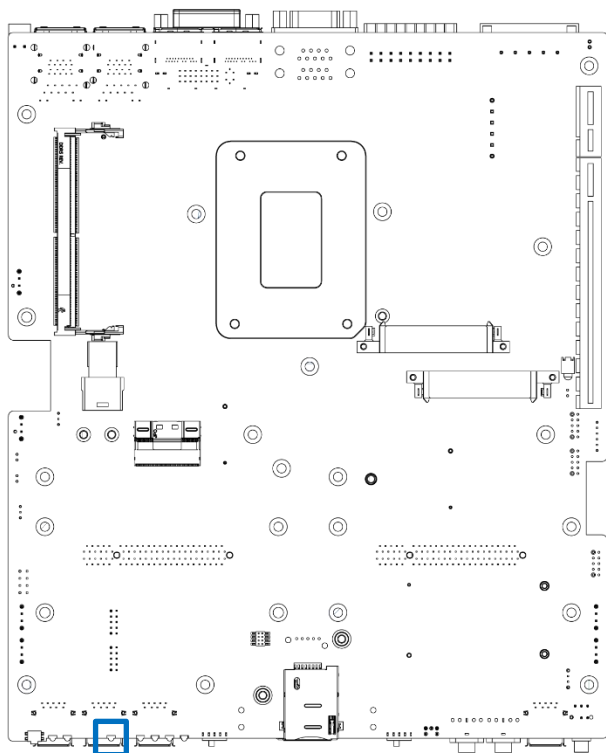

WDT_LED : WDTOUT LED Status

Pin	Definition
1	WDTOUT LED+
2	WDTOUT LED-


2.3.24 Top size SIM Card Socket

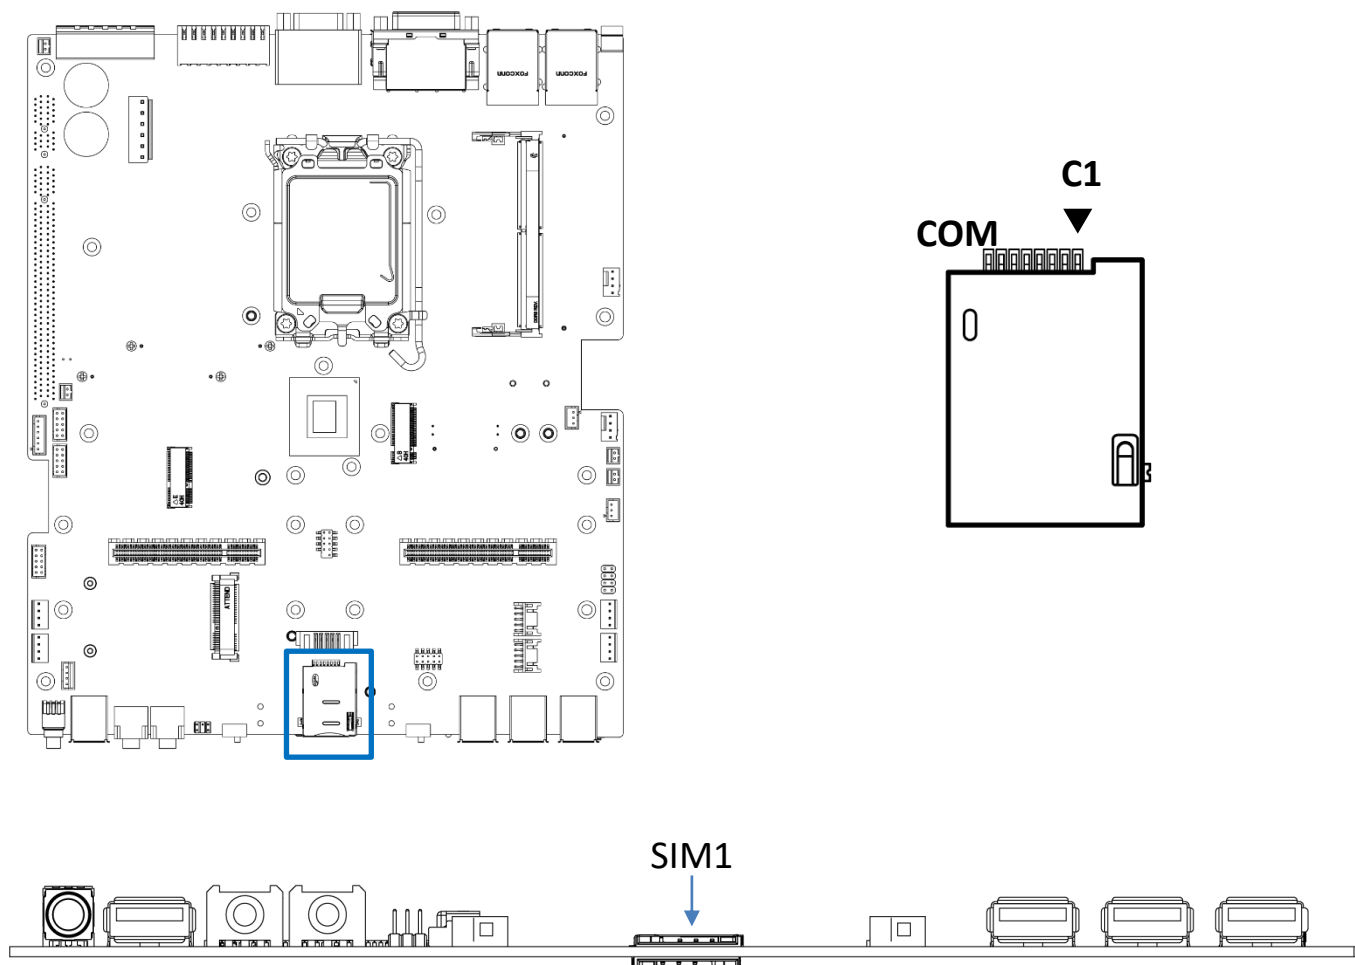

SIM1 (Top size for M.2 B Key)

Pin	Definition	Pin	Definition
C1	UIM_PWR	C6	UIM_VPP
C2	UIM_RESET	C7	UIM_DATA
C3	UIM_CLK	CD	NC
C5	GND	COM	GND



2.3.25 Bottom size SIM Card Socket

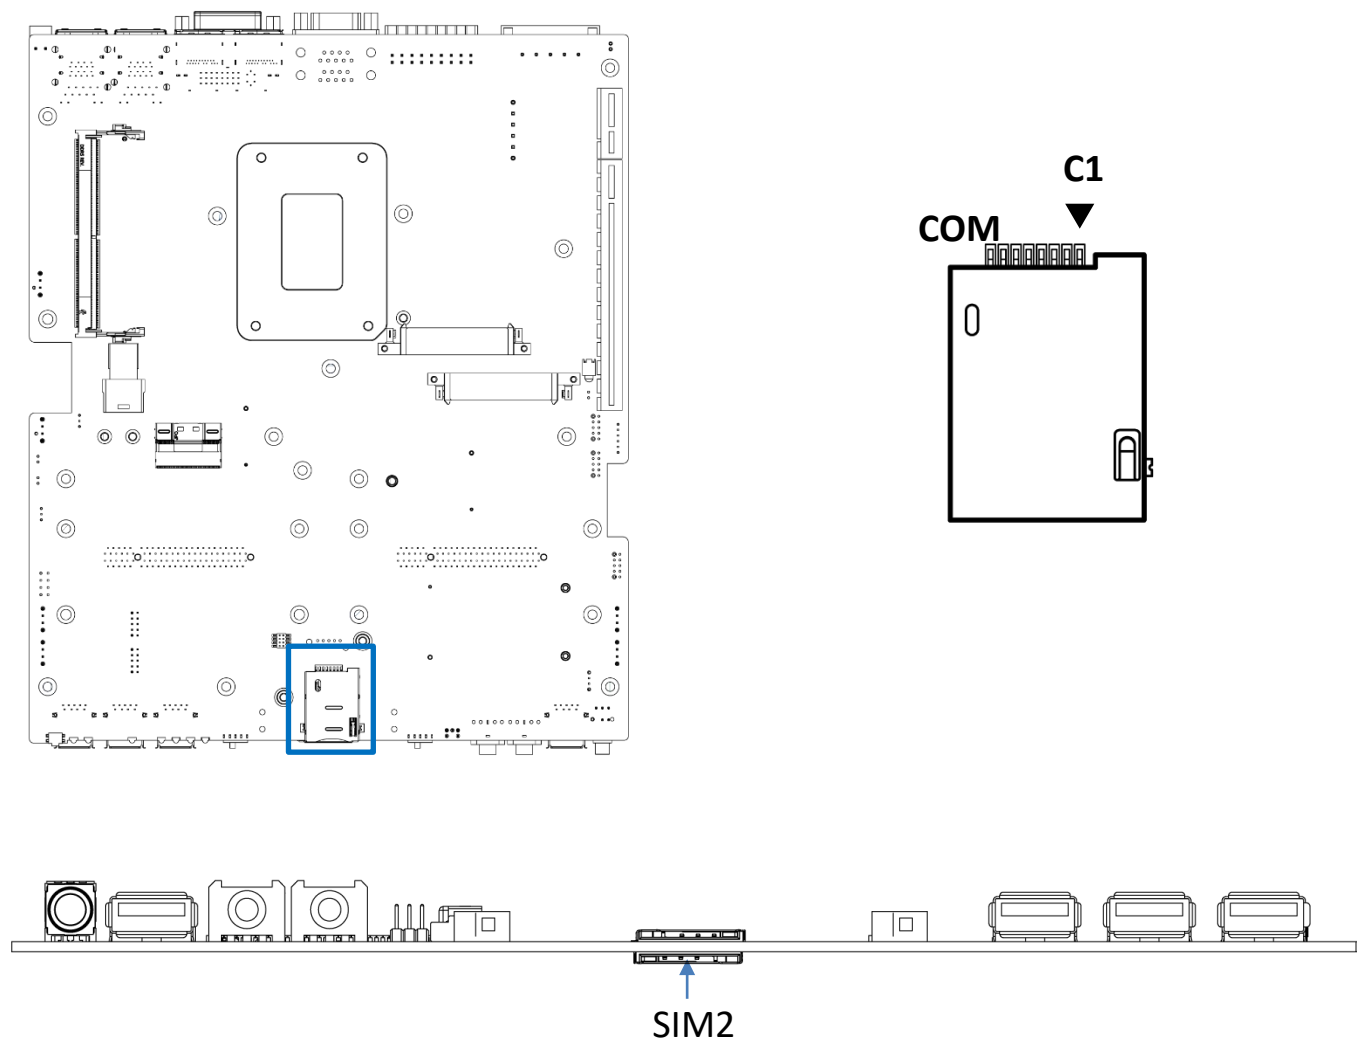

SIM2 (Bottom size for Mini PCIe)

Pin	Definition	Pin	Definition
C1	UIM_PWR	C6	UIM_VPP
C2	UIM_RESET	C7	UIM_DATA
C3	UIM_CLK	CD	NC
C5	GND	COM	GND

2.3.26 Mini PCI-Express / mSATA Socket

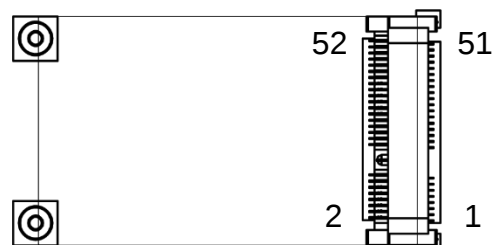
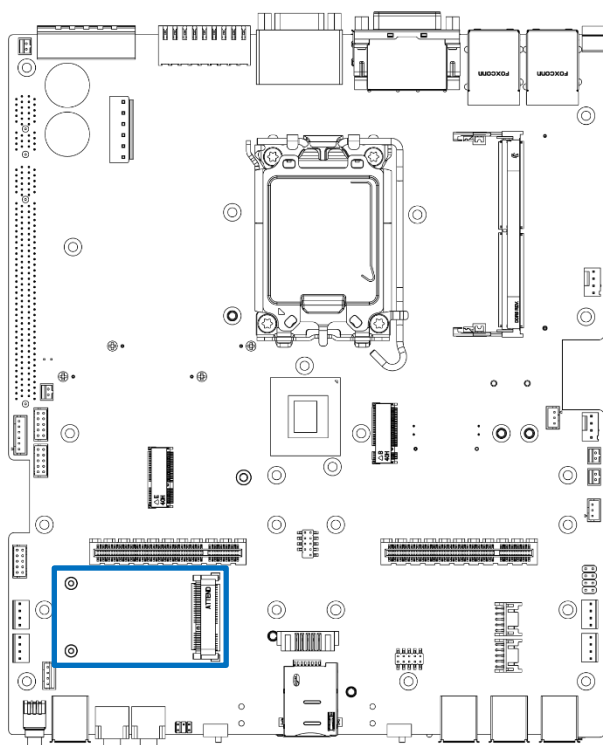


MINIPCI-E

Pin	Definition	Pin	Definition
1	WAKE#	2	+3.3V
3	NC	4	GND
5	NC	6	+1.5V
7	CLKREQ#	8	UIM_PWR
9	GND	10	UIM_DATA
11	REFCLK-	12	UIM_CLK
13	REFCLK+	14	UIM_RST
15	GND	16	UIM_VPP
17	NC	18	GND
19	NC	20	NC
21	GND	22	RESET#
23	RxN	24	+3.3VAUX
25	RxP	26	GND
27	GND	28	+1.5V

Pin	Definition	Pin	Definition
29	GND	30	SMB_CLK
31	TxN	32	SMB_DATA
33	TxP	34	GND
35	GND	36	USB2_D-
37	GND	38	USB2_D+
39	+3.3V	40	GND
41	+3.3V	42	NC
43	GND	44	DEVSLP
45	NC	46	NC
47	NC	48	+1.5V
49	NC	50	GND
51	PCIE_MSATA_SEL	52	+3.3V

2.3.27 M.2 E Key Socket

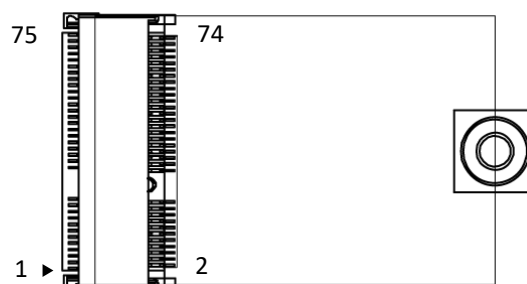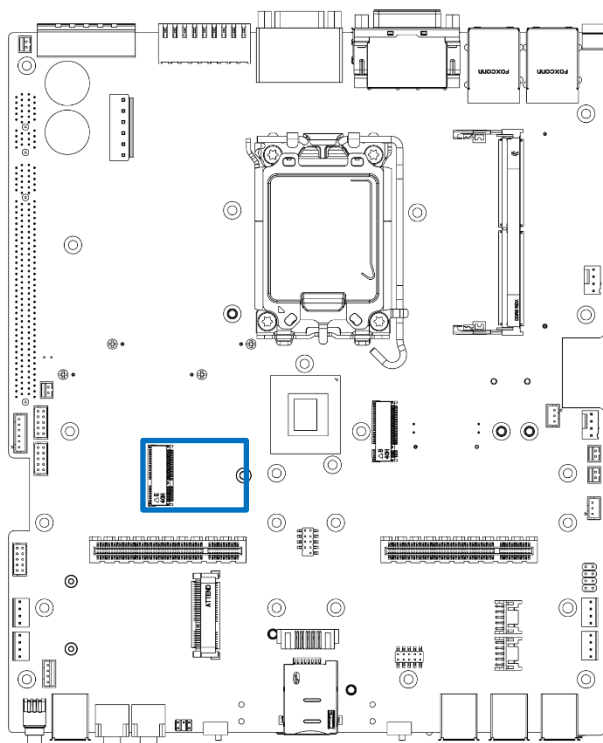


M2_KE

Pin	Definition	Pin	Definition
1	GND	2	+3.3VAUX
3	USB2_D+	4	+3.3VAUX
5	USB2_D-	6	NC
7	GND	8	I2S2_SCLK
9	CNV_WR_1_DN	10	CNV_RF_RESET#
11	CNV_WR_1_DP	12	I2S2_RXD
13	GND	14	MODEM_CLKREQ
15	CNV_WR_0_DN	16	NC
17	CNV_WR_0_DP	18	GND
19	GND	20	UART_WAKE_L
21	CNV_WR_CLK_DN	22	CNV_BRI_RSP
23	CNV_WR_CLK_DP	32	CNV_RGI_DT
33	GND	34	CNV_RGI_RSP
35	TxP0	36	CNV_BRI_DT

Pin	Definition	Pin	Definition
37	TxNO	38	CL_RST#
39	GND	40	CL_DATA
41	RxPO	42	CL_CLK
43	RxNO	44	CNV_PA_BLANKING
45	GND	46	CNV_MFUART2_TXD
47	REFCLK0+	48	CNV_MFUART2_RXD
49	REFCLK0-	50	SUSCLK
51	GND	52	PERST0#
53	NC	54	M2_KEY-E_BT_DIS2#
55	WAKE0#	56	M2_KEY-E_WIFI_DIS1#
57	GND	58	SMBDATAS_DUAL
59	CNV_WT_1_DN	60	SMBCLKS_DUAL
61	CNV_WT_1_DP	62	SMBALERT#
63	GND	64	Pull Low
65	CNV_WT_0_DN	66	PERST1#
67	CNV_WT_0_DP	68	NC
69	GND	70	WAKE1#
71	CNV_WT_CLK_DN	72	+3.3VAUX
73	CNV_WT_CLK_DP	74	+3.3VAUX
75	GND		

2.3.28 M.2 B Key Socket


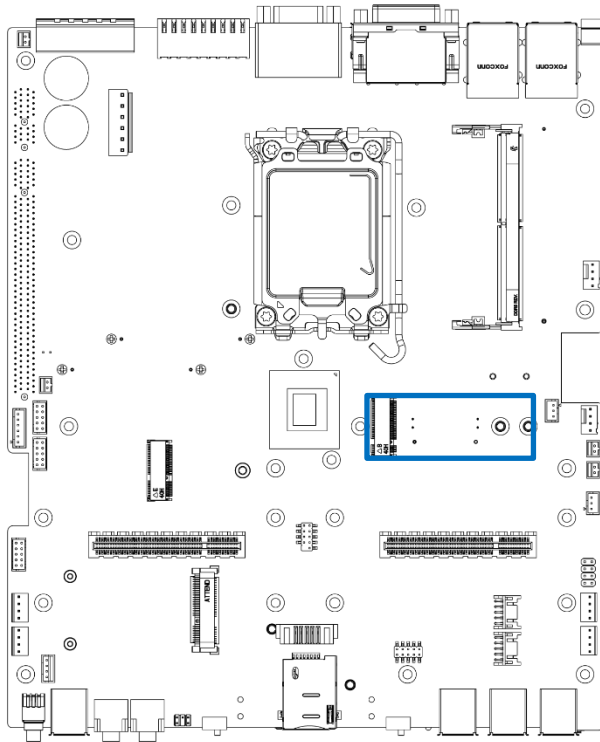


M2_KB

Pin	Definition	Pin	Definition
1	CONFIG_3	2	+3.3V
3	GND	4	+3.3V
5	GND	6	FULL_CARD_POWER_OFF#
7	USB_D+	8	W_DISABLE1#
9	USB_D-	10	WWAN_LED#
11	GND	20	NC
21	CONFIG_0	22	NC
23	GPIO_11(0/1.8V)	24	NC
25	DPR	26	NC
27	GND	28	P_UIM_VPP
29	PERn1/USB3.0-Rx-	30	USIM1_RST
31	PERp1/USB3.0-Rx+	32	USIM1_CLK
33	GND	34	USIM1_DATA
35	PETn1/USB3.0-Tx-	36	USIM1_VDD

Pin	Definition	Pin	Definition
37	PETp1/USB3.0-Tx+	38	NC
39	GND	40	NC
41	PERn0/SATA-B+	42	NC
43	PERp0/SATA-B-	44	NC
45	GND	46	NC
47	PETn0/SATA-A-	48	NC
49	PETp0/SATA-A+	50	PCIE_RST_N
51	GND	52	PCIE_CLKREQ_N
53	PCIE_REFCLK_M	54	PCIE_WAKE_N
55	PCIE_REFCLK_P	56	NC
57	GND	58	NC
59	NC	60	NC
61	NC	62	NC
63	NC	64	NC
65	NC	66	USIM1_DET
67	NC	68	SUSCLK(32kHz)
69	CONFIG_1	70	+3.3VAUX
71	GND	72	+3.3VAUX
73	GND	74	+3.3VAUX
75	CONFIG_2		



2.3.29 PCI-Express x1 Slot

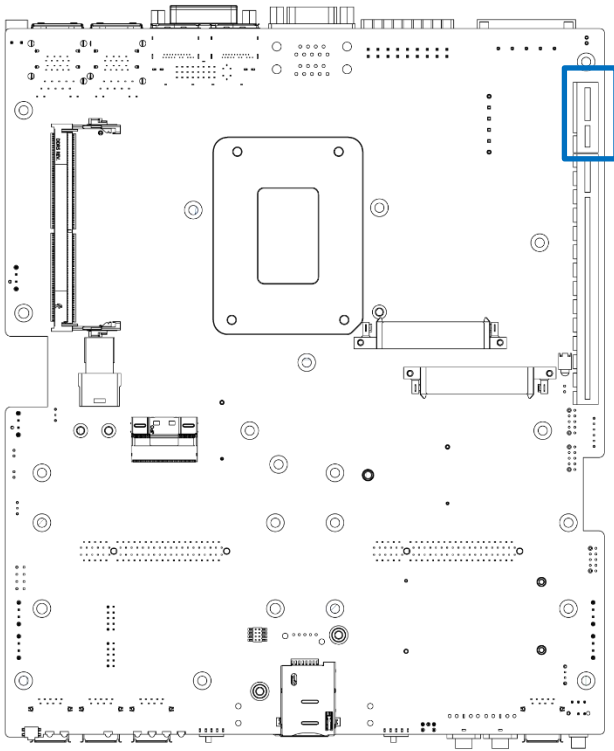

PCIE 2

Pin	Definition	Pin	Definition
B1	+12V	A1	FAN_P4
B2	+12V	A2	+12V
B3	+12V	A3	+12V
B4	GND	A4	GND
B5	SMB_CLK	A5	NC
B6	SMB_DATA	A6	NC
B7	GND	A7	NC
B8	+3.3V	A8	NC
B9	NC	A9	+3.3V
B10	+3.3VAUX	A10	+3.3V
B11	WAKE#	A11	RESET#
B12	FAN_P3	A12	GND
B13	GND	A13	REFCLK+
B14	TxP0	A14	REFCLK-
B15	TxN0	A15	GND
B16	GND	A16	RxP0
B17	FAN_PER	A17	RxN0
B18	GND	A18	GND

2.3.30 PCI-Express x16 Slot

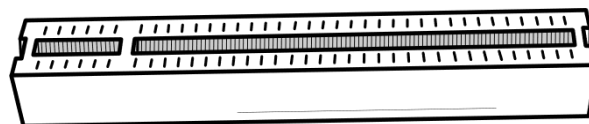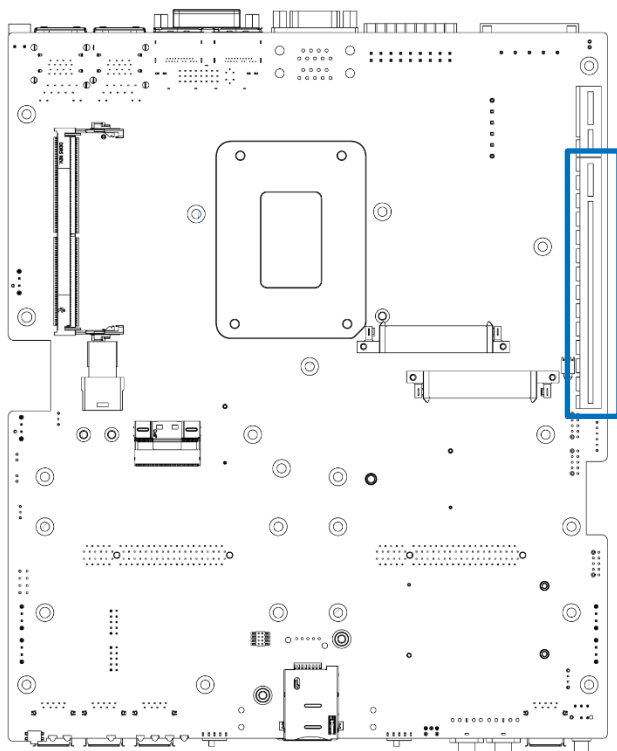

PCIE 1



Pin	Definition	Pin	Definition
B1	+12V	A1	NC
B2	+12V	A2	+12V
B3	+12V	A3	+12V
B4	GND	A4	GND
B5	SMB_CLK	A5	NC
B6	SMB_DATA	A6	NC
B7	GND	A7	NC
B8	+3.3V	A8	NC
B9	NC	A9	+3.3V
B10	+3.3VAUX	A10	+3.3V
B11	WAKE#	A11	RESET#
B12	NC	A12	GND
B13	GND	A13	REFCLK+

Pin	Definition	Pin	Definition
B14	TxP0	A14	REFCLK-
B15	TxN0	A15	GND
B16	GND	A16	RxP0
B17	NC	A17	RxN0
B18	GND	A18	GND
B19	TxP1	A19	NC
B20	TxN1	A20	GND
B21	GND	A21	RxP1
B22	GND	A22	RxN1
B23	TxP2	A23	GND
B24	TxN2	A24	GND
B25	GND	A25	RxP2
B26	GND	A26	RxN2
B27	TxP3	A27	GND
B28	TxN3	A28	GND
B29	GND	A29	RxP3
B30	NC	A30	RxN3
B31	S3	A31	GND
B32	GND	A32	CFG_5
B33	TxP4	A33	CFG_6
B34	TxN4	A34	GND
B35	GND	A35	RxP4
B36	GND	A36	RxN4
B37	TxP5	A37	GND
B38	TxN5	A38	GND

Pin	Definition	Pin	Definition
B39	GND	A39	RxP5
B40	GND	A40	RxN5
B41	TxP6	A41	GND
B42	TxN6	A42	GND
B43	GND	A43	RxP6
B44	GND	A44	RxN6
B45	TxP7	A45	GND
B46	TxN7	A46	GND
B47	GND	A47	RxP7
B48	NC	A48	RxN7
B49	GND	A49	GND
B50	TxP8	A50	NC
B51	TxN8	A51	GND
B52	GND	A52	RxP8
B53	GND	A53	RxN8
B54	TxP9	A54	GND
B55	TxN9	A55	GND
B56	GND	A56	RxP9
B57	GND	A57	RxN9
B58	TxP10	A58	GND
B59	TxN10	A59	GND
B60	GND	A60	RxP10
B61	GND	A61	RxN10
B62	TxP11	A62	GND
B63	TxN11	A63	GND

Pin	Definition	Pin	Definition
B64	GND	A64	RxP11
B65	GND	A65	RxN11
B66	TxP12	A66	GND
B67	TxN12	A67	GND
B68	GND	A68	RxP12
B69	GND	A69	RxN12
B70	TxP13	A70	GND
B71	TxN13	A71	GND
B72	GND	A72	RxP13
B73	GND	A73	RxN13
B74	TxP14	A74	GND
B75	TxN14	A75	GND
B76	GND	A76	RxP14
B77	GND	A77	RxN14
B78	TxP15	A78	GND
B79	TxN15	A79	GND
B80	GND	A80	RxP15
B81	NC	A81	RxN15
B82	NC	A82	GND

2.3.31 PCI-Express x8 Slot

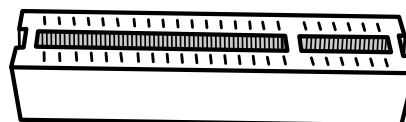
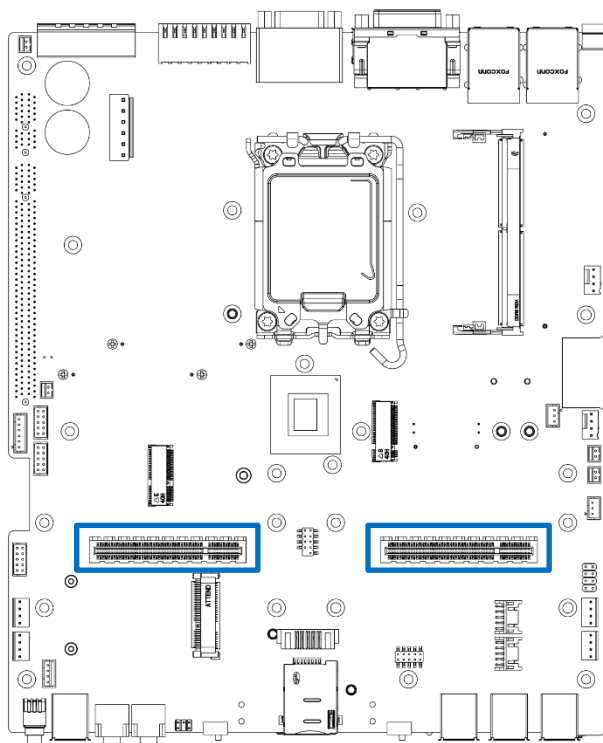


PCIE (LAN_L , LAN_R)

Pin	Definition	Pin	Definition
B1	+12V	A1	NC
B2	+12V	A2	+12V
B3	+12V	A3	+12V
B4	GND	A4	GND
B5	SMB_CLK	A5	NC
B6	SMB_DATA	A6	NC
B7	GND	A7	NC
B8	+3.3V	A8	NC
B9	NC	A9	+3.3V
B10	+3.3VAUX	A10	+3.3V
B11	WAKE#	A11	RESET#
B12	NC	A12	GND
B13	GND	A13	REFCLK+
B14	TxP0	A14	REFCLK-
B15	TxN0	A15	GND

Pin	Definition	Pin	Definition
B16	GND	A16	RxP0
B17	NC	A17	RxN0
B18	GND	A18	GND
B19	TxP1	A19	NC
B20	TxN1	A20	GND
B21	GND	A21	RxP1
B22	GND	A22	RxN1
B23	TxP2	A23	GND
B24	TxN2	A24	GND
B25	GND	A25	RxP2
B26	GND	A26	RxN2
B27	TxP3	A27	GND
B28	TxN3	A28	GND
B29	GND	A29	RxP3
B30	NC	A30	RxN3
B31	NC	A31	GND
B32	GND	A32	NC
B33	9_48VSB_IN	A33	9_48VSB_IN
B34	9_48VSB_IN	A34	9_48VSB_IN
B35	9_48VSB_IN	A35	9_48VSB_IN
B36	9_48VSB_IN	A36	9_48VSB_IN
B37	9_48VSB_IN	A37	9_48VSB_IN
B38	9_48VSB_IN	A38	9_48VSB_IN
B39	9_48VSB_IN	A39	9_48VSB_IN
B40	9_48VSB_IN	A40	9_48VSB_IN
B41	9_48VSB_IN	A41	9_48VSB_IN
B42	9_48VSB_IN	A42	9_48VSB_IN
B43	+3.3VAUX	A43	+5V
B44	+3.3VAUX	A44	+5V
B45	+3.3VAUX	A45	+1.5V
B46	+3.3VAUX	A46	+1.5V
B47	+1.0VAUX	A47	+1.0VAUX
B48	+1.0VAUX	A48	+1.0VAUX
B49	NC	A49	NC



2.3.32 SATA with Power Connector

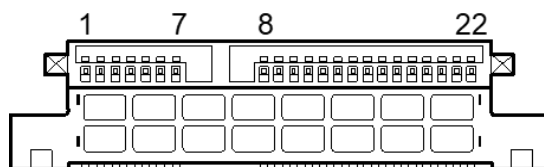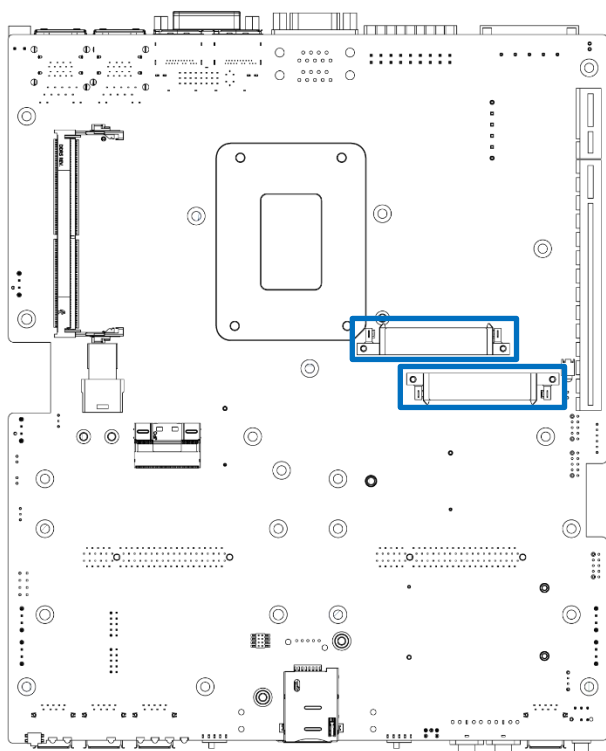

SATA 1, SATA 2



Pin	Definition
1	GND
2	TxP
3	TxN
4	GND
5	RxN
6	RxP
7	GND
8	NC
9	NC
10	DEVSLP
11	GND

Pin	Definition
12	GND
13	GND
14	+5V
15	+5V
16	+5V
17	GND
18	GND
19	GND
20	+12V
21	+12V
22	+12V

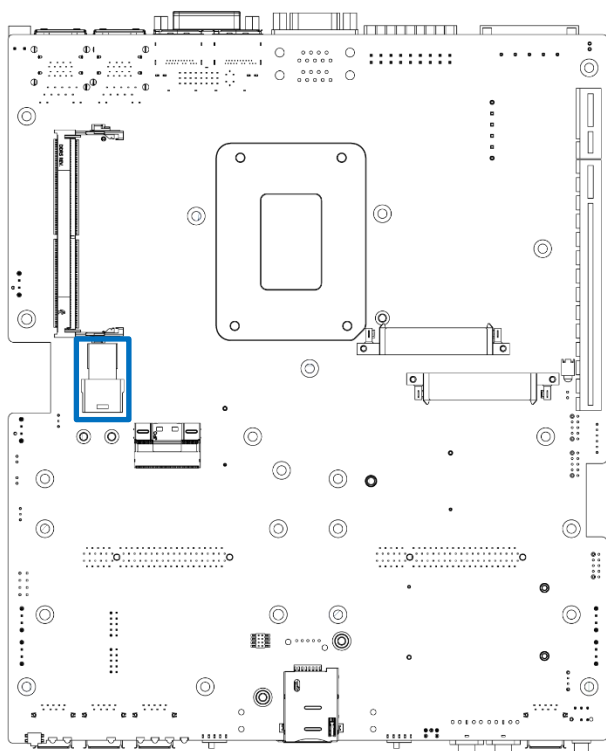

SATA 3

Pin	Definition	Pin	Definition	Pin	Definition	Pin	Definition
A1	NC	B1	NC	C1	NC	D1	NC
A2	NC	B2	NC	C2	NC	D2	NC
A3	GND	B3	GND	C3	GND	D3	GND
A4	RxP1	B4	RxP0	C4	TxP1	D4	TxP0
A5	RxN1	B5	RxN0	C5	TxN1	D5	TxN0
A6	GND	B6	GND	C6	GND	D6	GND
A7	RxP3	B7	RxP2	C7	TxP3	D7	TxP2
A8	RxN3	B8	RxN2	C8	TxN3	D8	TxN2
A9	GND	B9	GND	C9	GND	D9	GND

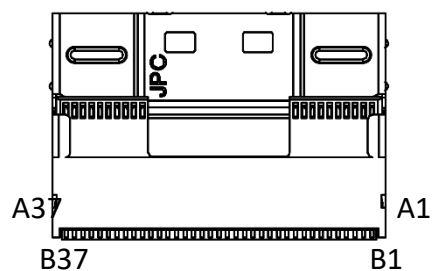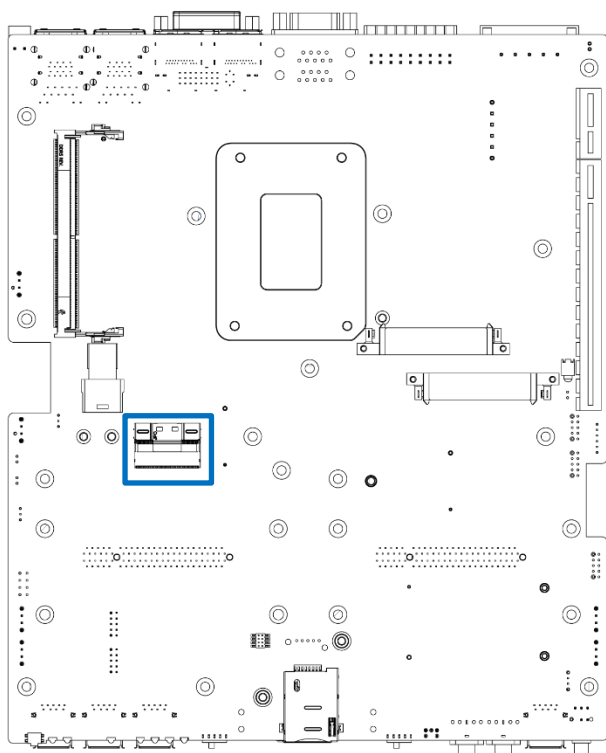

SL 1 Slimline PCIe x8

Pin	Definition	Pin	Definition
B1	GND	A1	GND
B2	TxP0	A2	RxP0
B3	TxN0	A3	RxN0
B4	GND	A4	GND
B5	TxP1	A5	RxP1
B6	TxN1	A6	RxN1
B7	GND	A7	GND
B8	RST#1	A8	CLKP1
B9	RST#2	A9	CLKN1
B10	GND	A10	GND
B11	RST#3	A11	CLKP2
B12	RST#4	A12	CLKN2
B13	GND	A13	GND
B14	TxP2	A14	RxP2
B15	TxN2	A15	RxN2

Pin	Definition	Pin	Definition
B16	GND	A16	GND
B17	TxP3	A17	RxP3
B18	TxN3	A18	RxN3
B19	GND	A19	GND
B20	TxP4	A20	RxP4
B21	TxN4	A21	RxN4
B22	GND	A22	GND
B23	TxP5	A23	RxP5
B24	TxN5	A24	RxN5
B25	GND	A25	GND
B26	PRSNT#1	A26	CLKP3
B27	PRSNT#2	A27	CLKN3
B28	GND	A28	GND
B29	RST#3	A29	CLKP4
B30	PRSNT#4	A30	CLKN4
B31	GND	A31	GND
B32	TxP6	A32	RxP6
B33	TxN6	A33	RxN6
B34	GND	A34	GND
B35	TxP7	A35	RxP7
B36	TxN7	A36	RxN7
B37	GND	A37	GND

Chapter 3

System Setup

3.1 Set torque force to 3.5 kgf-cm to screw or unscrew system parts.

3.2 Separating the expansion module from main computer module.



WARNING

To ensure safety and prevent system damage, before disassembly, please switch off the system and disconnect the unit from its power source.



- RCO-6000-ADL
- RCO-6000-ADL-2E16-4B7M
- RCO-6000-ADL-2E16-2B15M
- RCO-6000-ADL-2E16-2N15M
- RCO-6000-ADL-2E16
- RCO-6000-ADL-2E16-2PWR

- RCO-6000-ADL-4NH
- RCO-6000-ADL-4NS
- RCO-6000-ADL-8NS

1. Remove the 3 screws on the left and right side of the system as highlighted in the pictures below.



2. Remove 5 screws located at the front and back of the system as pictured below. The screw locations are highlighted in red.



3. After removing all screws, the expansion module (left) can be separated from the main computer module (right) as pictured below.



3.3 Removing chassis top external cover

1. Place the system faced upside down and unscrew the four screws (M3x5L) located at the red circles highlighted below.



2. Hold the body of the system and remove from the external cover in an upward motion away from the external cover as pictured below.




3. Pictured below is the separated system body (left) and external cover (right).




3.4 Installing CPU



1. Remove the CPU protective cover.

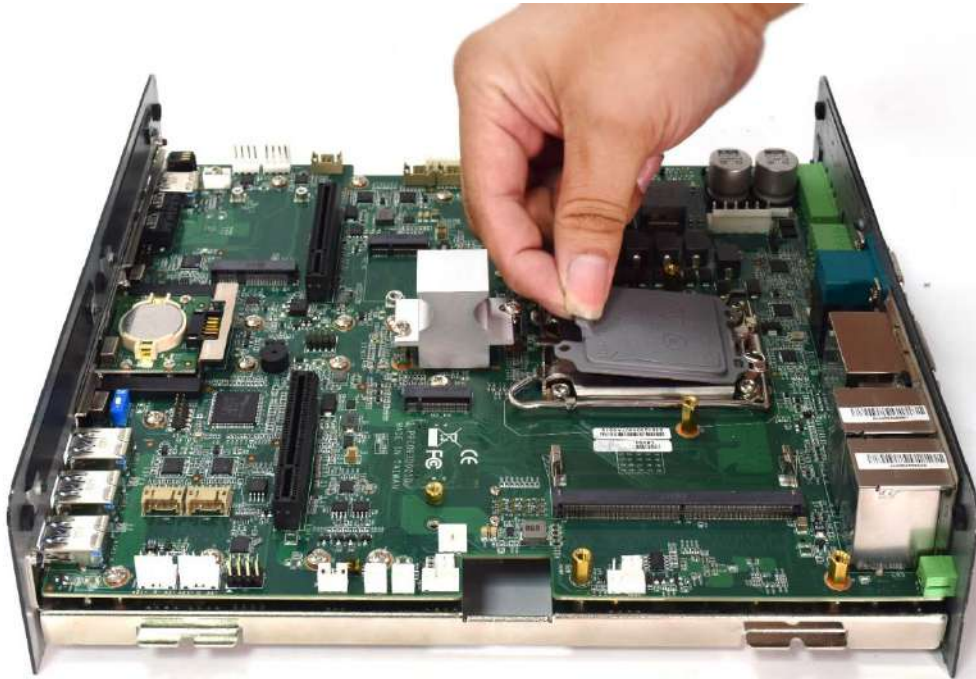


2. Press down on the lever in order to release the socket, as shown below.

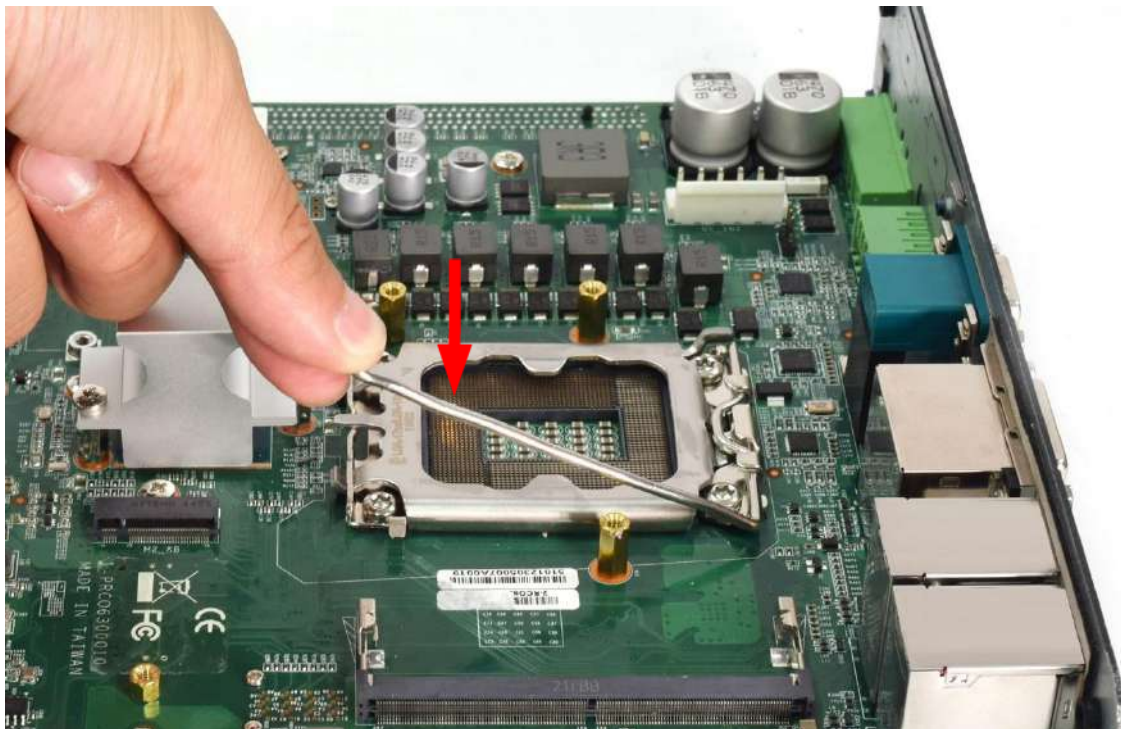

Hold the CPU by its edges, and carefully align the notches on the CPU with the notches on the socket indicated by the red circles in the pictures below. Gently lower the CPU into the socket without applying force.

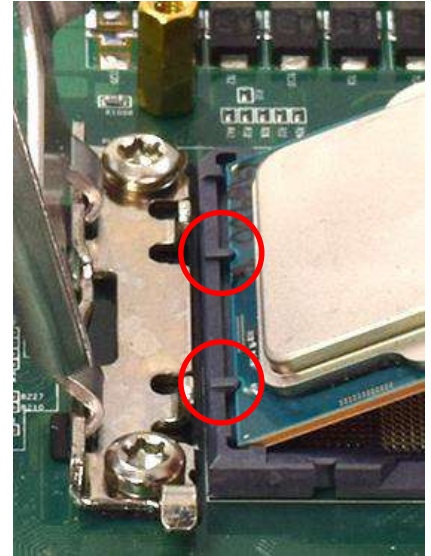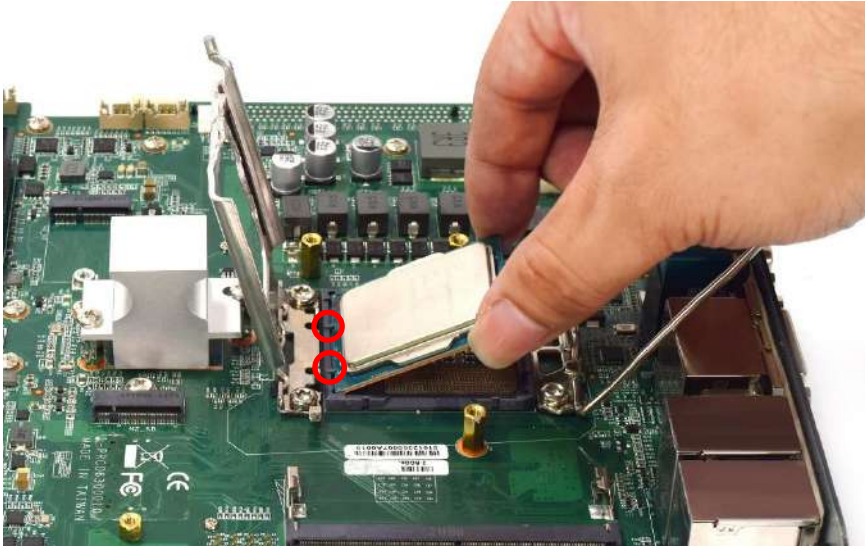

3. Once the CPU has been placed, press down on the lever again to secure the socket. The outcome should look like the photo below.

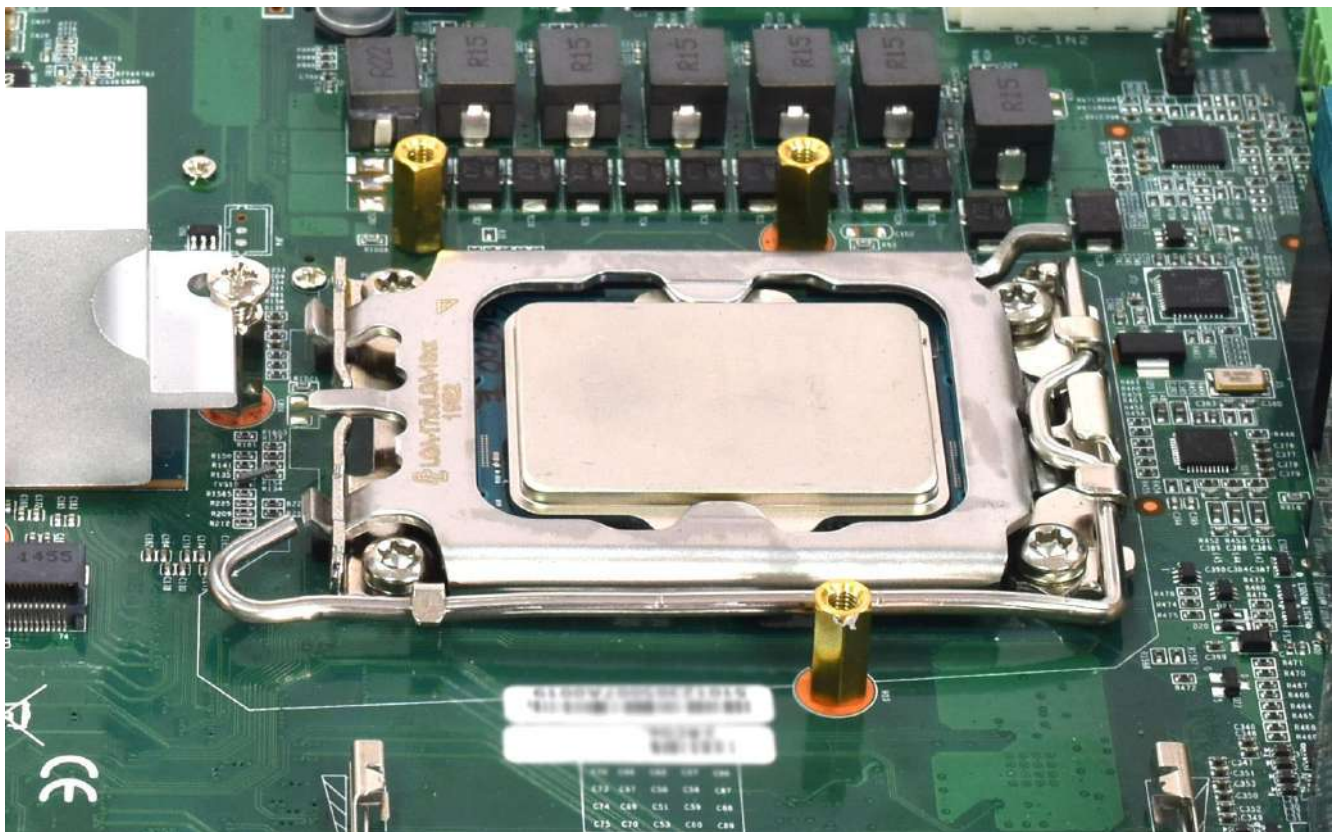

3.5 Installing SODIMM


1. The RCO-6000 has two SODIMM slots on the front and rear side of the board. Pictured below is the front side of the board.



2. Insert the memory module at a 45 degree angle.




3. Gently push the memory module down against the board until you hear a “click” sound. Make sure the memory module is secured.

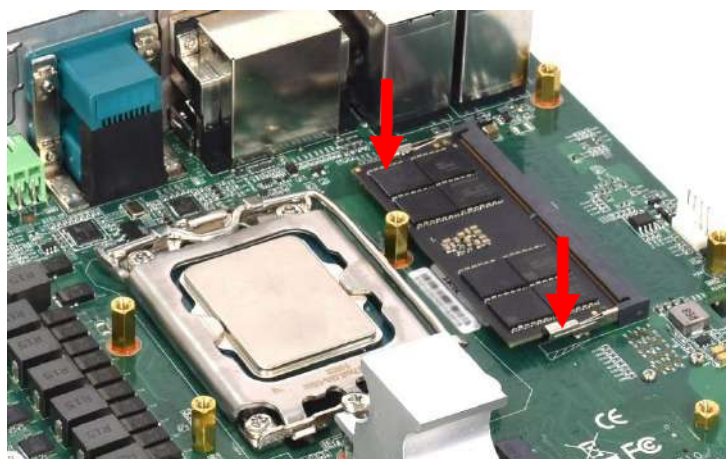


4. Pictured below is the SODIMM slot on the rear side of the board.



5. Insert memory module at a 45 degree angle.

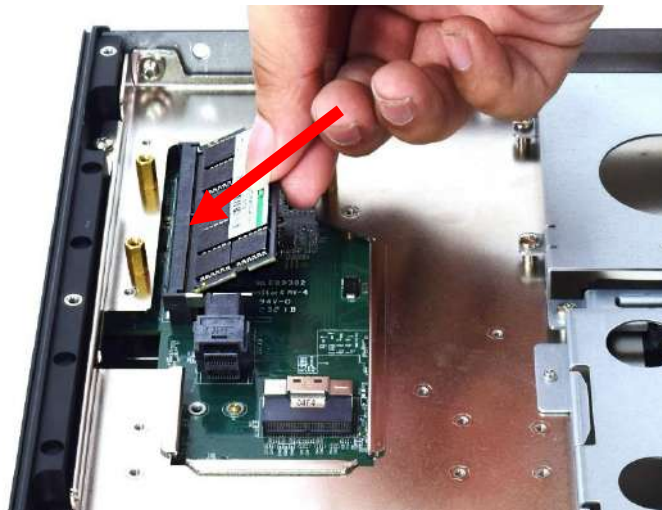

6. Gently push the memory module down against the board until you hear a “click” sound. Make sure the memory module is secure.

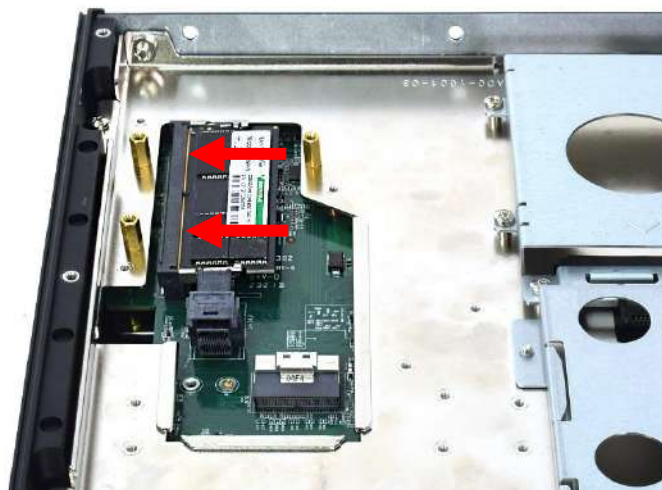

3.6 Installing CPU & SODIMM heat block


1. Paste the thermal pad on the CPU.



2. Place the designated heat block onto the CPU with thermal pad.




3. Secure the heat block with two screws (M3x5L). The screwdriver can go through the holes on top to fasten the screws below.

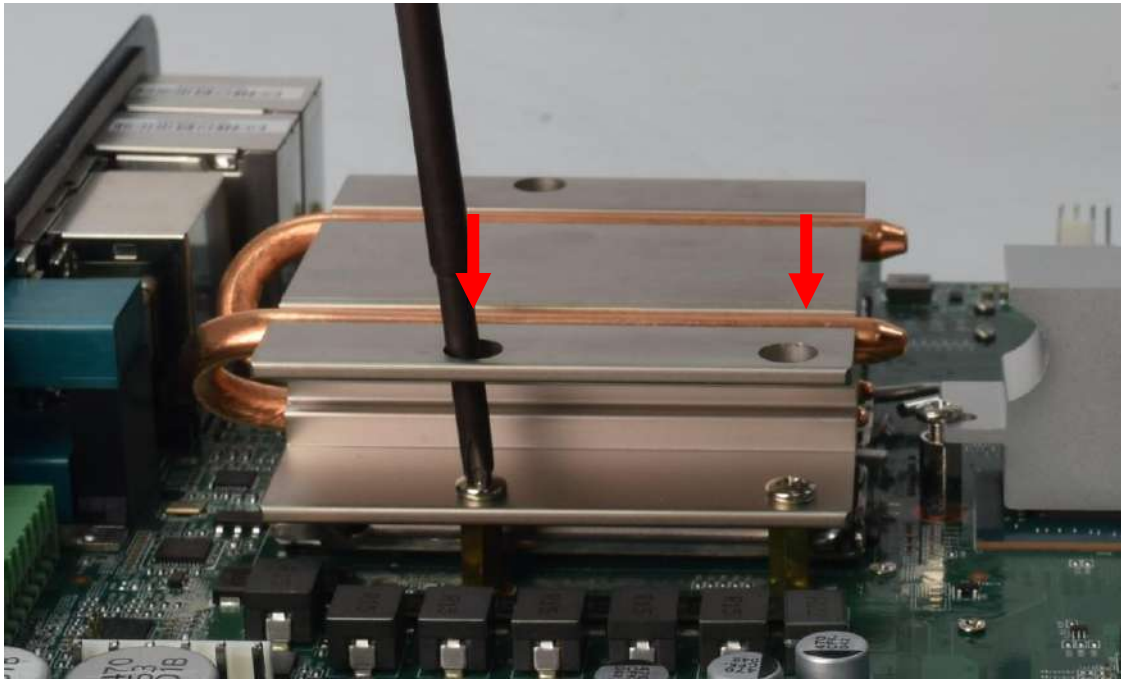


4. Paste the thermal pad on the DRAM.




5. Place the designated heat block onto the DRAM with thermal pad.

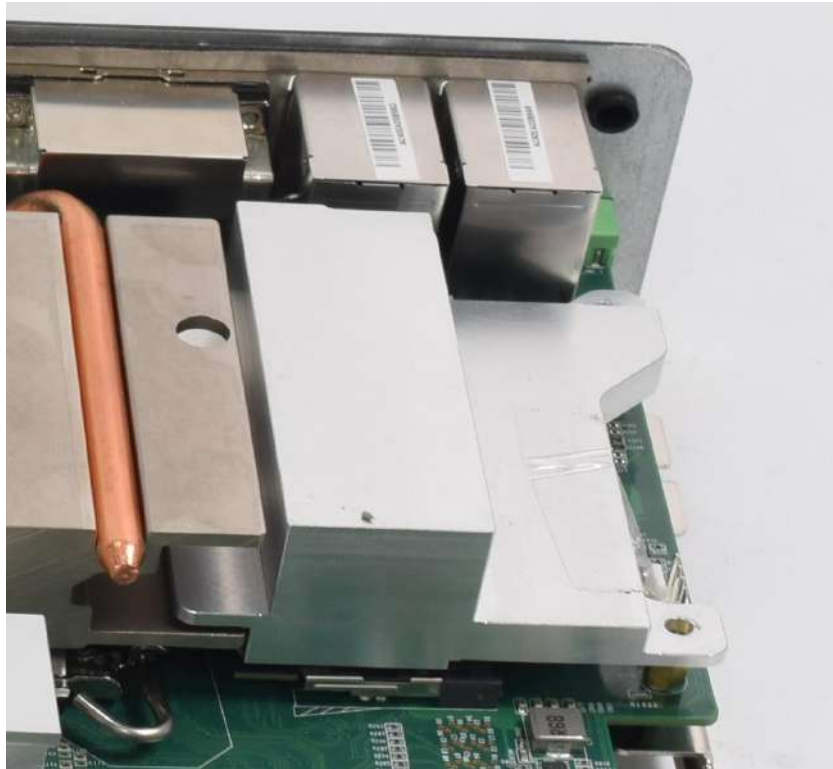

6. Secure the heat block with one screw (M3x8L). The screwdriver can go through the hole on the top to fasten the screw below.

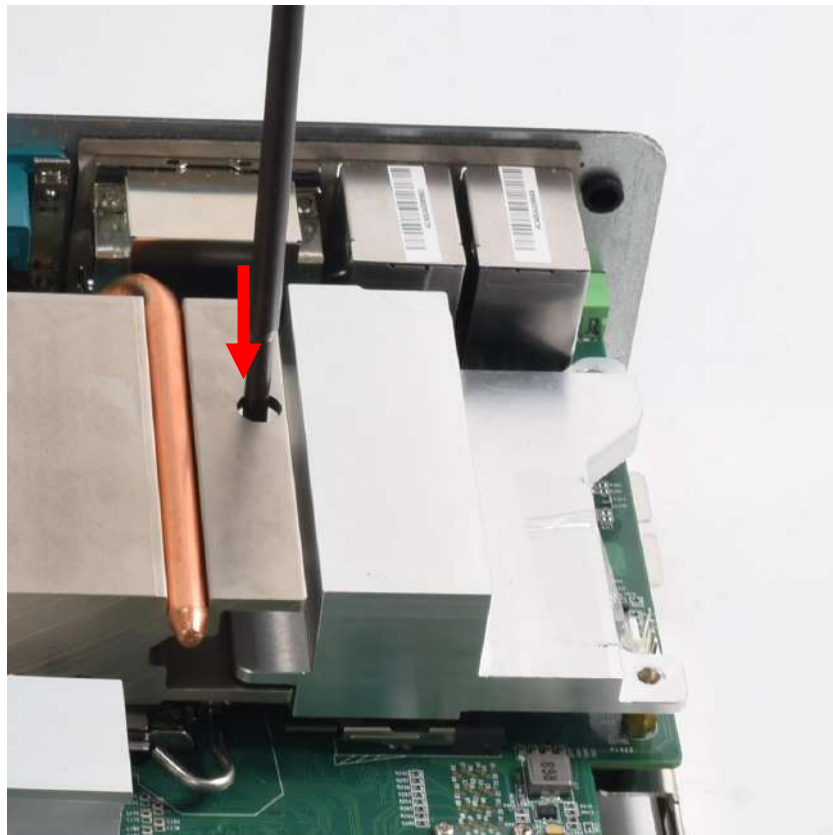

7. Secure the heat block with two screws (M3x5L). The screwdriver can go through the holes on top in order to fasten the screws below.

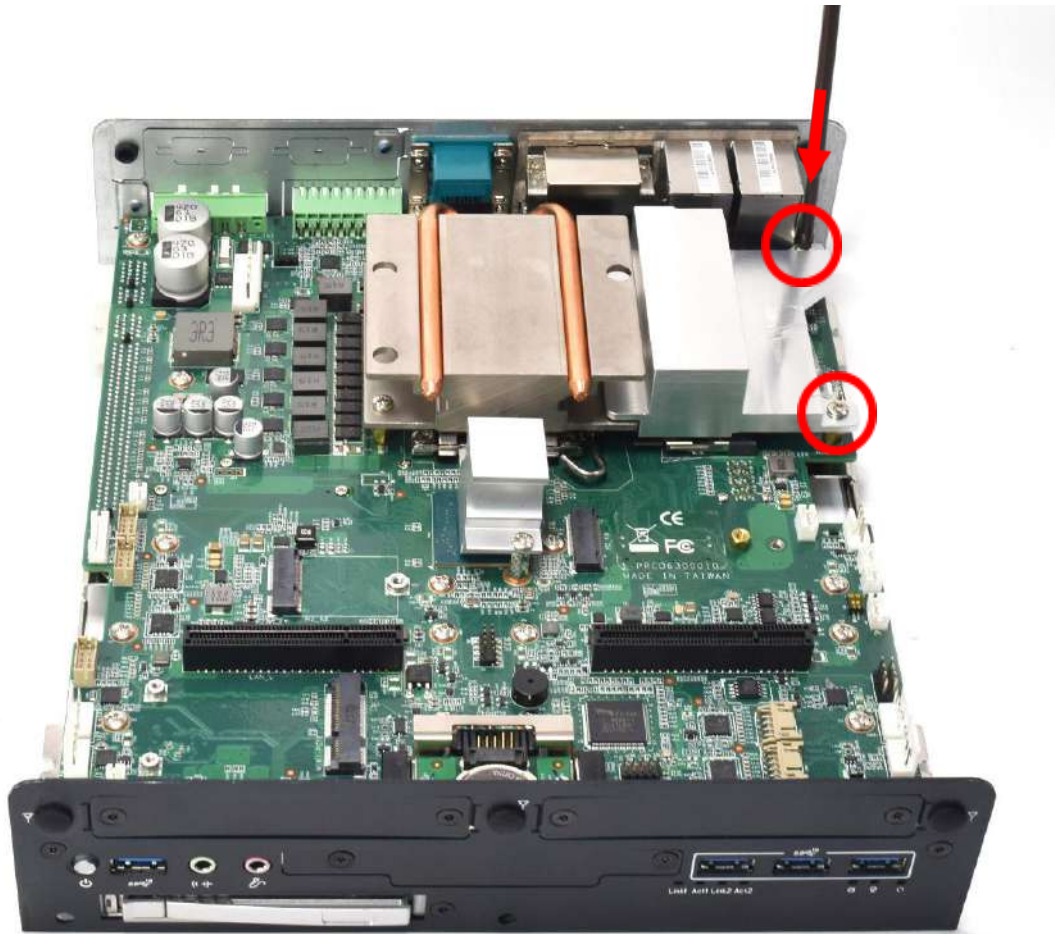


8. Paste the thermal pad onto the installed DRAM heat block.




9. Paste the thermal pad onto the installed CPU heat block.




10. Paste the thermal pad onto the PCH heat block.

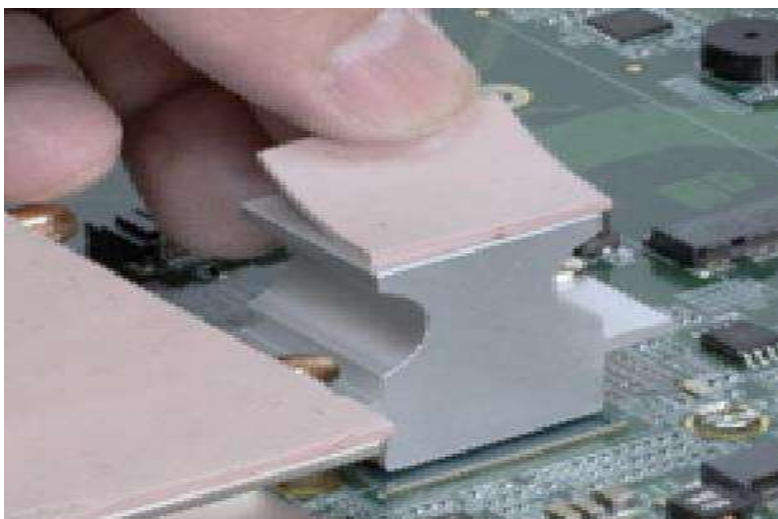


11. Paste thermal pad on the DRAM. (Pictured below is the SODIMM slot on the rear side of the board.)

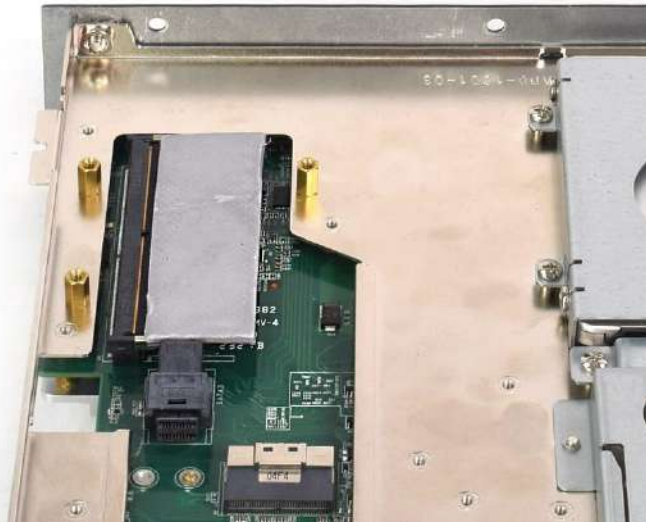

12. Lock the heat block with three screws (M3x5L). The screwdriver can go through the holes on the top to fasten the screws with a copper stud.

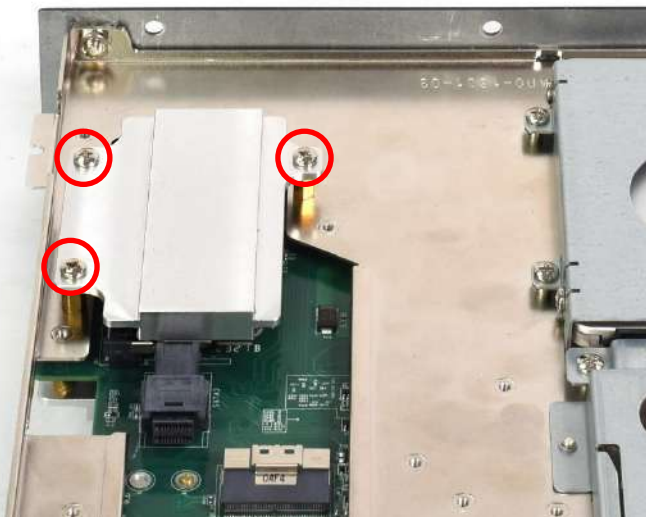


13. Paste the thermal pad onto the installed DRAM heat block.

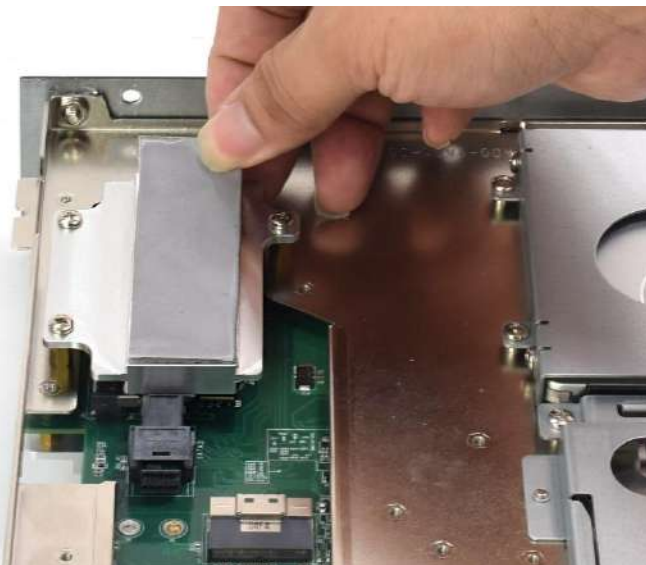


3.7 Installing M.2 SSD card

RCO-6000-ADL series PCBA has an M.2 KB slot on the top, M2_B Key currently supports SSD application

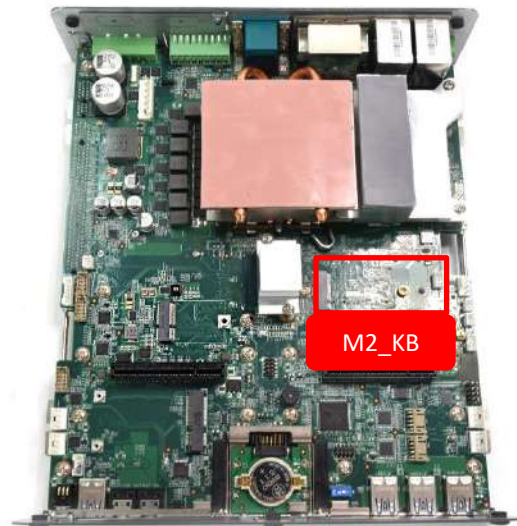

1. Insert Mini PCIe card at a 45 degree angle.

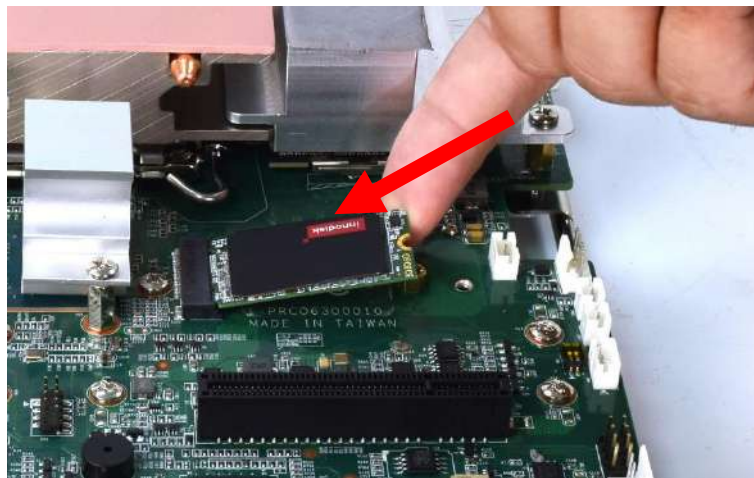


2. Gently press the Mini PCIe card down against the board and secure it with one screw (M3x5L).




3.8 Installing WiFi Module

RCO-6000-ADL series PCBA has an M.2 KE slot on the top, M2_E Key currently supports WiFi application


1. Insert M.2 E Key card at 45 degree angle.

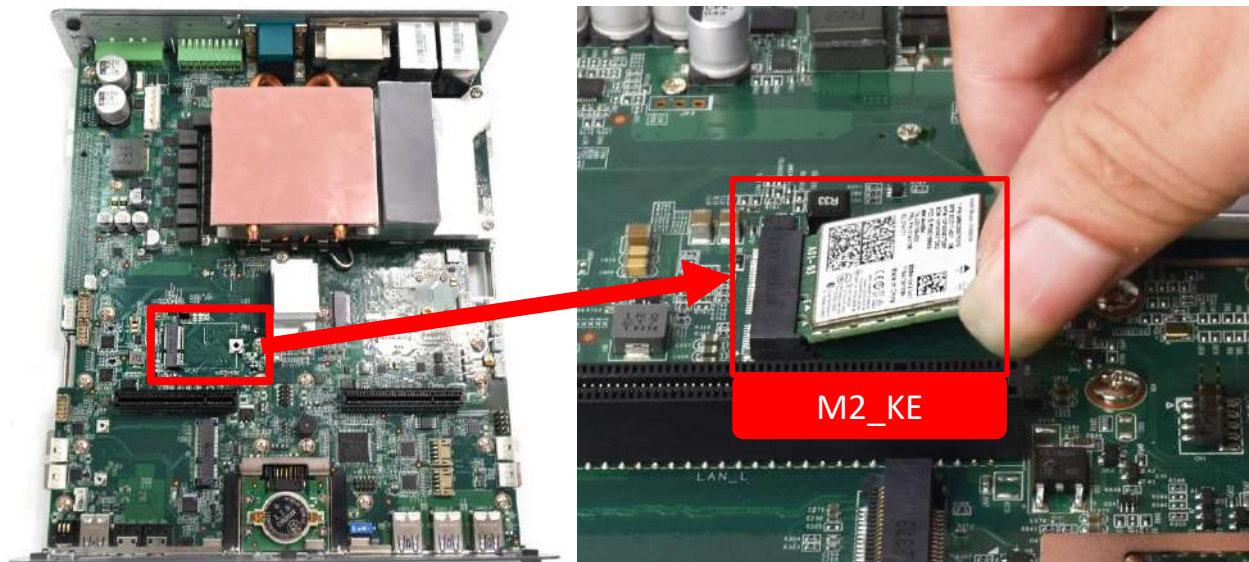

2. Press the M.2 E Key card down and secure it with one screw (M3x5L).

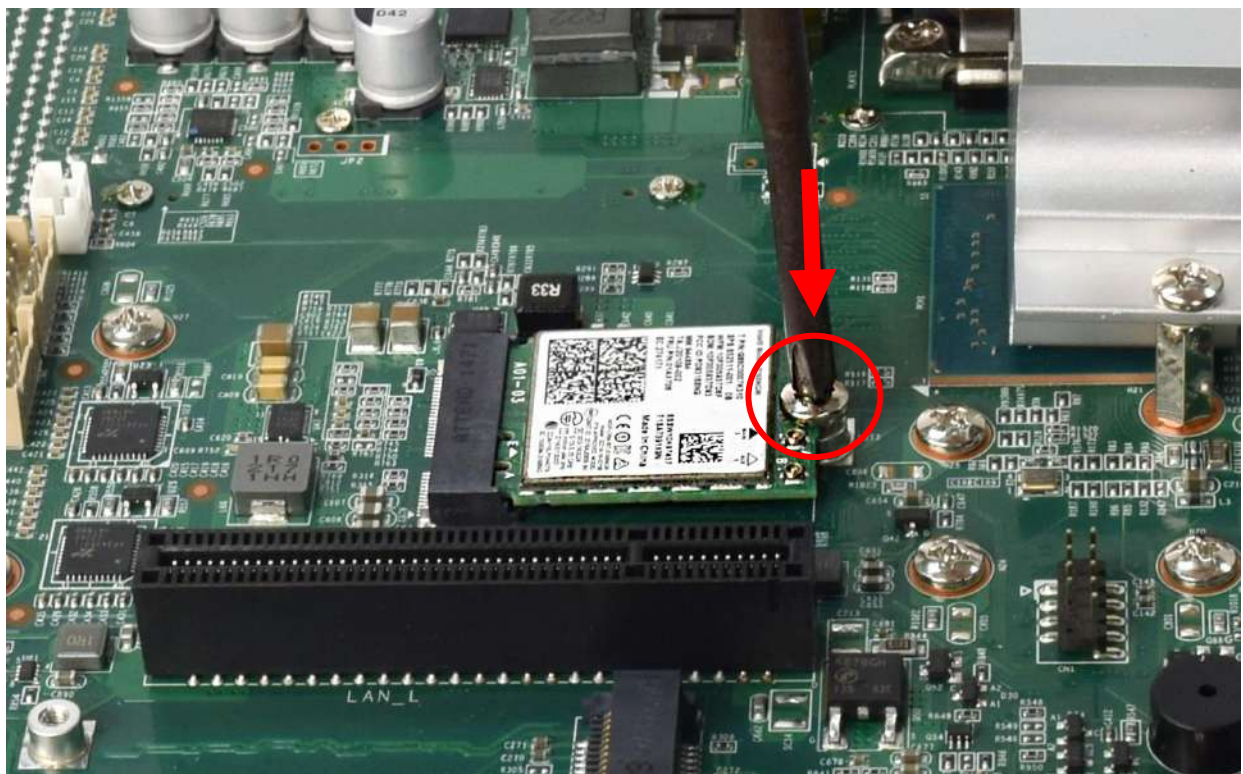

3. The RCO-6000-ADL Series system has 5 antenna holes, 2 are located on the rear panel and 3 are located on the front panel as pictured below.

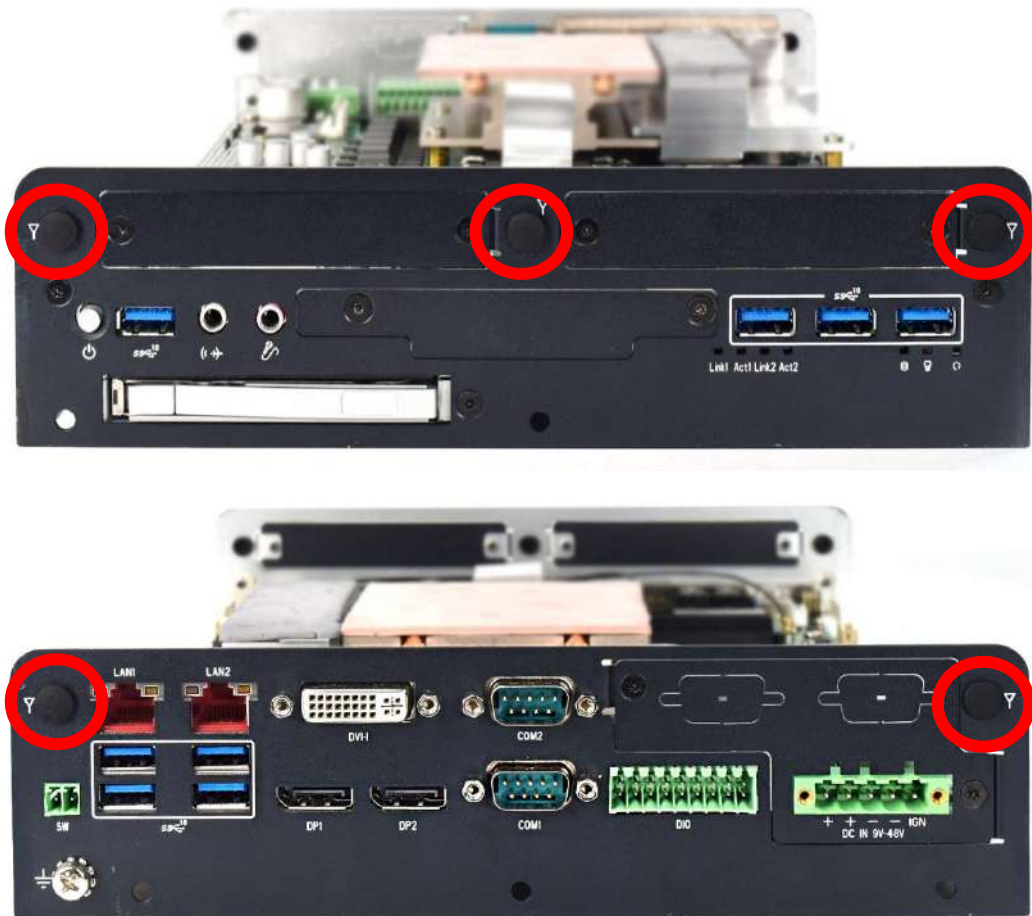

4. Install the SMA female jack through the antenna holes, and then fasten on the SMA male plug.



5. Assemble the antenna and SMA jack together, the outcome should look like the picture below.



6. Fix the end of the cable of the Wireless RF connector onto the communication module as shown in the picture below.



3.9 Installing Mini PCIe card / 4G LTE

The RCO-6000-ADL Series PCBA has Mini PCIe slots on the top. It currently supports 4G LTE applications.



1. Insert Mini PCIe card at a 45 degree angle.



2. Gently press the Mini PCIe card against the board and secure it with two screws (M2x3.7L).



3.10 Installing Antenna

1. Remove antenna hole cover on the system panel as indicated by the red circles in the photo below.




2. Install the SMA female jack through the antenna holes, and then fasten on the SMA male plug as shown below.



3. Assemble the antennas and onto the SMA jack, the outcome should look like the photo below.




4. Fix the end of the cable of the Wireless RF connector onto the communication module as shown below.

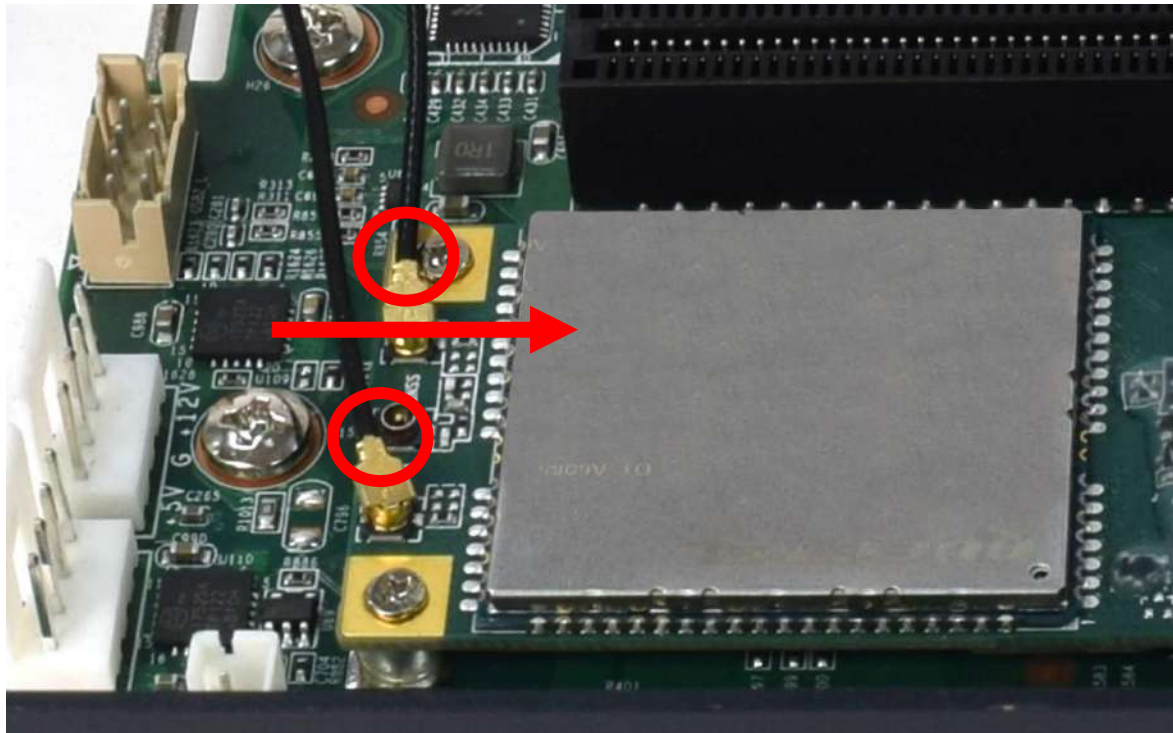


3.11 Install HDD/SSD on the internal SATA bay


1. One internal SATA HDD/SSD bay is available for RCO-6000-ADL Series.
Unscrew the 4 screws (M3x5L) highlighted at the locations below in order to remove the SATA HDD/SSD bay.

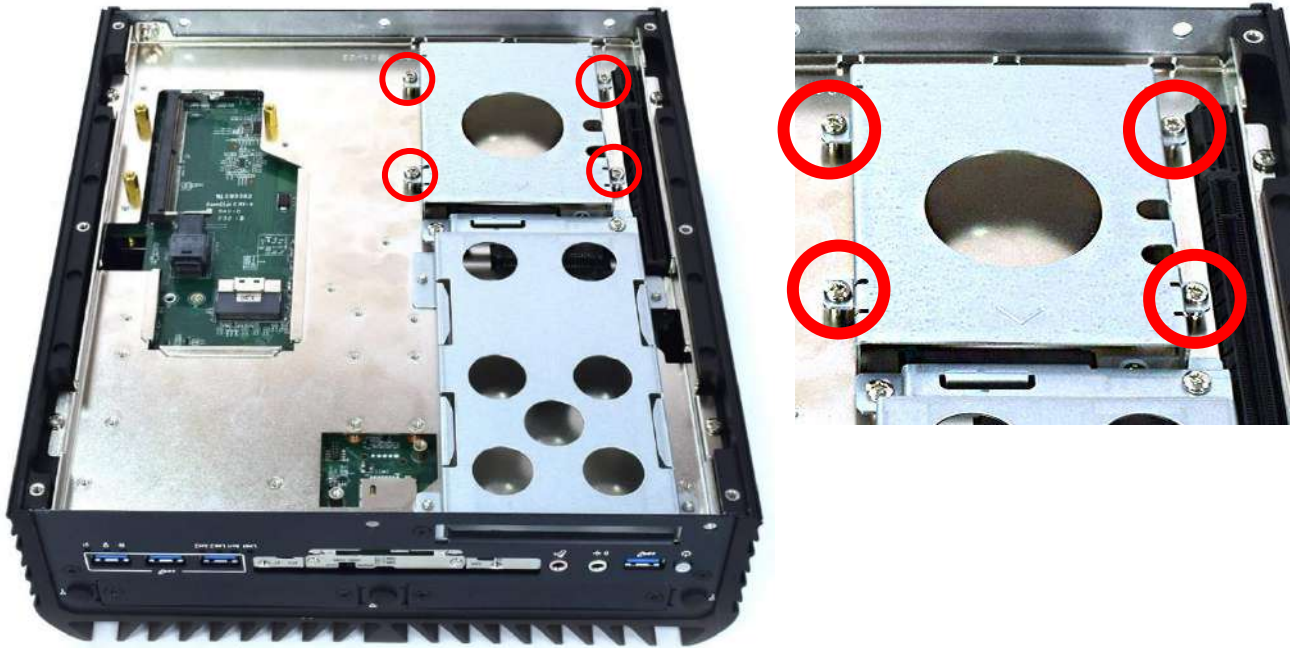


2. Secure the 2.5" HDD with HDD/SSD bracket using four screws (M3x4L).

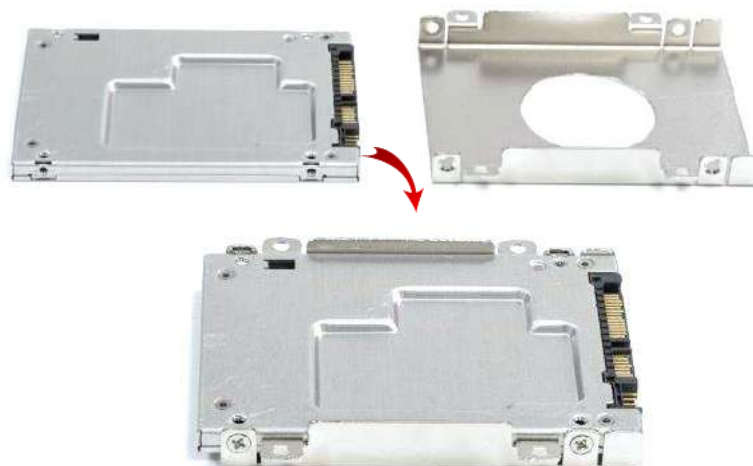

3. Install the HDD/SSD bracket by aligning the holes with the notches on the board as shown in the picture below.

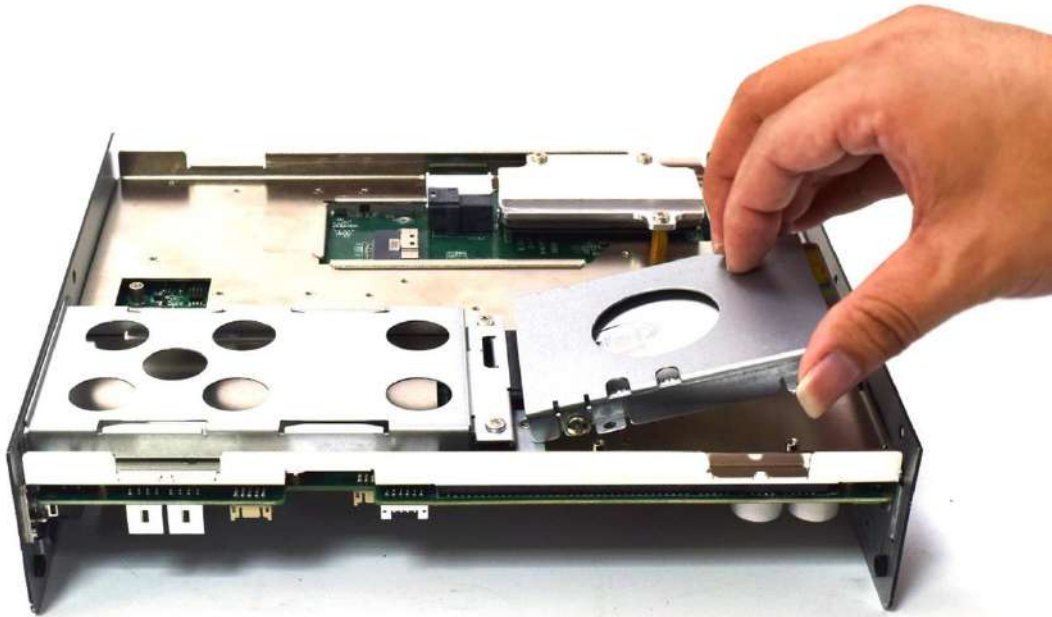

4. Fasten the 4 screws to secure the internal HDD/SSD bracket.

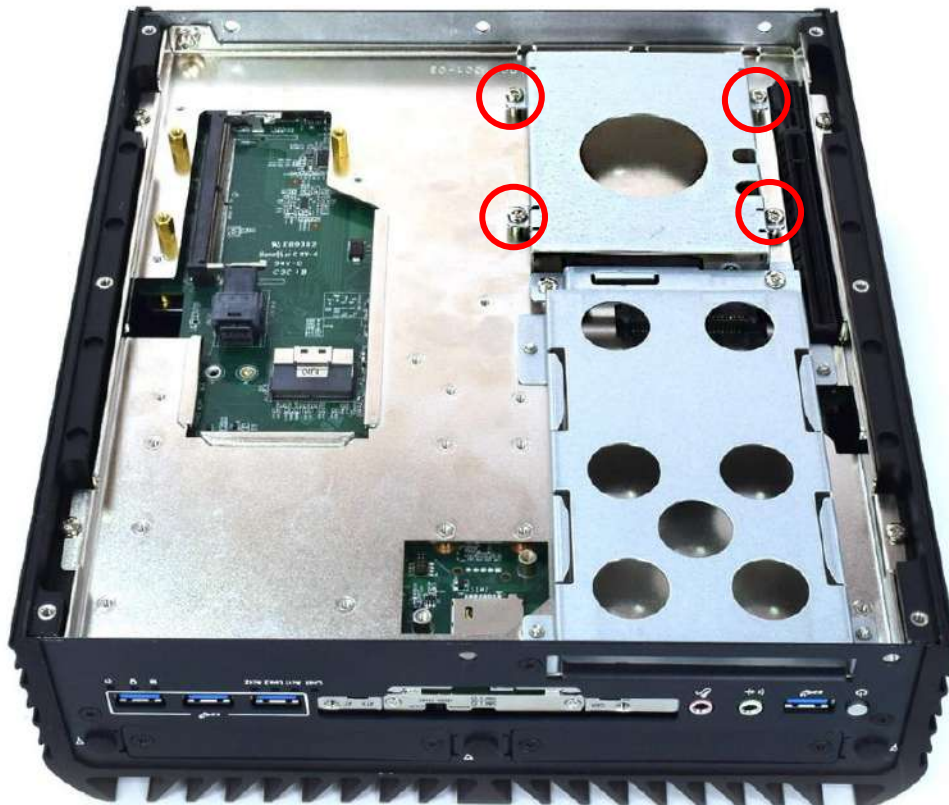

3.12 Installing HDD on removable SATA HDD/SSD bay


1. To unlock the tray lock press the location highlighted at the red circle below and pull the tray towards you to remove the SATA HDD/SSD bay.



2. Unlock the drive lock by lifting the it up as shown below and insert the HDD/SSD card.



3. Secure the drive lock by pushing it back down as shown below.

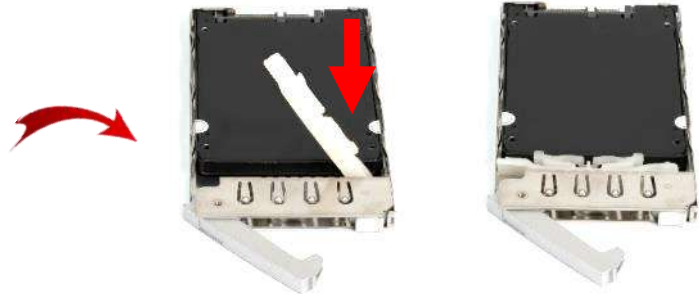

4. Once the HDD/SSD card is secure, place the tray back into the bay and secure the tray lock.



3.13 Installing HDD on removable HDD bay (for RCO-6000-ADL-2E16-4B7M)

1. Unscrew the toolless screw as shown in the locations below to remove the HDD bracket.




2. To open the tray lock, press down onto the location at the red circle shown below and remove the tray by pulling the tray out towards you.



3. Unlock the drive lock (white color lever) by lifting it up as shown below and insert the HDD/SSD card, then lock the drive lock by pressing it back down.



4. Once the HDD/SSD card is secure, place the tray back into the bay and secure the tray lock.

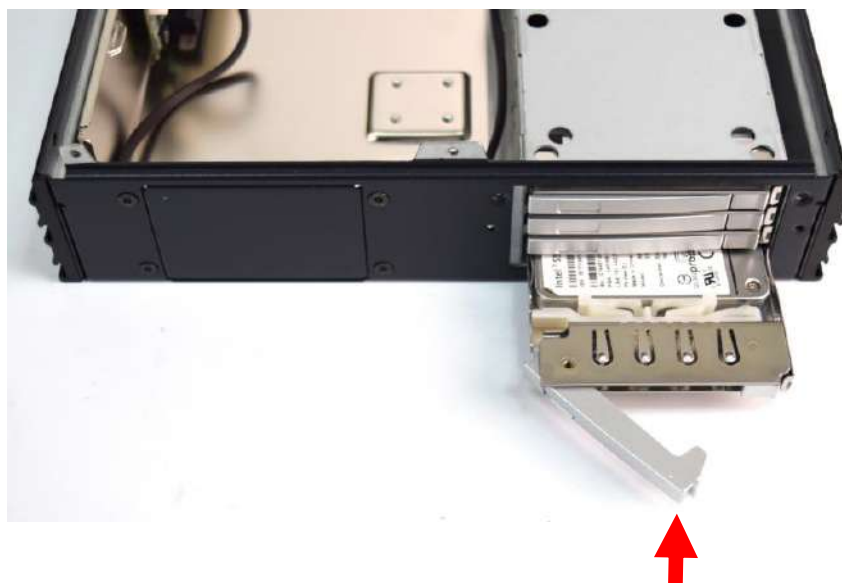

3.14 Installing HDD on removable HDD bay (for RCO-6000-ADL-2E16-2B15M)

1. Unscrew the toolless screw as highlighted in the two circles in the first picture below to remove the HDD bracket.


To remove the tray, unlock the tray lock by pressing on the side of the silver tray and pull the tray towards you.




2. Once the tray is removed, place the HDD/SSD card (left) onto the tray (right).




3. Align the HDD single side screw holes with the holes of the HDD tray as shown below.

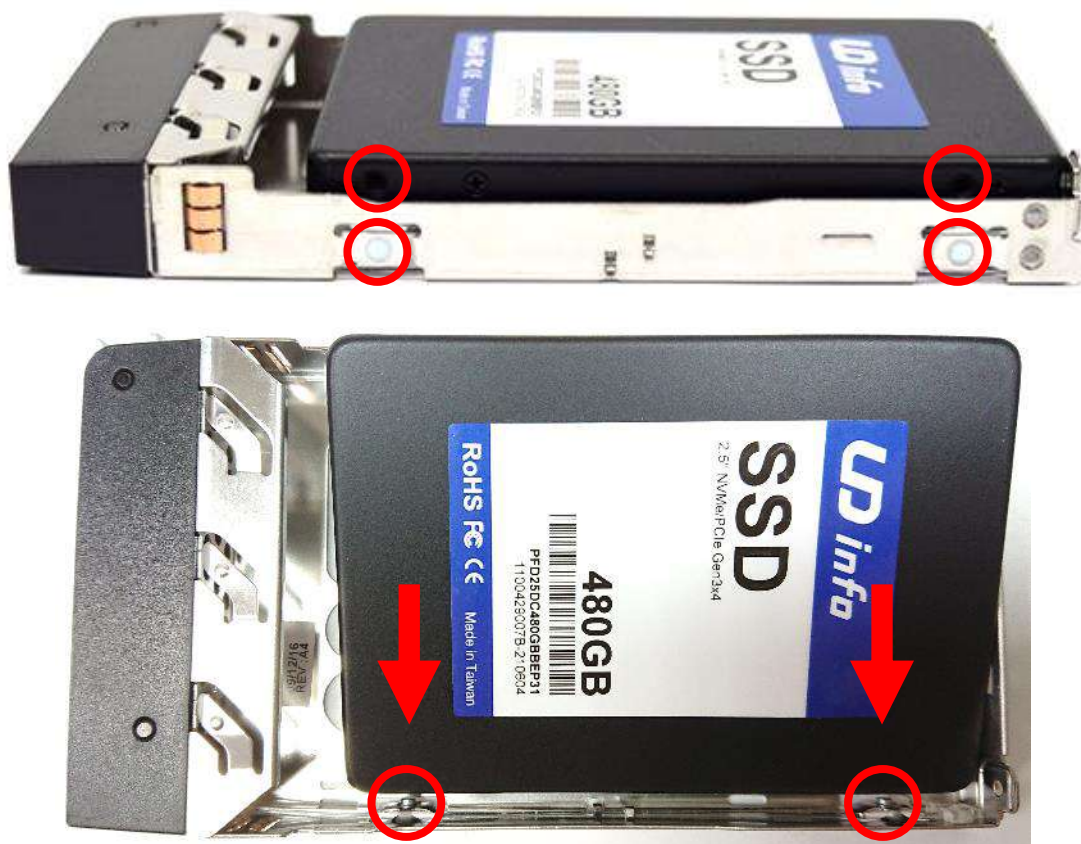

4. Gently press down on the HDD card on the other side as shown in the photo below until you hear a “click” sound. Ensure the HDD is secured on the HDD tray.

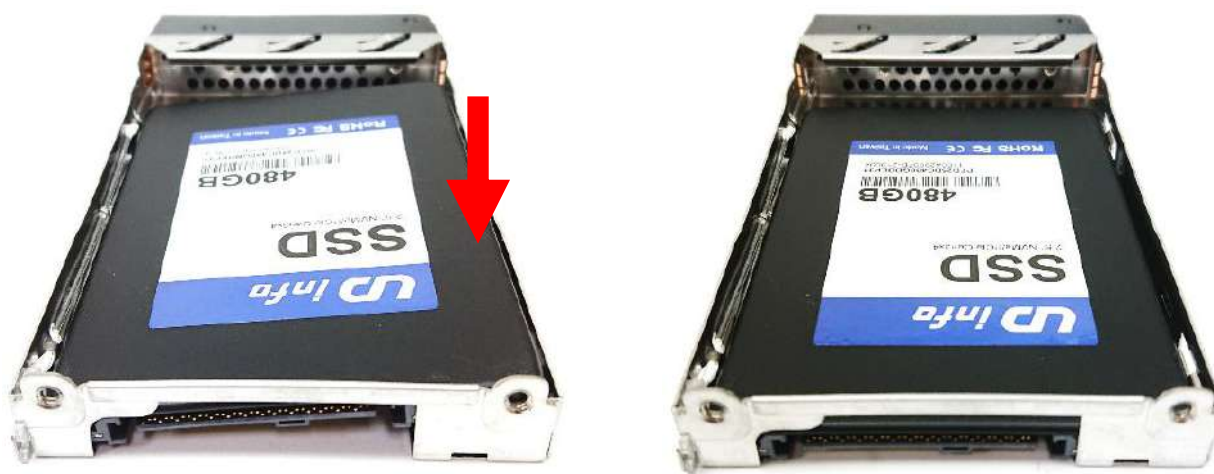


5. Re-insert the tray back into the system and secure the tray lock.

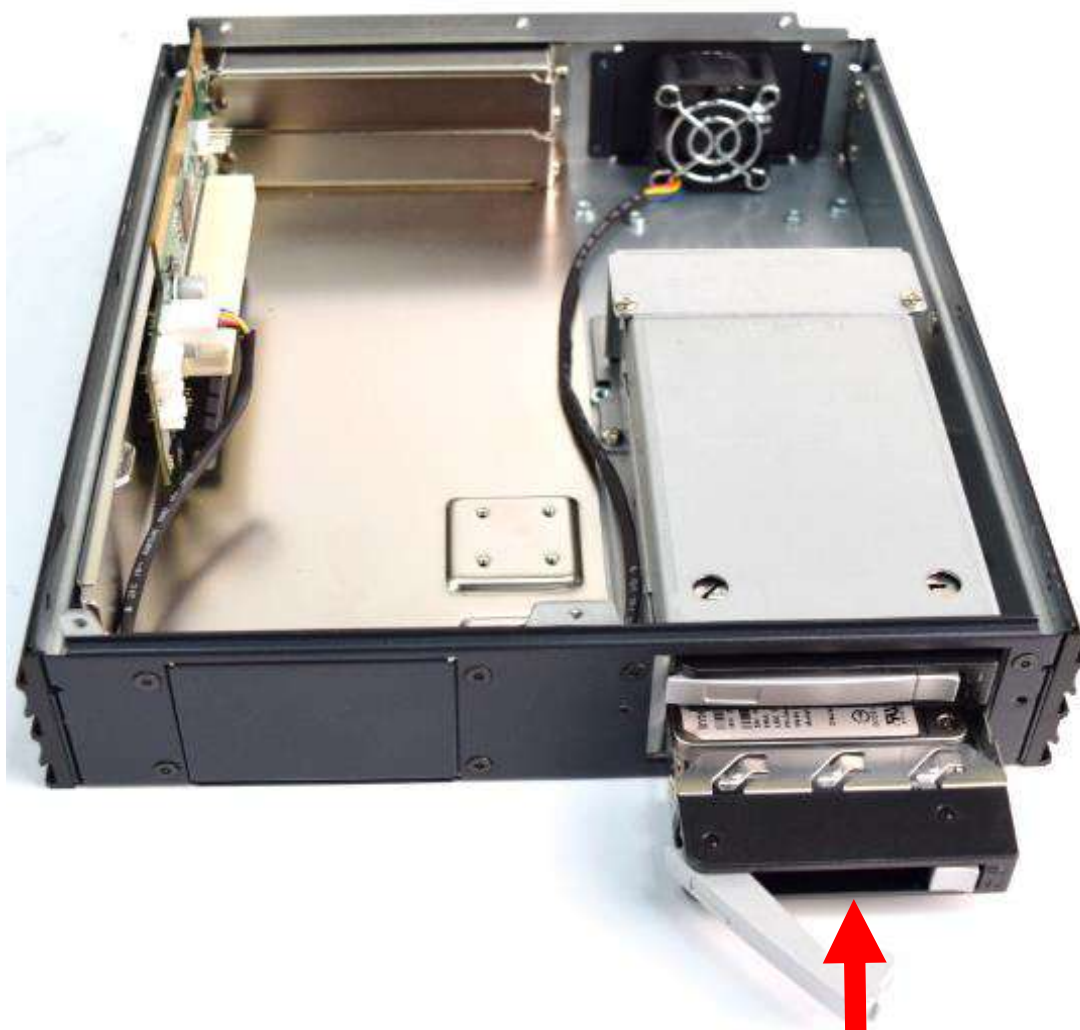

3.15 Installing HDD On The Removable HDD bay (for RCO-6000-ADL-8NS)

1. Unscrew the toolless screws at the locations circled below to remove the HDD bracket.

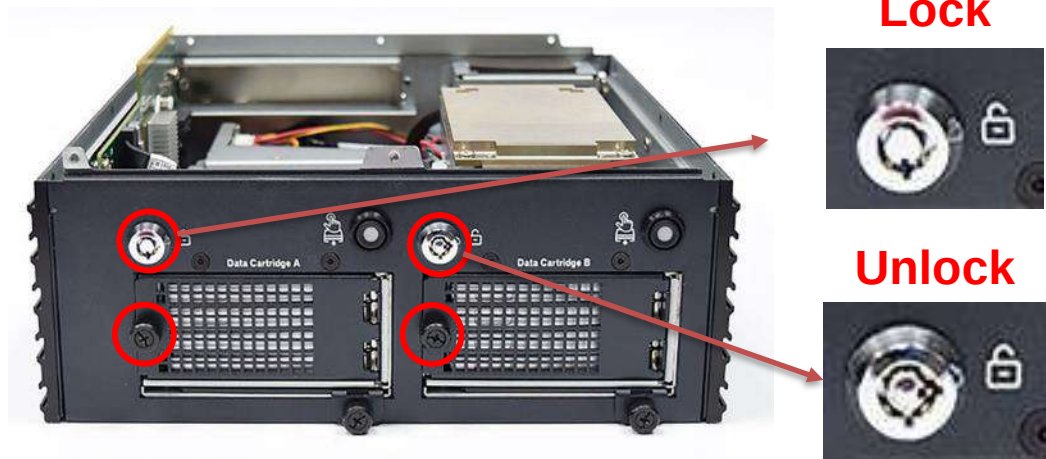


2. Unlock the tray lock by pressing down on the right hand side of the tray indicated by the red circle and remove the tray by pulling it towards you.



3. Unlock the drive lock (white color) by pulling it in an upward direction and insert the HDD/SSD. Then, push the drive lock back down until you hear a “click” sound. Ensure the HDD/SSD card is secure.




4. Ensure the tray is facing the right way up by aligning the tray lock with the other tray locks, and slide it back inside the slot and secure the tray lock.

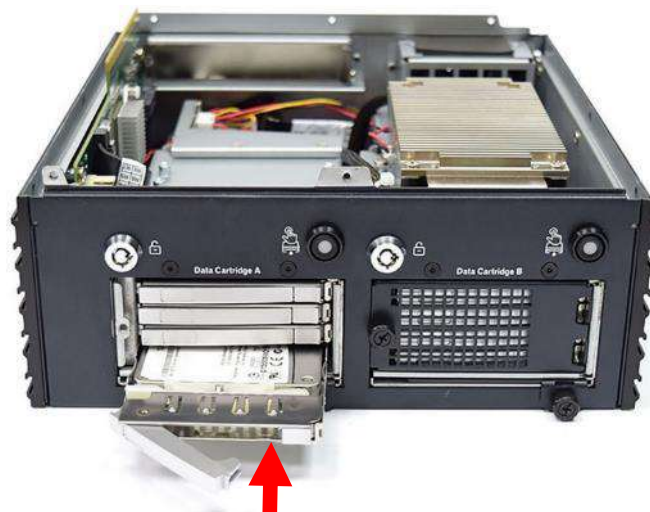


3.16 Installing the PCIe Expansion Card (for RCO-6000-ADL-2E16)


1. First, remove the 4 screws indicated at the locations highlighted with red circles below.

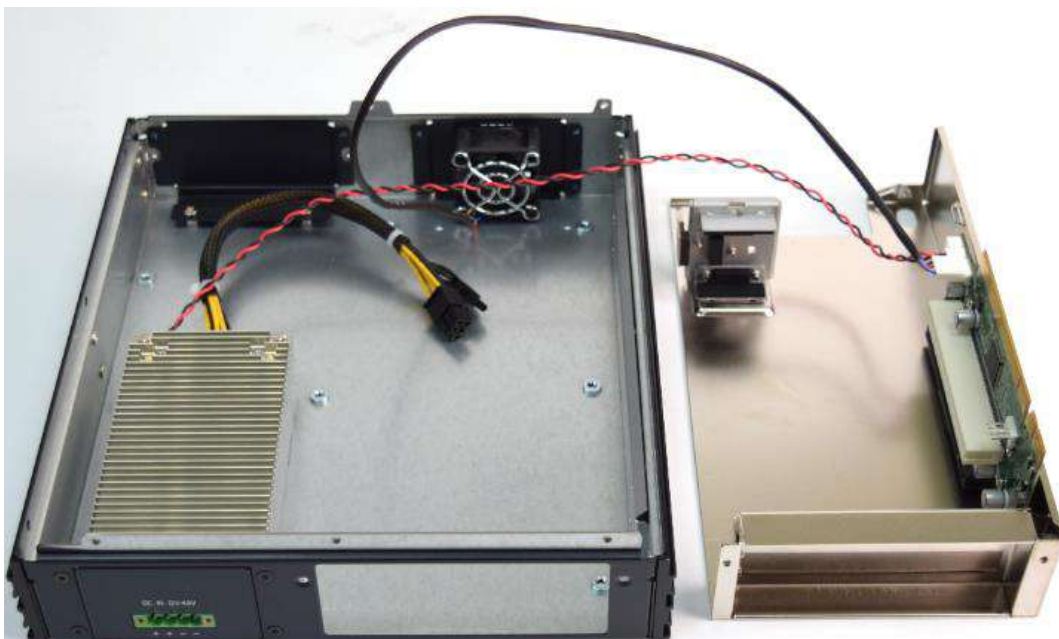

2. Remove the screws located at the highlighted red circles below.


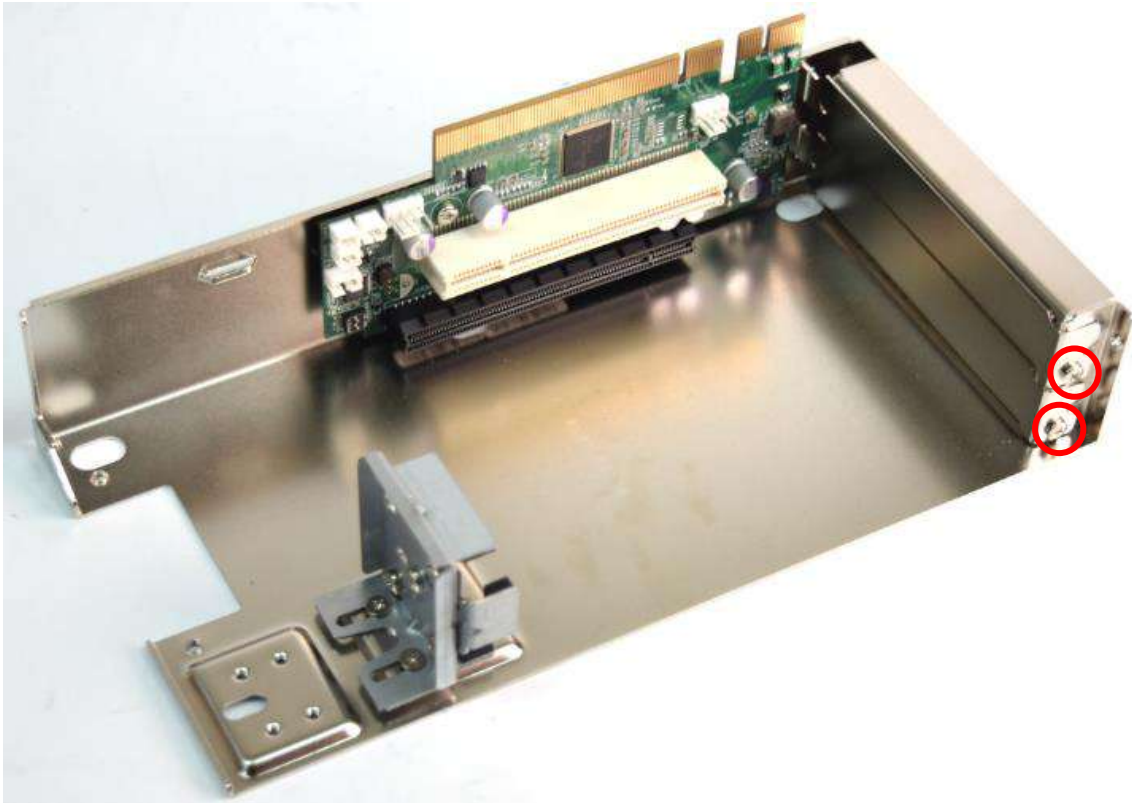


3. Install the PCIe/PCI extension card and ensure the gold finger is inserted properly. Once the card is inserted, fasten the two screws.

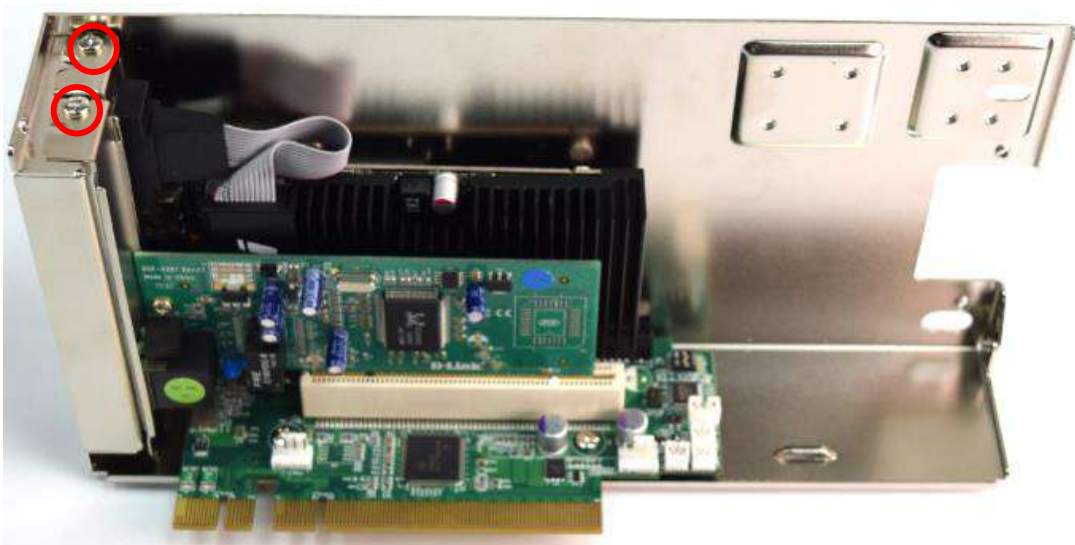

3.17 Installing PCIe/PCI Expansion Card (for RCO-6000-ADL-8NS)

1. Remove the 5 screws located at the red circles below. Two are located outside of the system, and three are located inside the system.

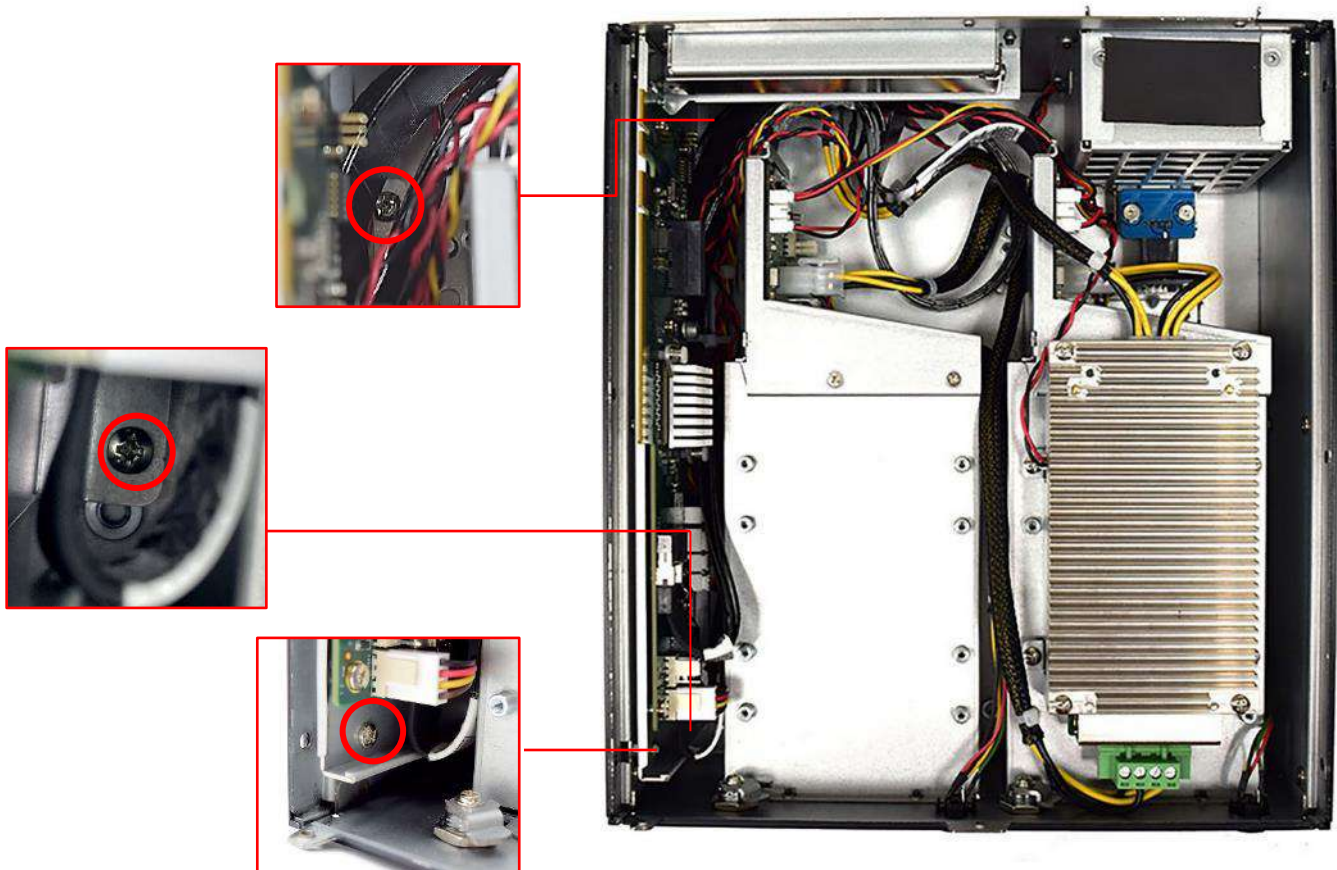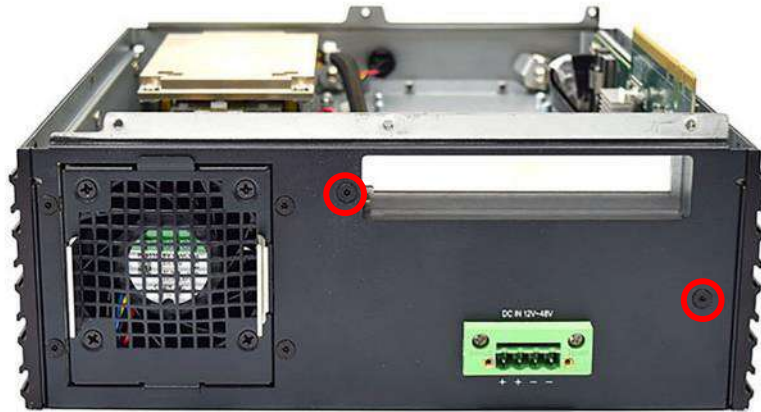


2. Take out the PCIe/PCI expansion card bracket.




3. Unscrew the screw indicated at the circle below.



4. Install the PCIe/PCI extension card and ensure the gold finger is inserted properly. Once PCIe/PCI extension card is secured, fasten the screw.

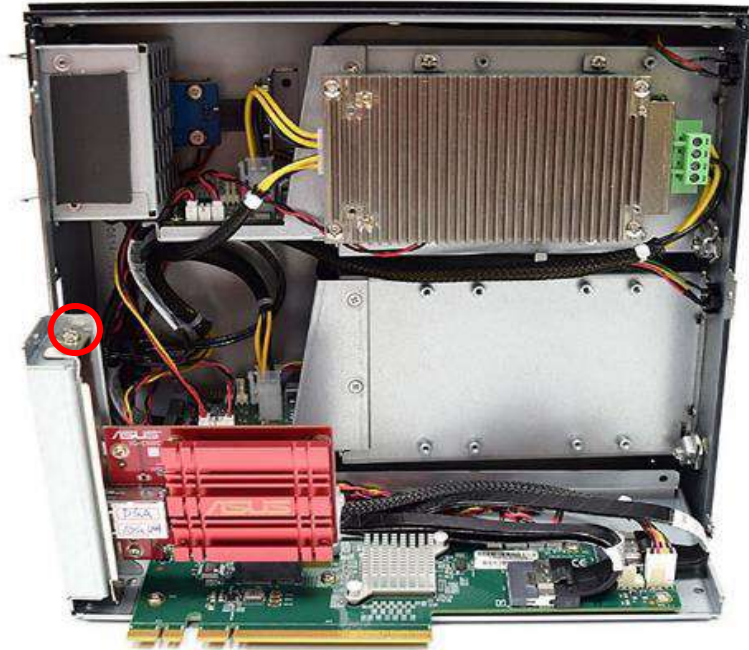

5. Re-insert the PCIe/PCI expansion card bracket back into the system. Once the PCIe and PCI Expansion card bracket is secure, fasten the 5 screws.

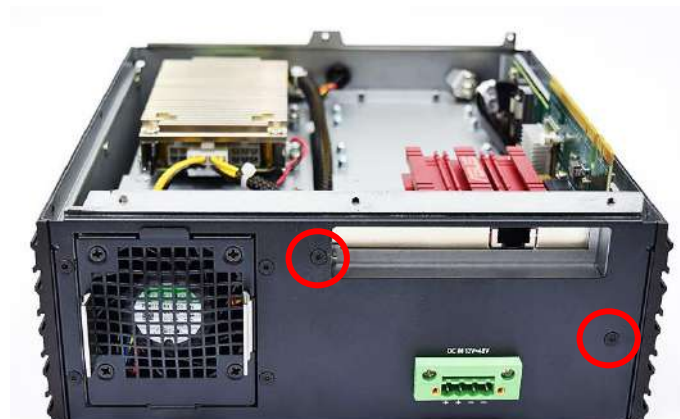

3.18 Appendix A Optional CANBus Cable

1. 1-TCAN00001 > Dual Channel





CONN1			CONN2	CONN3
PIN NO.		FUNCTION	PIN NO.	PIN NO.
7	TWIST	CAN1 H	2	-
2		CAN1 L	1	-
5		CAN2 H	-	2
4		CAN2 L	-	1

2. 1-TCAN00002 > Single Channel




CONN1			CONN2
PIN NO.		FUNCTION	PIN NO.
7	TWIST	CAN1 H	2
2		CAN1 L	1



3. Press the cutout indicated by the red arrow below in the top photo to create a hole. The outcome should look like the bottom photo.

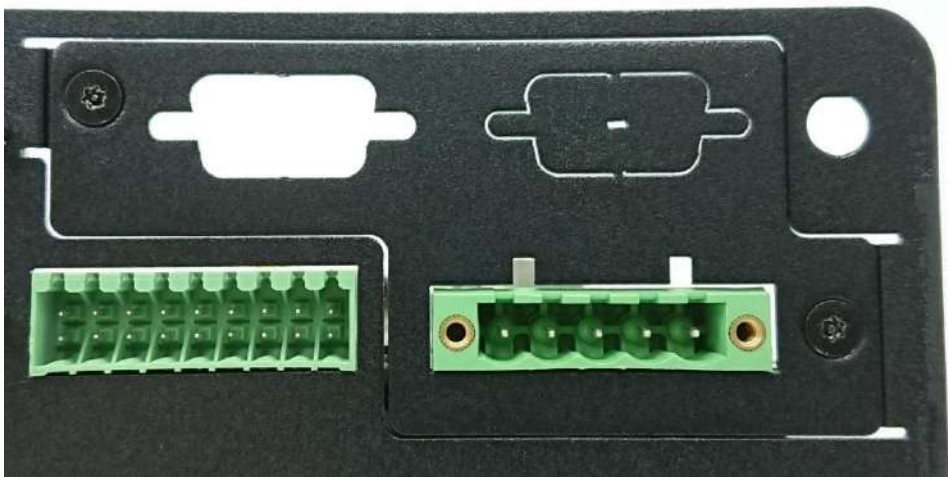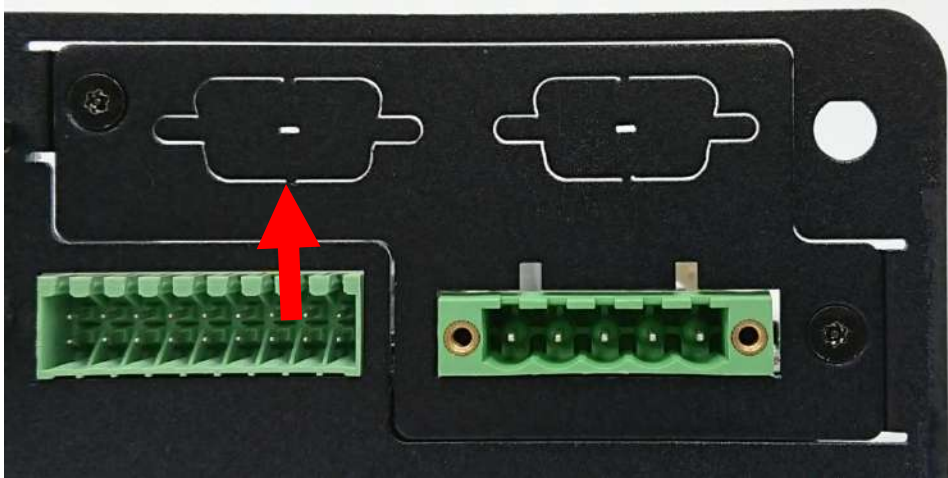

4. Insert the CANBus connector in the hole.

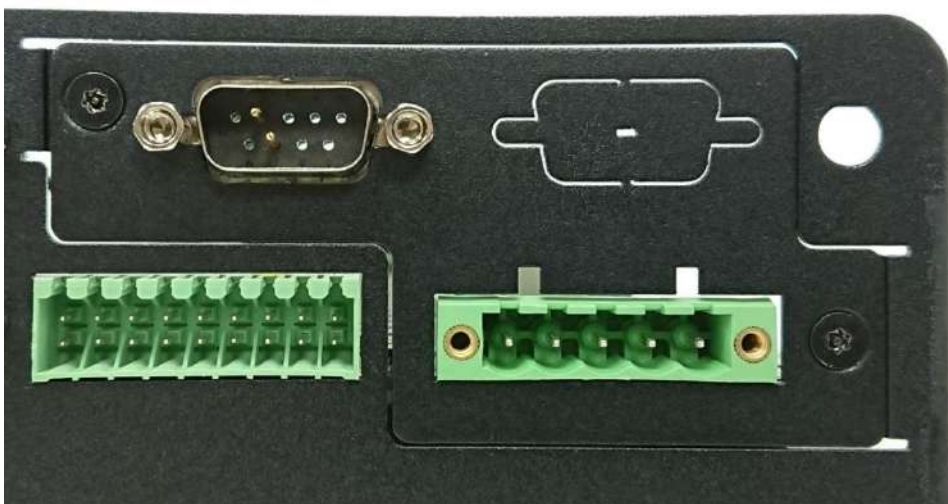

5. Attach the CANBus cable end to the motherboard at the location indicated in the pictures below.

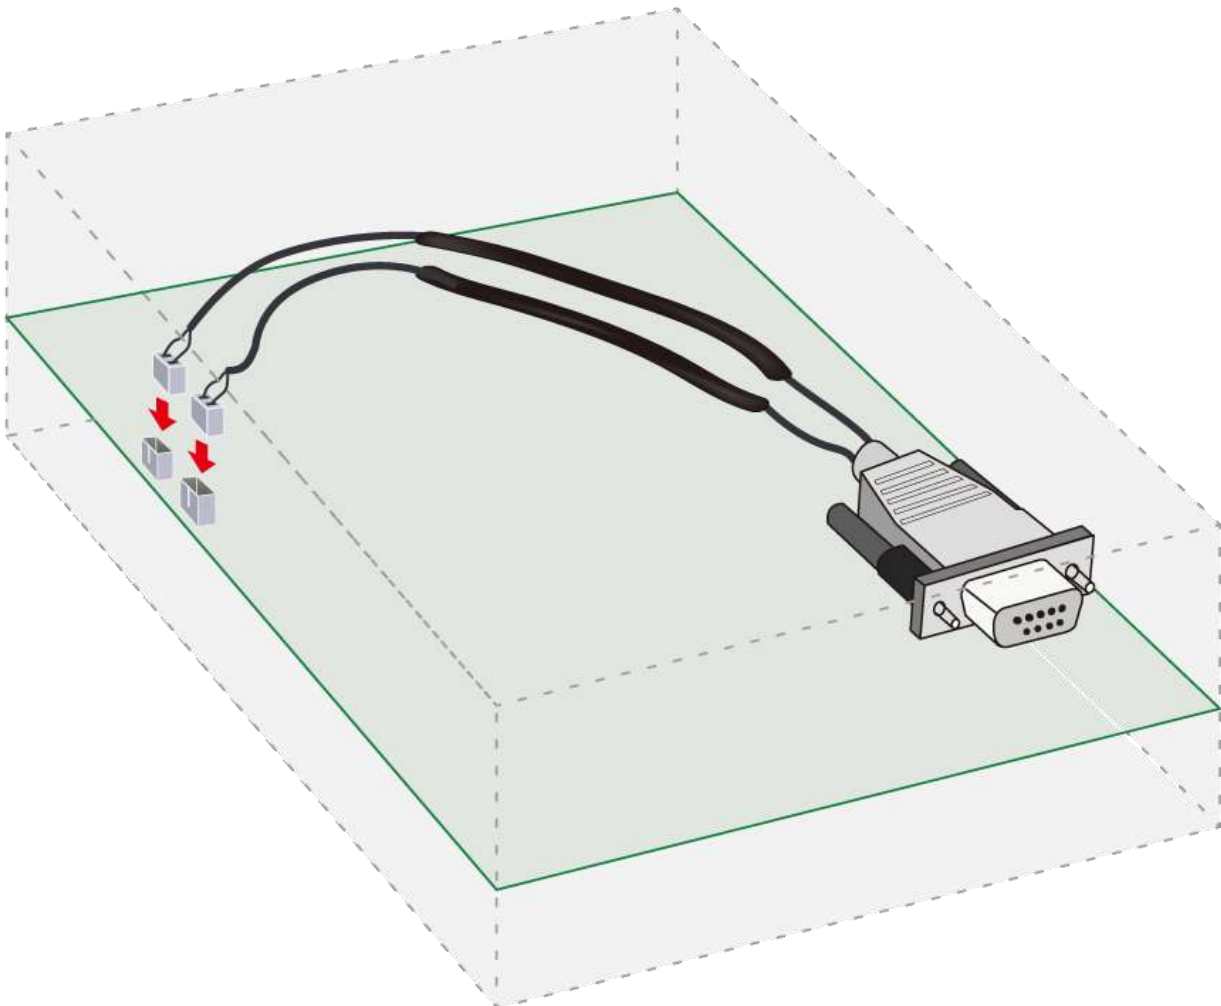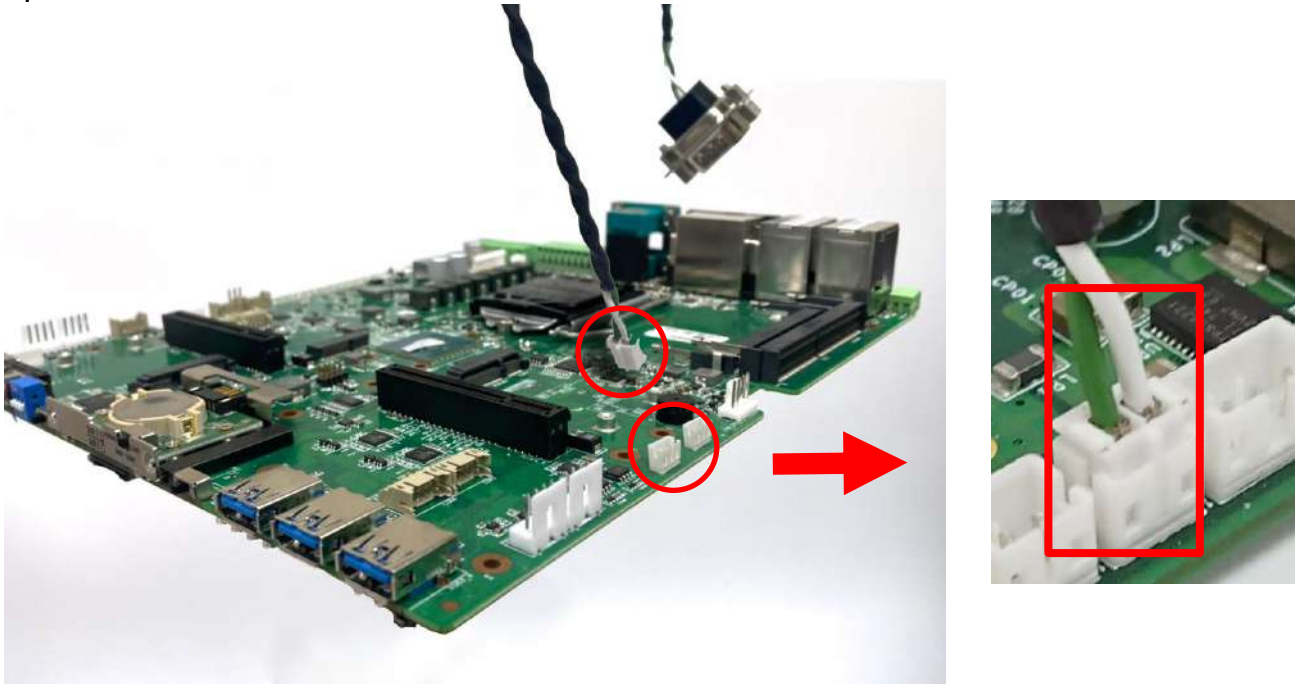


3.19 Installing Wall Mount Kit

1. The Wall Mount Kit is provided with the RCO-6000-ADL as a standard package.



2. The Wall Mount Kit requires 8 screws as pictured above. The 8 screws will fasten the left mount piece to the right, as indicated by the picture below.

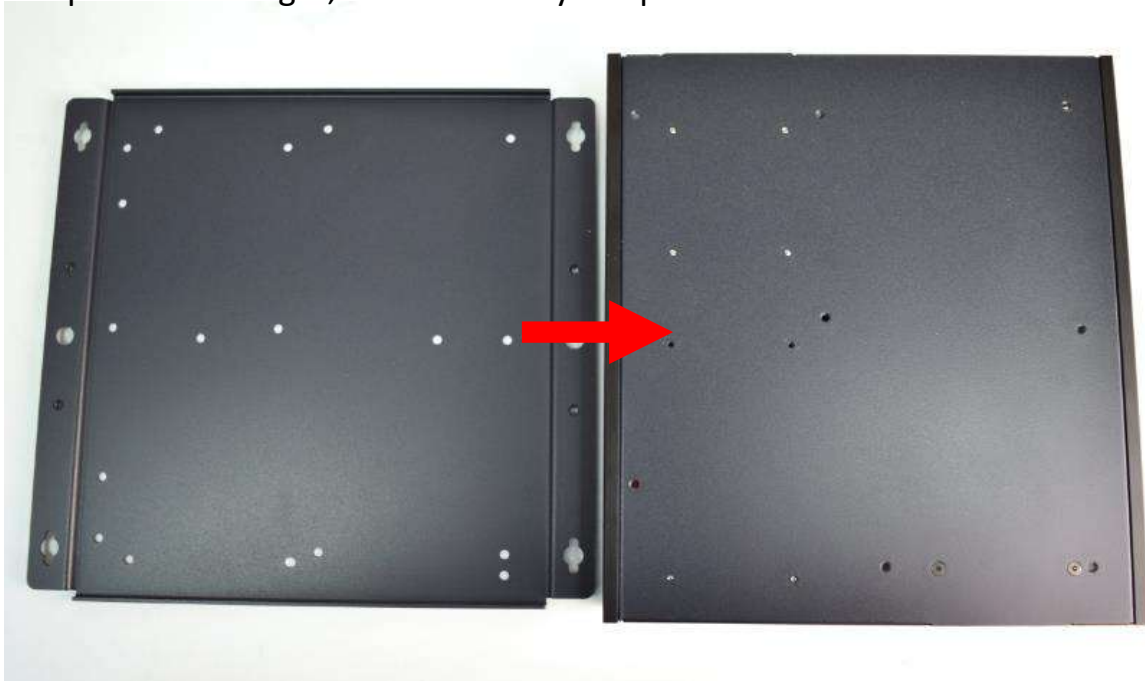


3. If you have a 2-slot expansion module, fasten the 8 screws at the locations indicated by the red circles on the left picture.

If you have a 3-slot expansion module, fasten the 8 screws at the locations indicated by the red circles on the right picture.







3.20 AC Adapter with 3P terminal block

1. Below is a step-by-step photo sequence (from left to right) of how to wire a AC Adapter (3P).

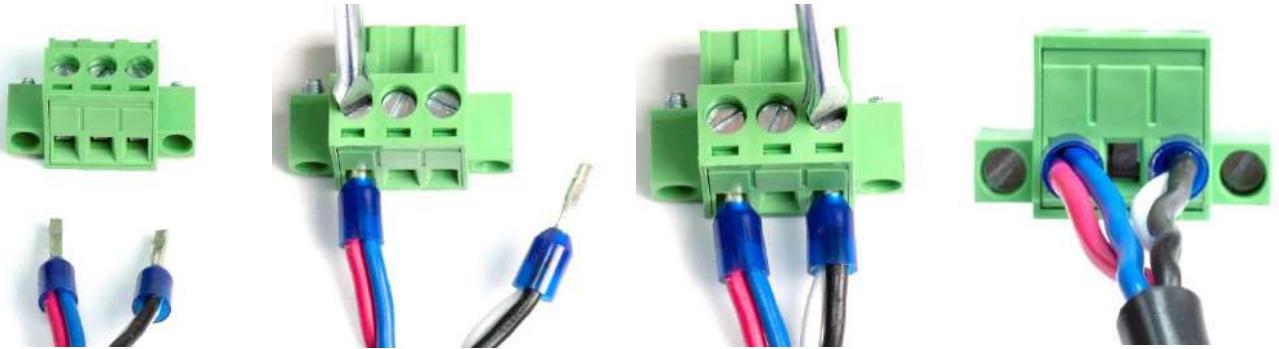


2. Below is a picture of a wired DC Power Supply (3P) input.

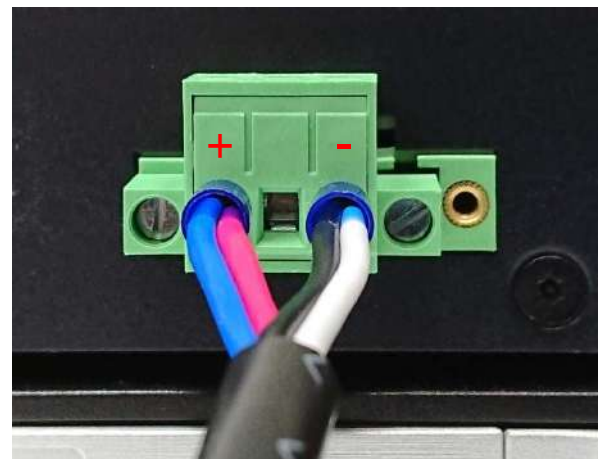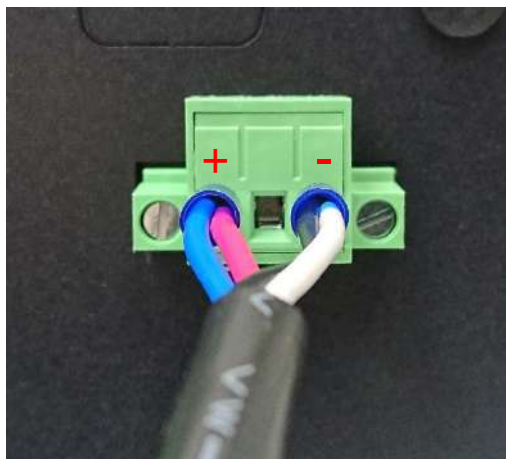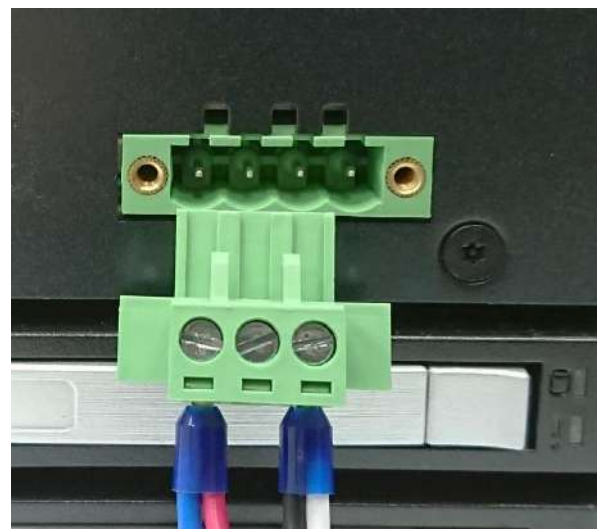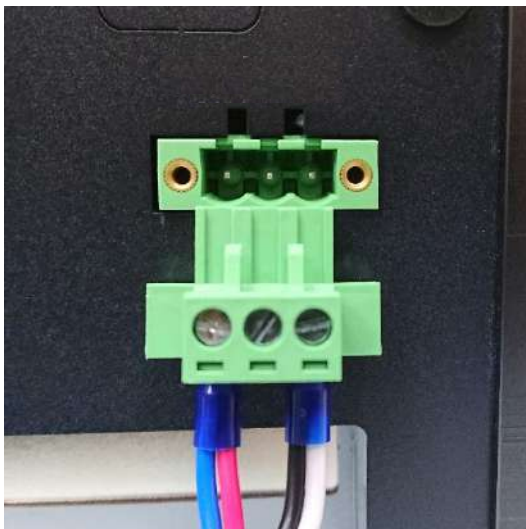



3.21 AC Adapter with 4P terminal block

* 12V requires 4-pin terminal block for card/storage expansion

1. Below is a pictorial diagram of an AC adapter (4P).

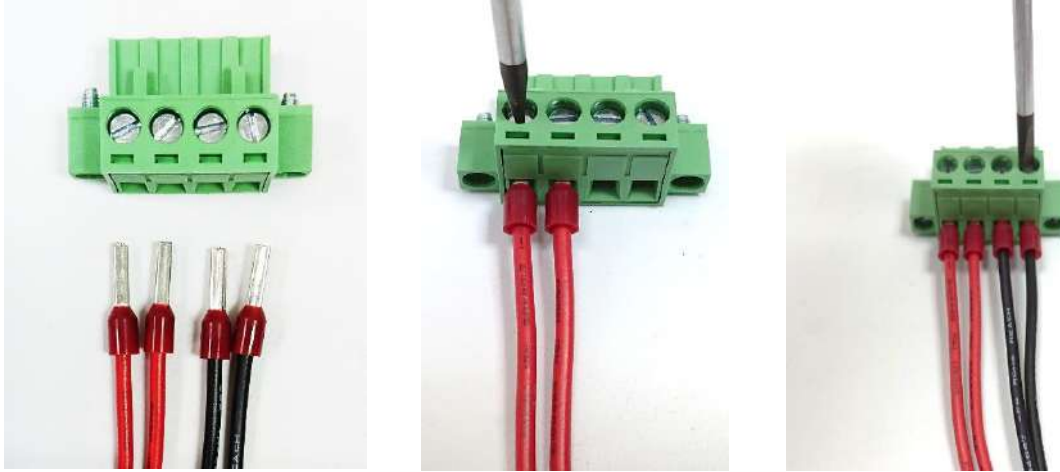

2. Below is a pictorial diagram of a DC power input (4P).

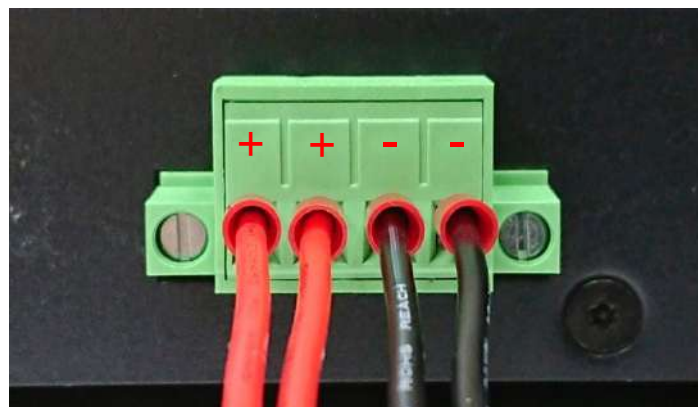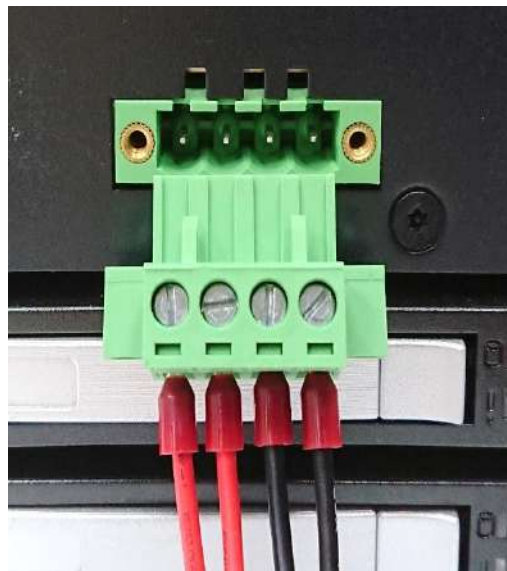



Chapter 4

BIOS Setup

4.1 BIOS Introduction

The BIOS provides an interface to modify the configuration. When the battery is removed, all the parameters will be reset.

BIOS Setup

Power on the embedded system and by pressing immediately allows you to enter the setup screens. If the message disappears before you respond and you still wish to enter the Setup, restart the system by turning it OFF and ON or pressing the RESET button.

You may also restart the system by simultaneously pressing <Ctrl>, <Alt>, and <Delete> keys.

Control Keys	
<→> <←>	Select Screen
<↑> <↓>	Select Item
<Enter>	Select
<Page Up/+>	Increases the numeric value or makes changes
<Page Down/->	Decreases the numeric value or makes changes
<F1>	General Help
<F2>	Previous Value
<F3>	Load Optimized Defaults
<F4>	Save Configuration and Exit
<Tab>	Select Setup Fields
<Esc>	Exit BIOS Setup

Main Setup


The main menu lists the setup functions you can make changes to. You can use the arrow keys (↑ ↓) to select the item. The on-line description of the highlighted setup function is displayed at the bottom of the screen.

General Help <F1>

The BIOS setup program provides a General Help screen. You can call up this screen from any menu by simply pressing <F1>. The Help screen lists the appropriate keys to use and the possible selections for the highlighted item. Press <Esc> to exit the Help screen.

4.2 Main Setup

Press to enter BIOS CMOS Setup Utility. The Main setup screen is showed as following when the setup utility is entered. System Date/Time is set up in the Main Menu.

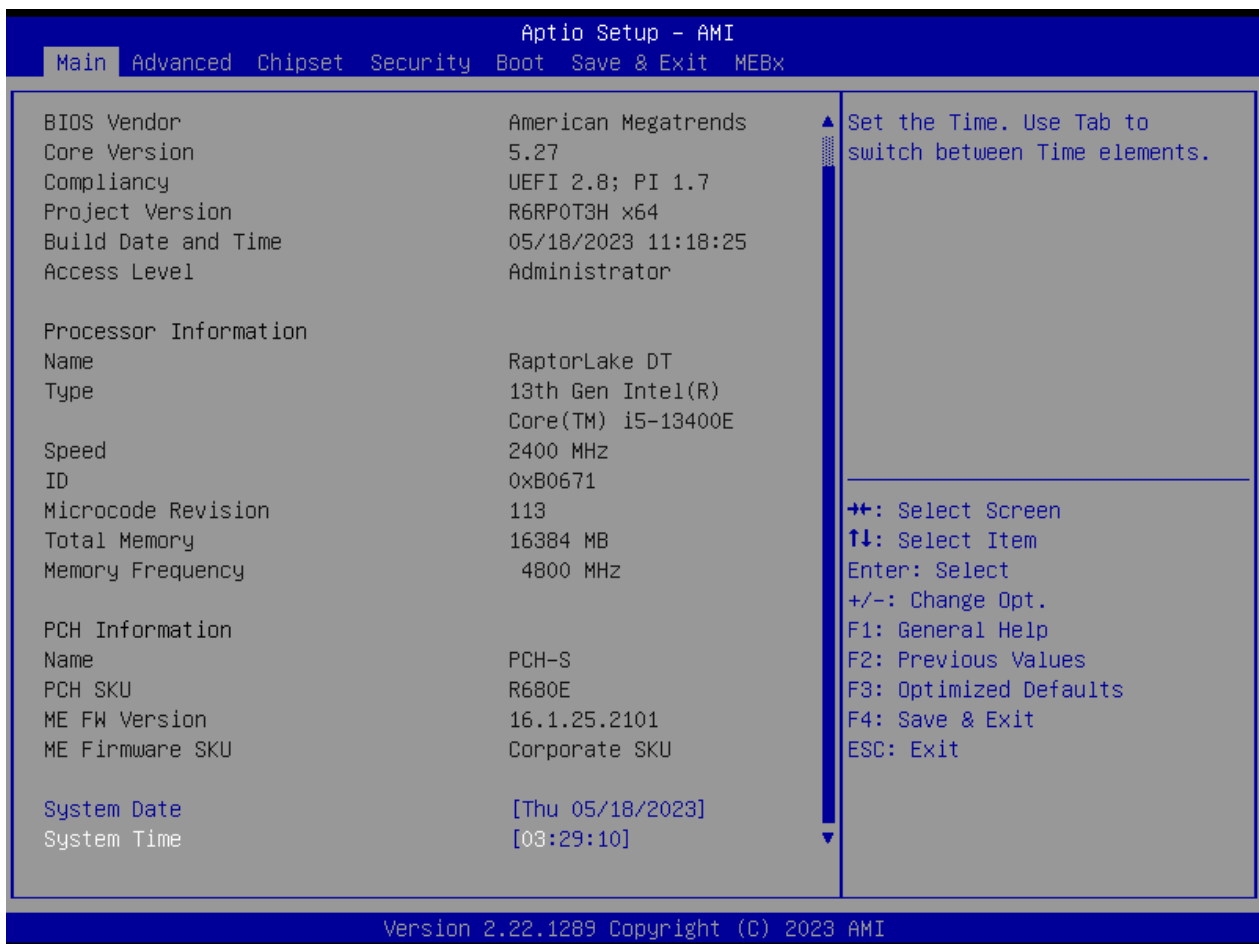


■ System Date

Set the system date. Please use <Tab> to switch between data elements.

■ System Time

Set the system time. Please use <Tab> to switch between time elements.

4.3 Advanced Setup

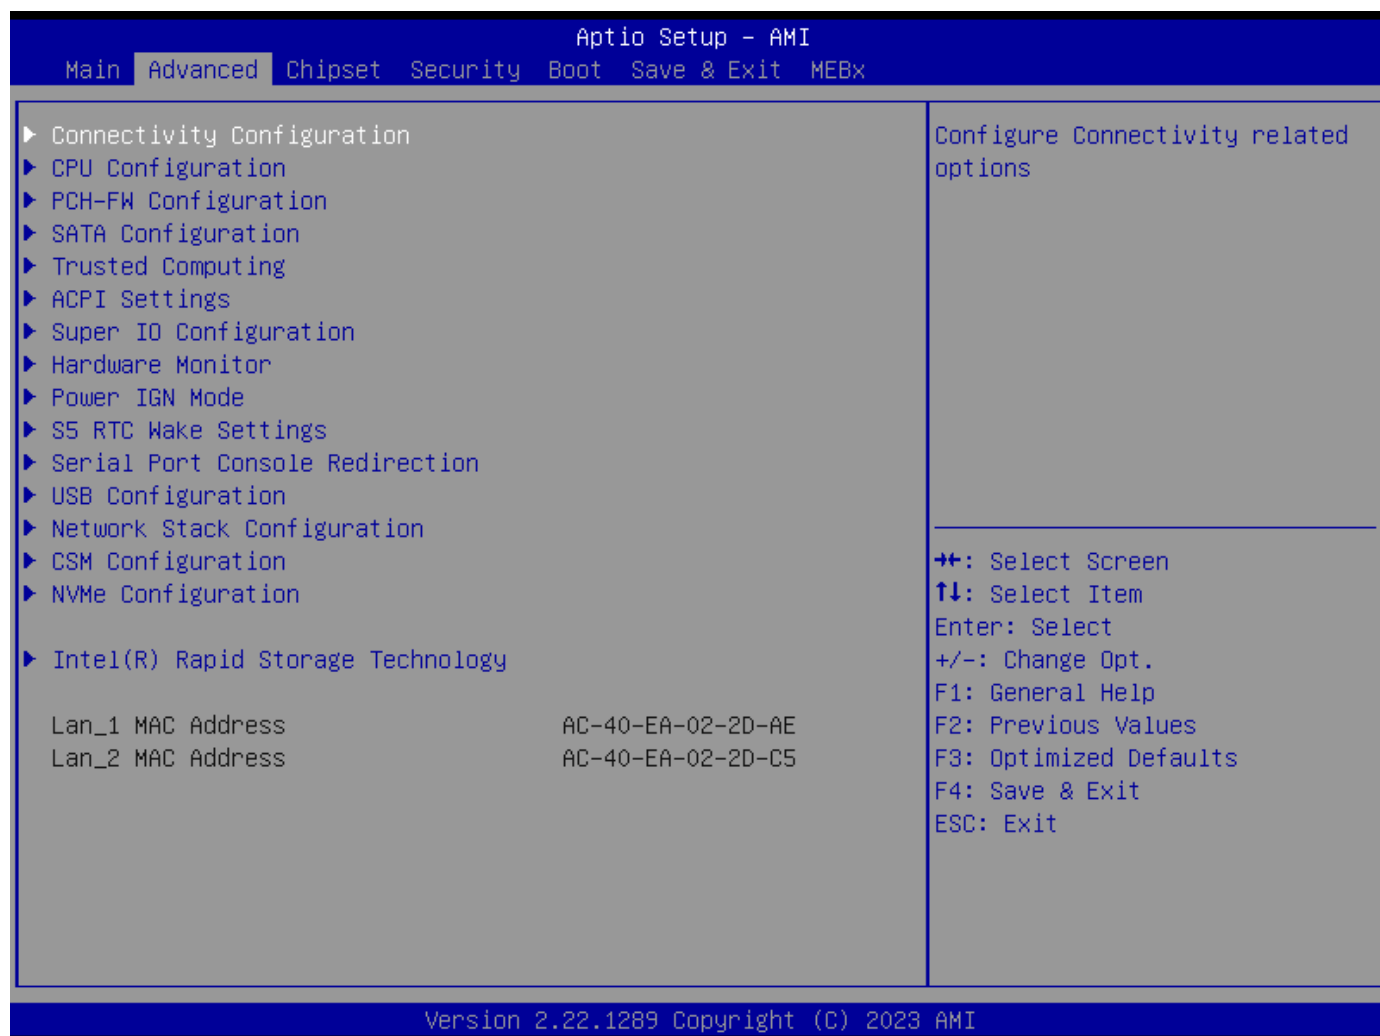


4.3.1 Connectivity Configuration




Item	Options	Description
CNVi Mode	Disable Integrated, Auto Detection[Default]	This option configures Connectivity. [Auto Detection] means that if Discrete solution is discovered it will be enabled by default. Otherwise Integrated solution (CNVi) will be enabled; [Disable Integrated] disables Integrated Solution. NOTE: When CNVi is present, the GPIO pins that are used for radio interface cannot be assigned to the other native function.
Wi-Fi Core	Enabled[Default], Disabled	This is an option intended to Enable/Disable Wi-Fi Core in CNVi
BT Core	Enabled[Default], Disabled	This is an option intended to Enable/Disable BT Core in CNVi.

4.3.2 CPU Configuration

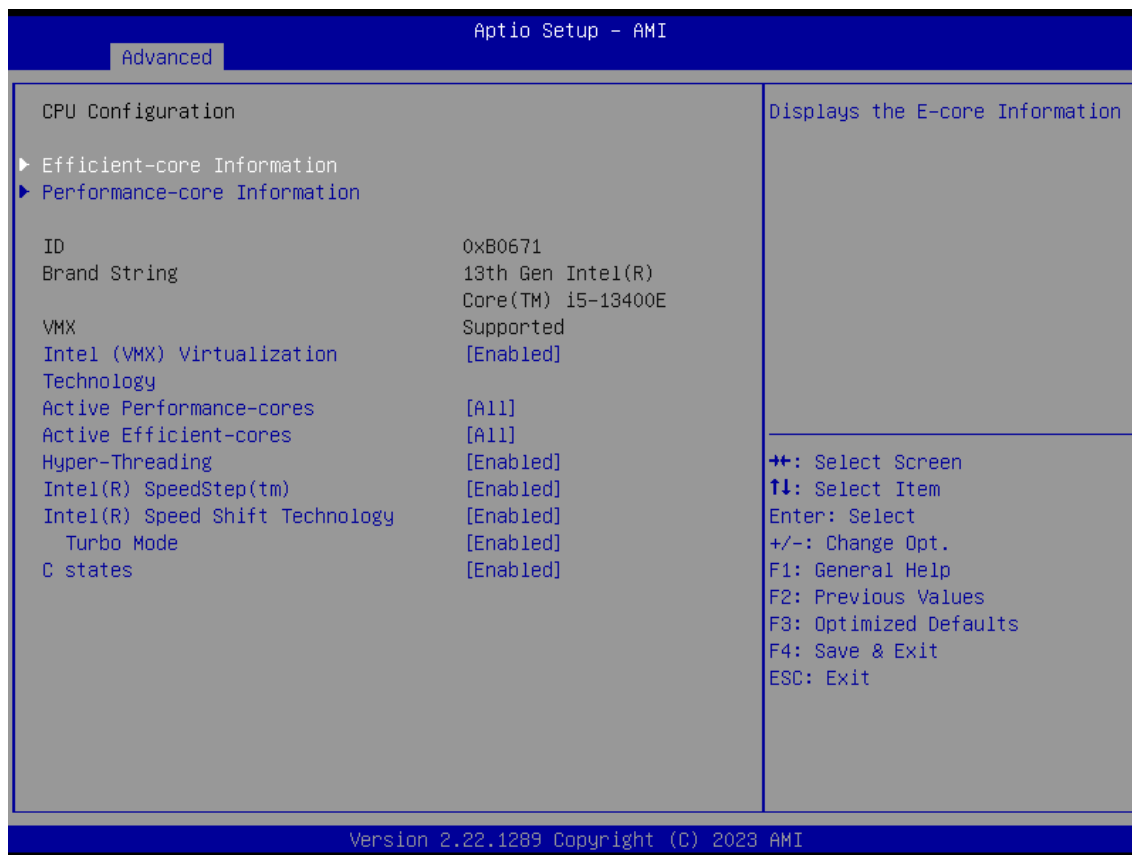


Item	Options	Description
Intel (VMX) Virtualization Technology	Disabled, Enabled[Default]	When enabled, a VMM can utilize the additional hardware capabilities provided by Virtualization Technology.
Active Performance-cores	All[Default] , 5,4,3, 2,1	Number of P-cores to enable in each processor package. Note: Number of Cores and E-cores are looked at together. When both are {0,0}, Pcode will enable all cores.
Active Efficient-cores	All[Default] , 3,2, 1,0	Number of E-cores to enable in each processor package. Note: Number of Cores and E-cores are looked at together. When both are {0,0}, Pcode will enable all cores.
Hyper-Threading	Disabled, Enabled[Default]	Enabled for Windows XP and Linux (OS optimized for Hyper-Threading Technology) and Disabled for other OS (OS not optimized for Hyper-Threading Technology).
Intel(R) SpeedStep(tm)	Disabled, Enabled[Default]	Allows more than two frequency ranges to be supported.
Intel(R) Speed Shift Technology	Disabled, Enabled[Default]	Enable/Disable Intel(R) Speed Shift Technology support. Enabling will expose the CPPC v2 interface to allow for hardware controlled P-states.
Turbo Mode	Disabled, Enabled[Default]	Enable/Disable processor Turbo Mode.
C states	Disabled, Enabled[Default]	Enable/Disable CPU Power Management. Allows CPU to go to C states when it's not 100% utilized.


4.3.2.1 Efficient-core Information

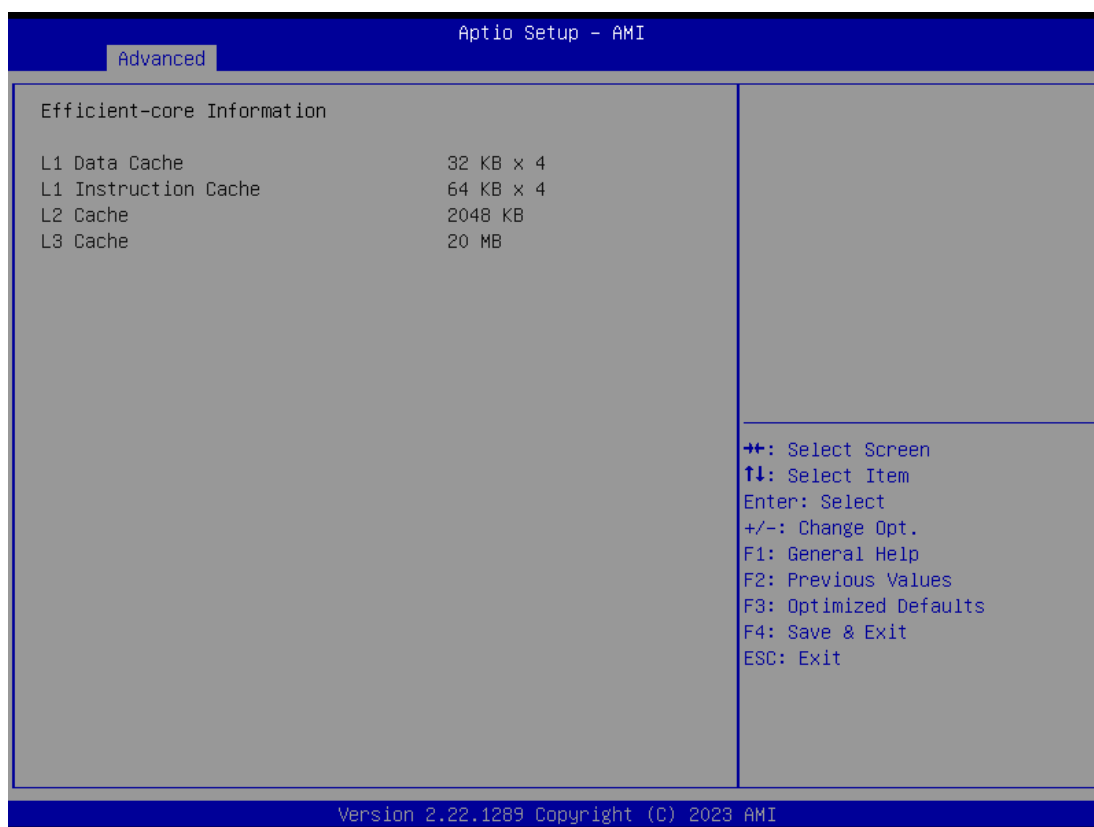

4.3.2.2 Performance-core Information

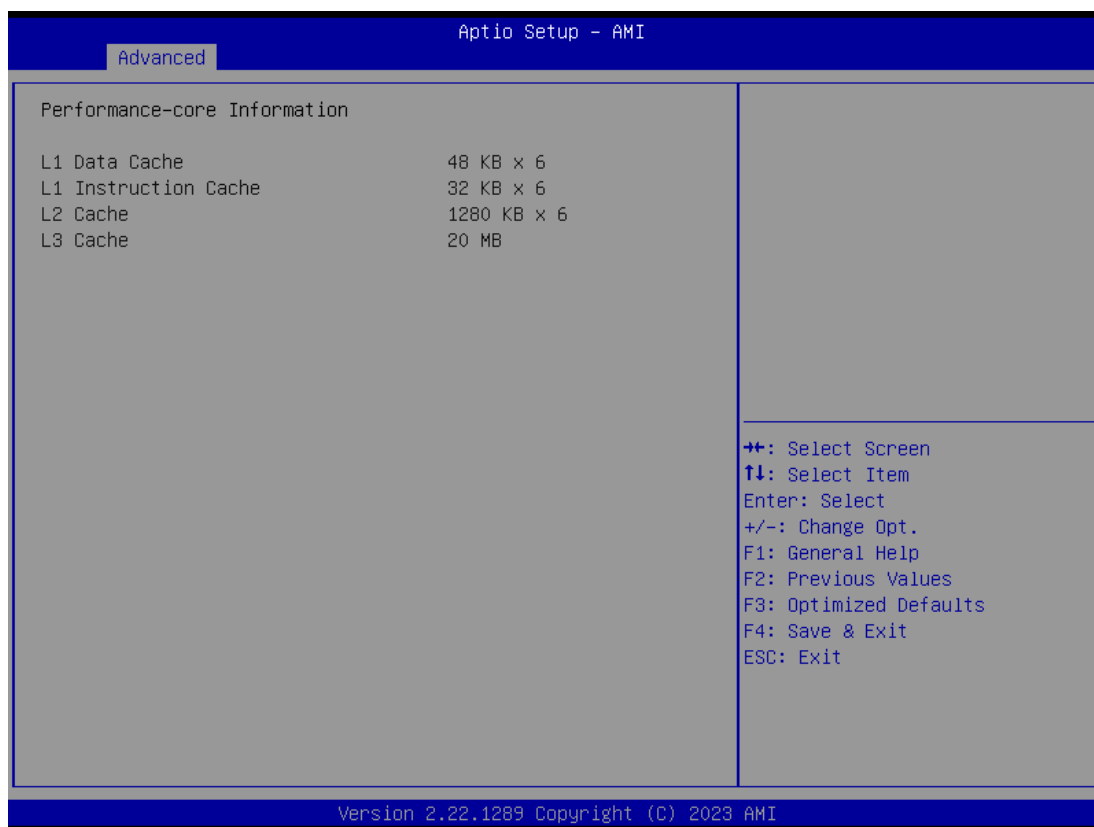


4.3.3 PCH-FW Configuration

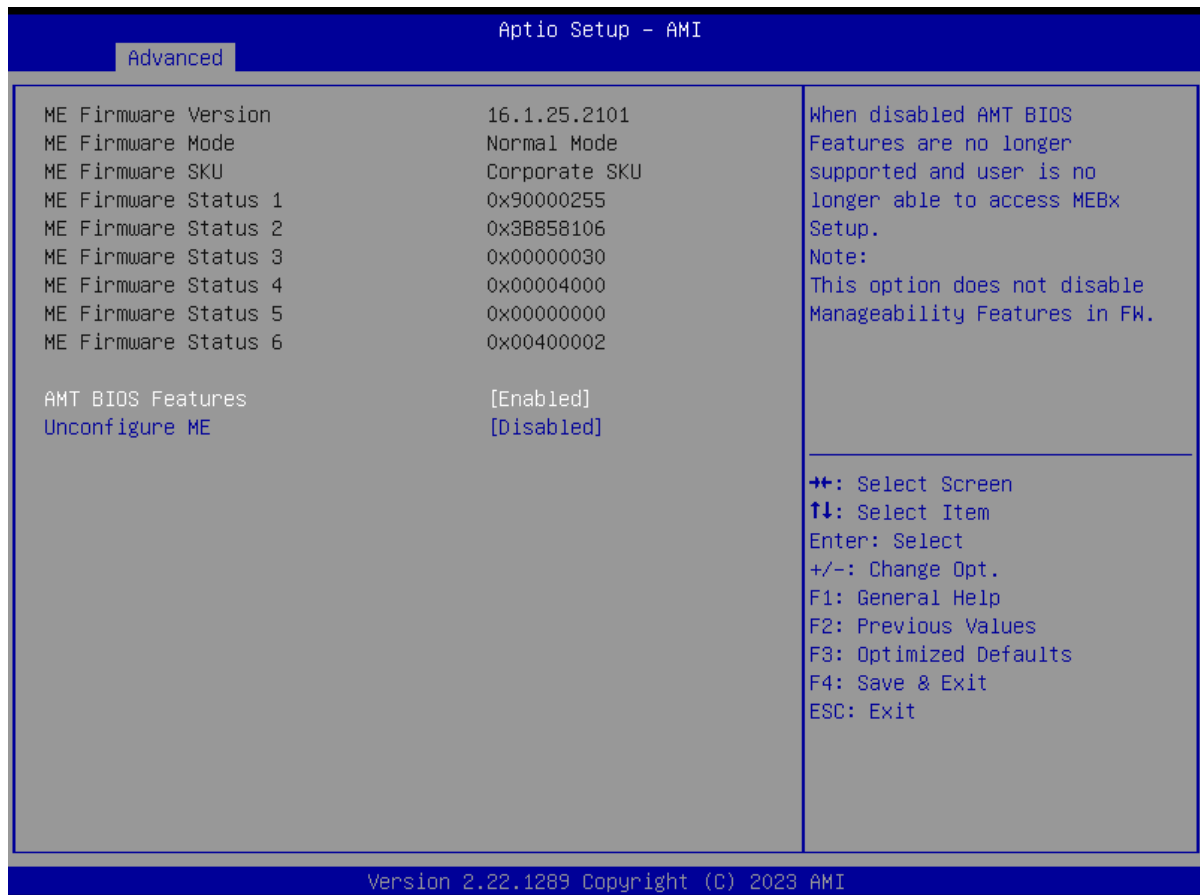

Item	Options	Description
AMT BIOS Features	Disabled, Enabled[Default]	When disabled AMT BIOS Features are no longer supported and user is no longer able to access MEBx Setup. Note: This option does not disable Manageability Features in FW.
Unconfigure ME	Disabled[Default] , Enabled	Unconfigure ME with resetting MEBx password to default on next boot.

4.3.4 SATA and RST Configuration

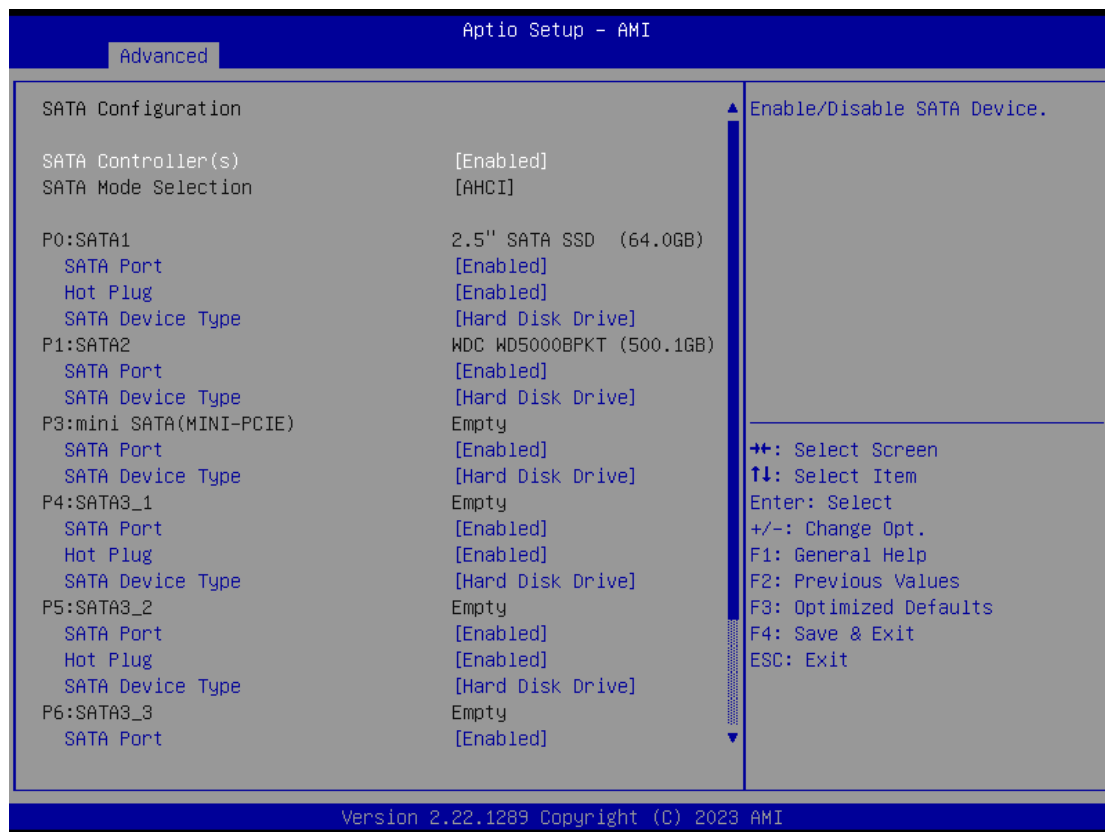


Item	Options	Description
SATA Controller(s)	Enabled[Default] Disabled	Enable/Disable SATA Device.
SATA Port	Disabled, Enabled[Default]	Enable/Disable SATA Port.
Hot Plug	Disabled, Enabled[Default]	Designates this port as Hot Pluggable.
SATA Device Type	Hard Disk Drive[Default] , Solid State Drive	Identify the SATA port is connected to Solid State Drive or Hard Disk Drive.


4.3.5 RST (UEFI RAID) Configuration

How to set the UEFI RAID:


1. When set to “Enable VMD controller”, please save change reset system.

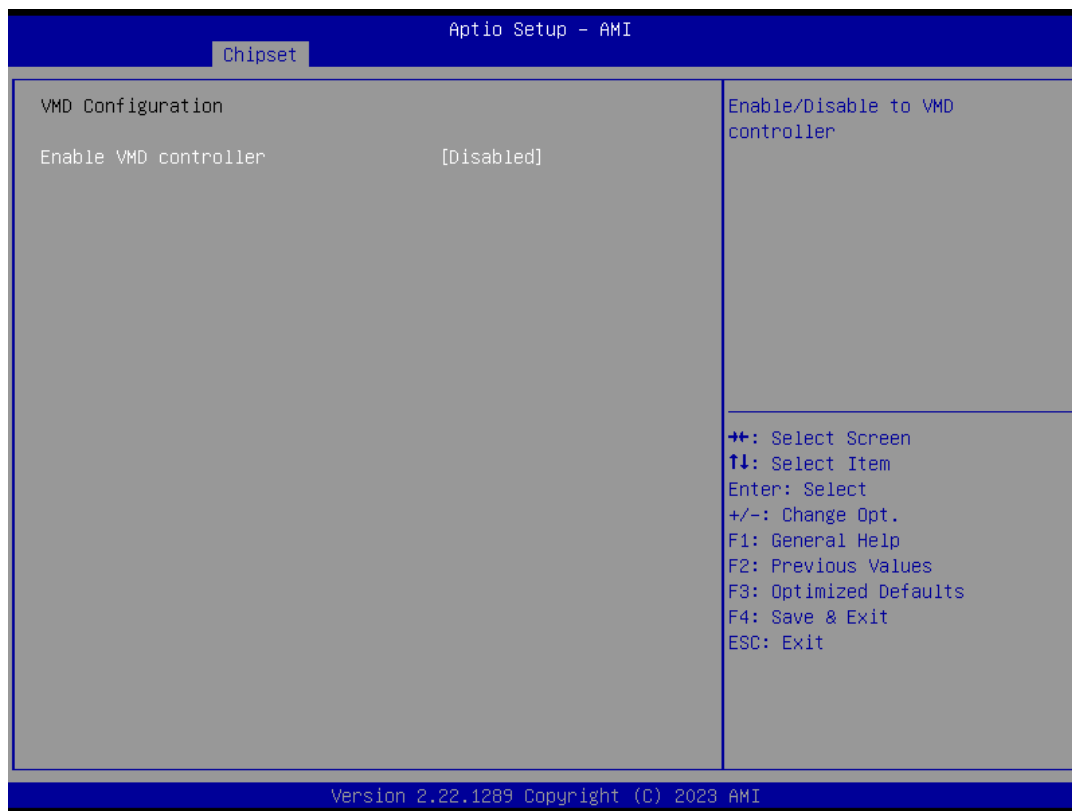

2. After reboot the system, please into BIOS utility and then will see “Intel (R) Rapid Storage Technology”

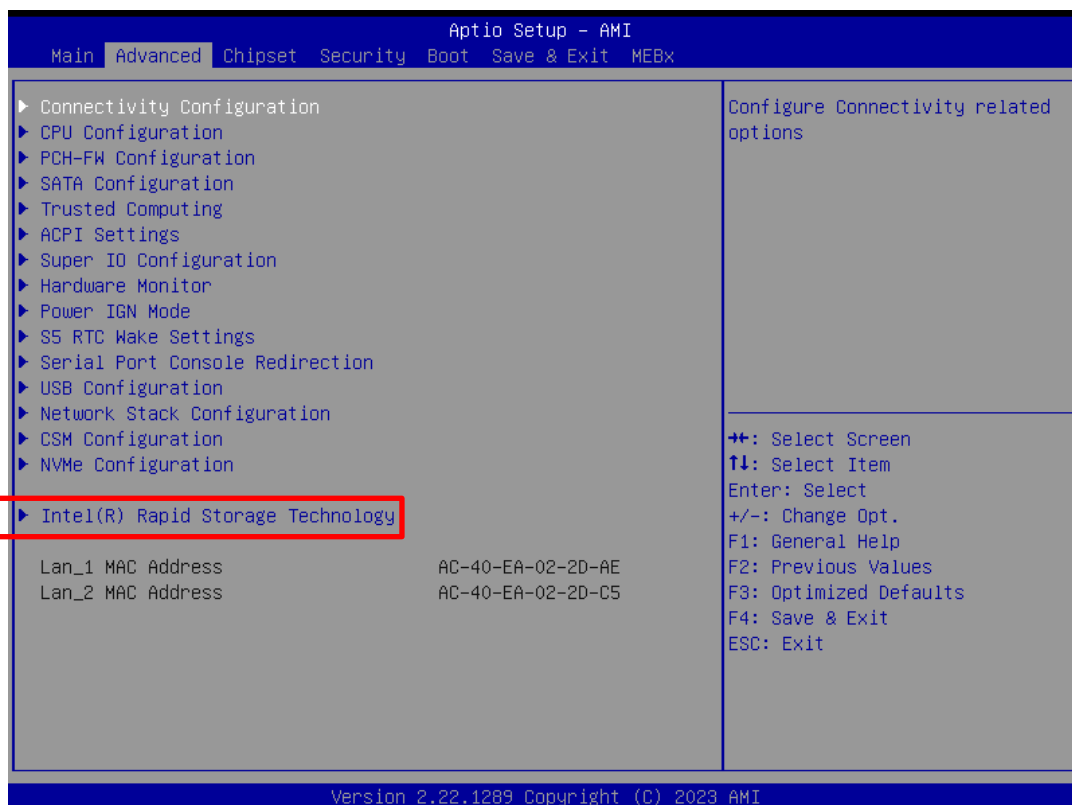

3. Into Intel(R) Rapid Storage Technology, and start create RAID volume.

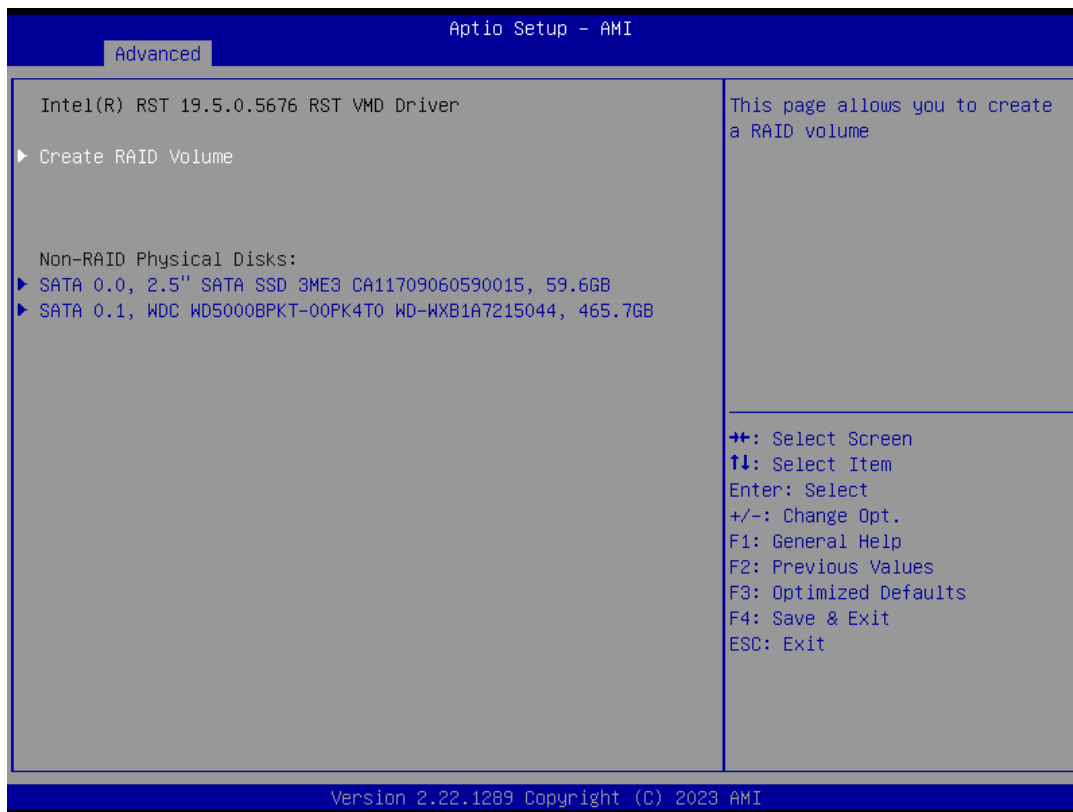

4. Start Create the RAID




- Select Disk that you want to do the RAID
- Select [x]; No-Select []

4.3.6 Trusted Computing



Item	Options	Description
Security Device Support	Enabled, Disabled [Default] ,	Enable/Disable BIOS support for security device. O.S. will not show Security Device.TCG EFI protocol and INT1A interface will not be available.
Pending operation	None [Default] , TPM Clear	Schedule an Operation for the Security Device. NOTE: Your Computer will reboot during restart in order to change State of Security Device.


4.3.7 ACPI Settings

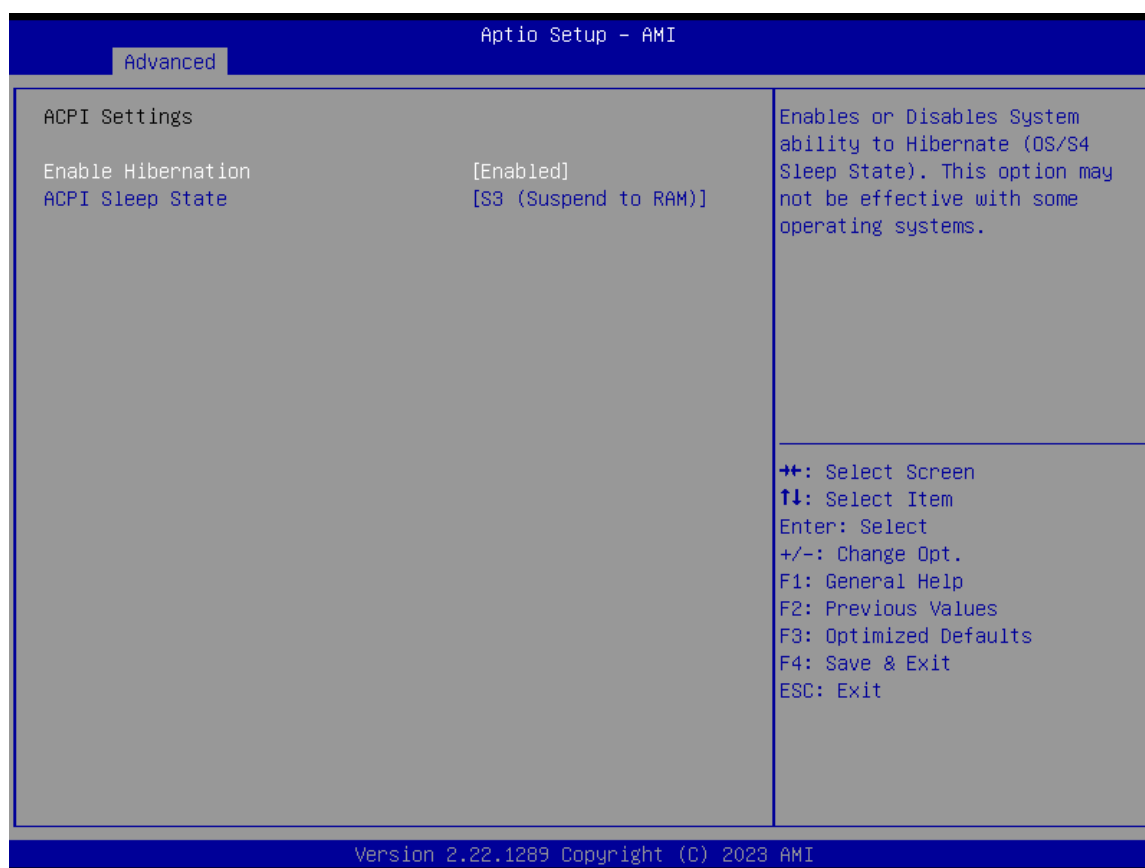

Item	Options	Description
Enable Hibernation	Disabled , Enabled[Default],	Enables or Disables System ability to Hibernation (OS/S4 Sleep State). This option may not be effective with some operating systems.
ACPI Sleep State	Suspend Disabled, S3 (Suspend to RAM)[Default]	Select the highest ACPI sleep state the system will enter when the SUSPEDN button is pressed.

4.3.8 Super IO Configuration


This setting allows you to select options for the Super IO Configuration, and change the value of the selected option.

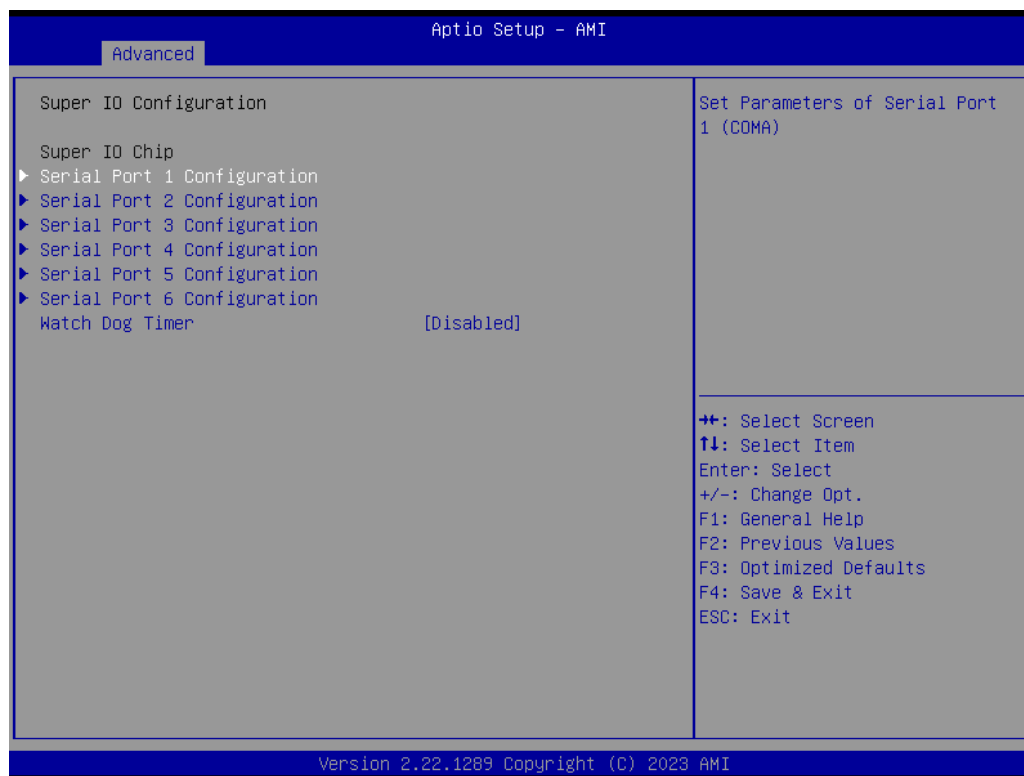

Item	Description
Serial Port 1 Configuration	Set Parameters of Serial Port 1 (COMA).
Serial Port 2 Configuration	Set Parameters of Serial Port 2 (COMB).
Serial Port 3 Configuration	Set Parameters of Serial Port 3 (COMC).
Serial Port 4 Configuration	Set Parameters of Serial Port 4 (COMD).
Serial Port 5 Configuration	Set Parameters of Serial Port 5 (COME).
Serial Port 6 Configuration	Set Parameters of Serial Port 6 (COMF).


Item	Options	Description
Watch Dog Timer	Disabled [Default] , Enabled	Enabled or Disabled Watch Dog Timer function.
Watch Dog Timer Count Mode	Second Mode [Default] , Minute Mode	Select Second Mode or Minute Mode.
Watch Dog Timer Time out Value	20~255(Second) [Default] , 1~255(Minute)	Watch Dog Timer Time out Value.

Serial Port 1 Configuration

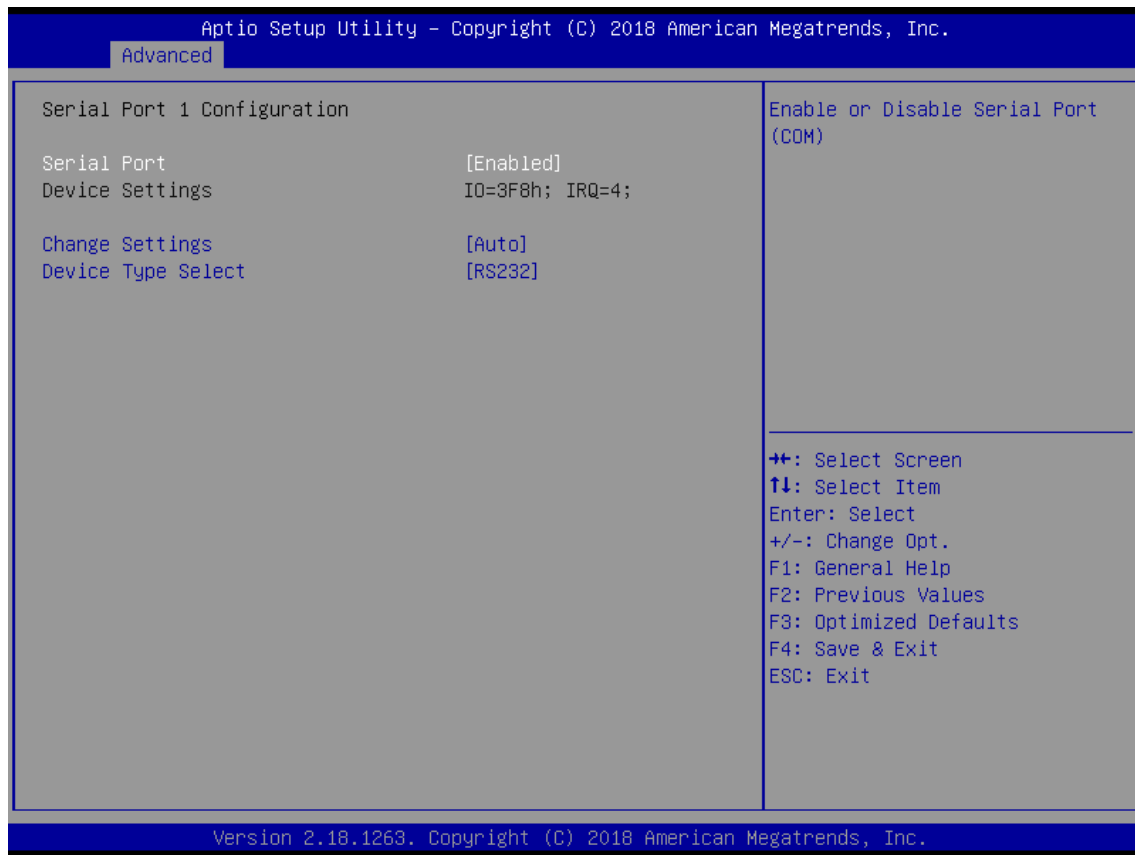


Item	Options	Description
Serial Port	Disabled, Enabled[Default]	Enable or Disable Serial Port (COM).
Change Settings	Auto[Default], IO=3F8h; IRQ=4; , IO=3F8h; IRQ=3,4,5,6,7,9,10,11,12; , IO=2F8h; IRQ=3,4,5,6,7,9,10,11,12;; IO=3E8h; IRQ=3,4,5,6,7,9,10,11,12;; IO=2E8h; IRQ=3,4,5,6,7,9,10,11,12;	This item allows you to change the address & IRQ settings of the specified serial port.
Device Type Select	UART 232[Default], UART 422, UART 485	Set the Serial Port to RS232 & RS422 & RS485
RS-485 Auto Flow Function	Disabled, Enabled[Default]	Enabled/Disabled RS485 Autoflow Function

Serial Port 2 Configuration

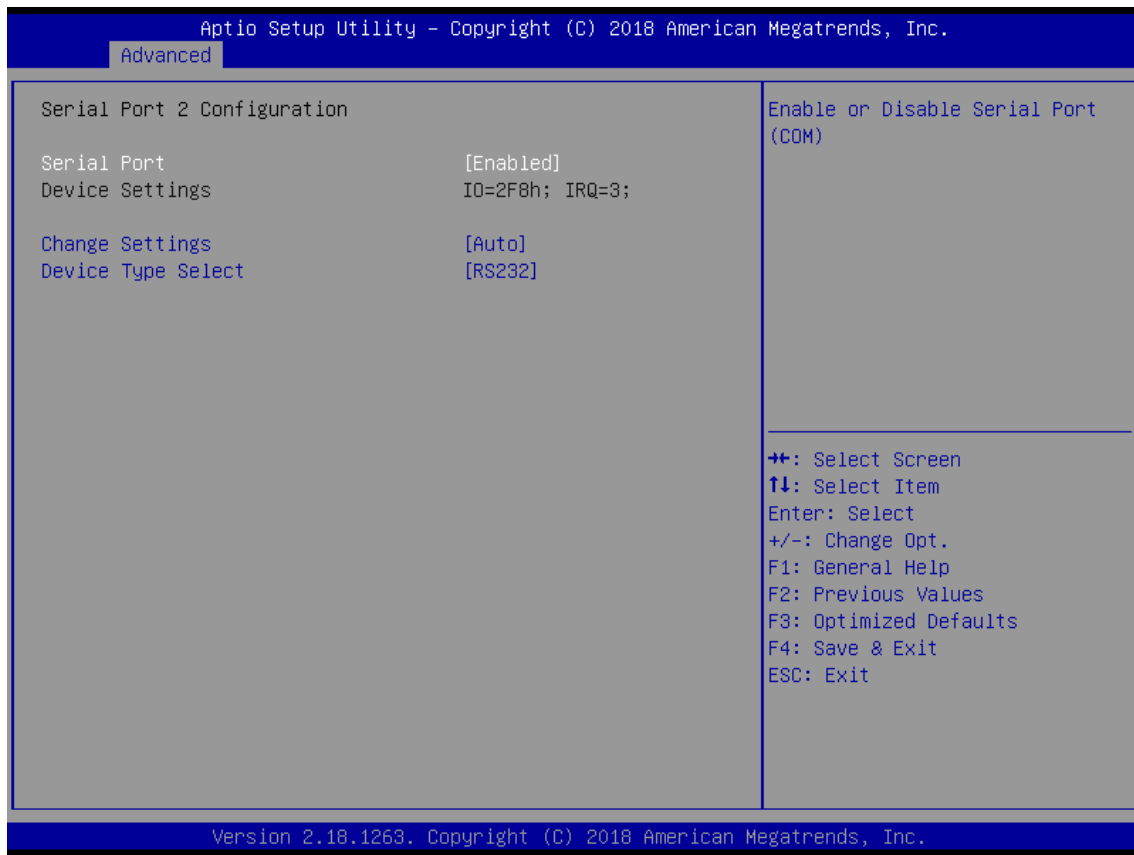


Item	Options	Description
Serial Port	Disabled, Enabled[Default]	Enable or Disable Serial Port (COM).
Change Settings	Auto[Default], IO=2F8h; IRQ=3; , IO=3F8h; IRQ=3,4,5,6,7,9,10,11,12; , IO=2F8h; IRQ=3,4,5,6,7,9,10,11,12;; IO=3E8h; IRQ=3,4,5,6,7,9,10,11,12;; IO=2E8h; IRQ=3,4,5,6,7,9,10,11,12;	This item allows you to change the address & IRQ settings of the specified serial port.
Device Type Select	UART 232[Default], UART 422, UART 485	Set the Serial Port to RS232 & RS422 & RS485
RS-485 Auto Flow Function	Disabled, Enabled[Default]	Enabled/Disabled RS485 Autoflow Function

Serial Port 3 Configuration

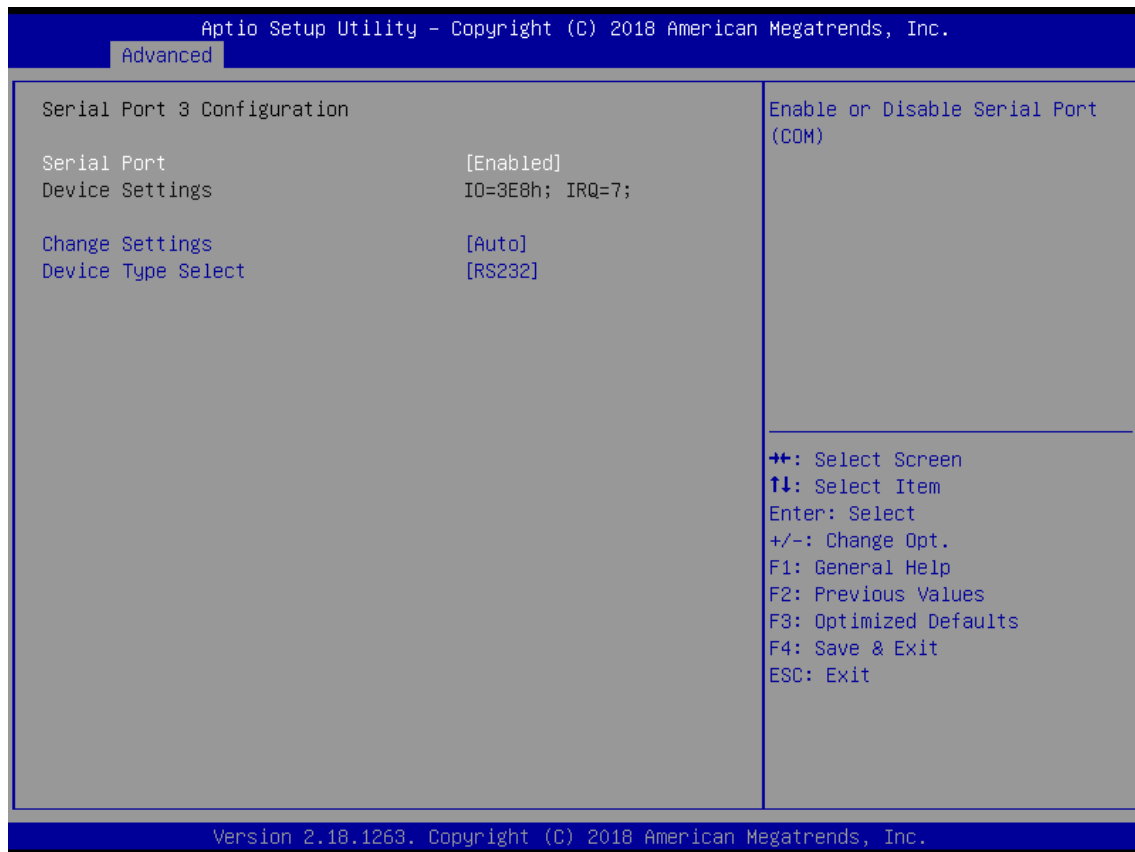


Item	Options	Description
Serial Port	Disabled, Enabled[Default]	Enable or Disable Serial Port (COM).
Change Settings	Auto[Default], IO=3E8h; IRQ=7; , IO=3E8h; IRQ=3,4,5,6,7,9,10,11,12; , IO=2E8h; IRQ=3,4,5,6,7,9,10,11,12; , IO=2F0h; IRQ=3,4,5,6,7,9,10,11,12; , IO=2E0h; IRQ=3,4,5,6,7,9,10,11,12;	This item allows you to change the address & IRQ settings of the specified serial port.
Device Type Select	UART 232[Default], UART 422, UART 485	Set the Serial Port to RS232 & RS422 & RS485
RS-485 Auto Flow Function	Disabled, Enabled[Default]	Enabled/Disabled RS485 Autoflow Function

Serial Port 4 Configuration

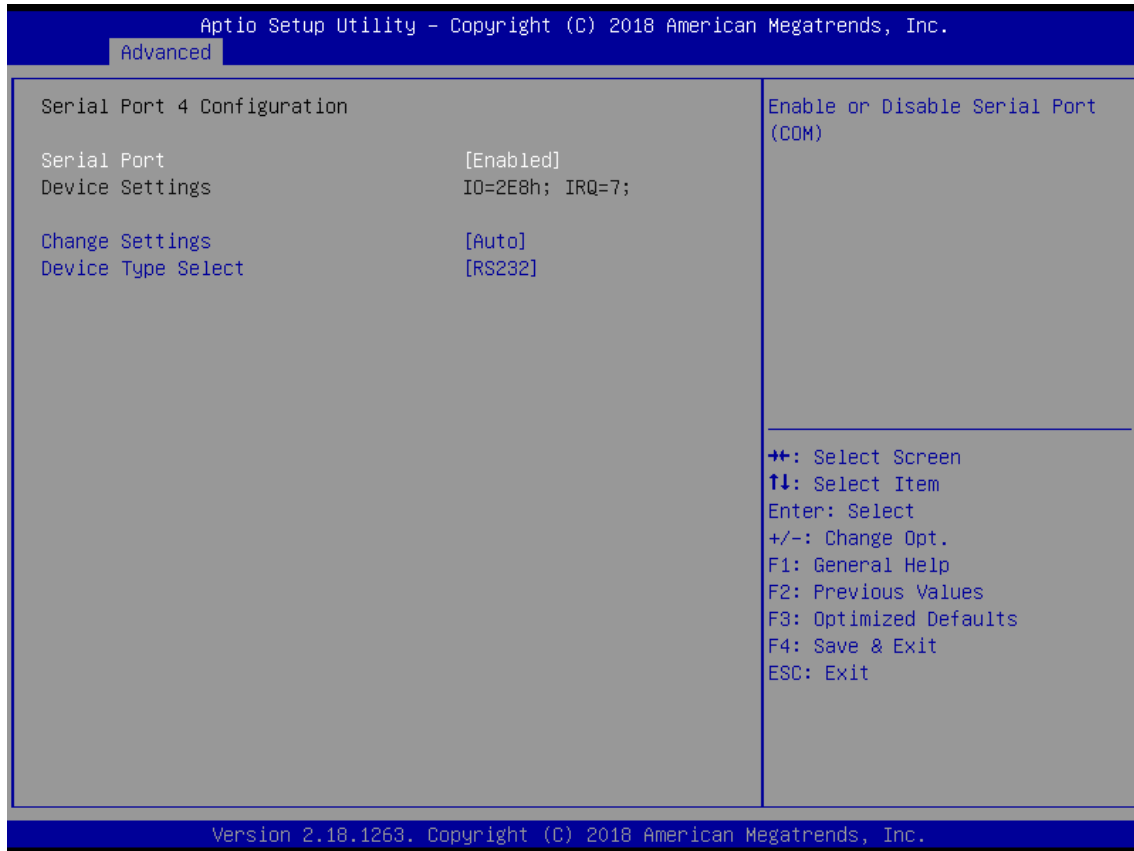


Item	Options	Description
Serial Port	Disabled, Enabled[Default]	Enable or Disable Serial Port (COM).
Change Settings	Auto[Default], IO=2E8h; IRQ=7; , IO=3E8h; IRQ=3,4,5,6,7,9,10,11,12; , IO=2E8h; IRQ=3,4,5,6,7,9,10,11,12; , IO=2F0h; IRQ=3,4,5,6,7,9,10,11,12; , IO=2E0h; IRQ=3,4,5,6,7,9,10,11,12;	This item allows you to change the address & IRQ settings of the specified serial port.
Device Type Select	UART 232[Default], UART 422, UART 485	Set the Serial Port to RS232 & RS422 & RS485
RS-485 Auto Flow Function	Disabled, Enabled[Default]	Enabled/Disabled RS485 Autoflow Function

Serial Port 5 Configuration

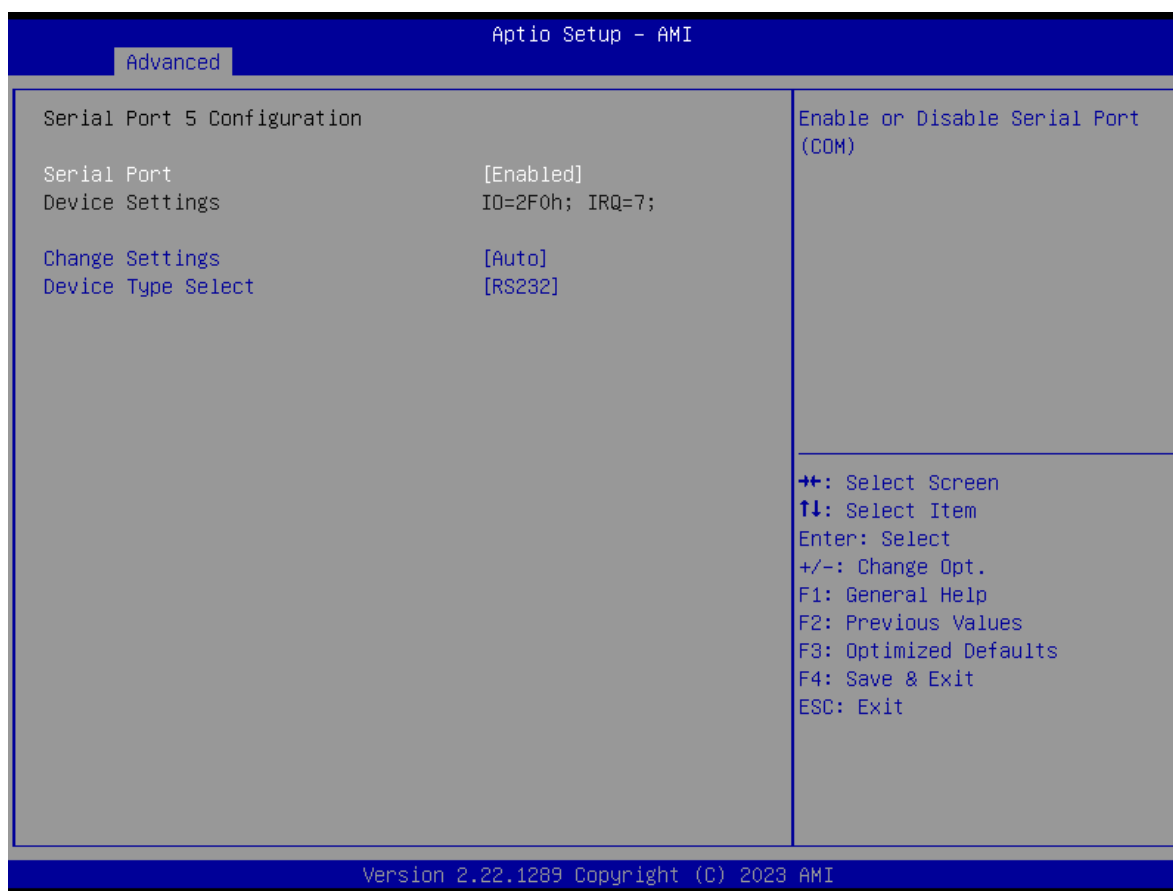

Item	Options	Description
Serial Port	Disabled, Enabled[Default]	Enable or Disable Serial Port (COM).
Change Settings	Auto[Default], IO=2F0h; IRQ=7; , IO=3E8h; IRQ=3,4,5,6,7,9,10,11,12; , IO=3E8h; IRQ=3,4,5,6,7,9,10,11,12;; IO=2F0h; IRQ=3,4,5,6,7,9,10,11,12;; IO=2E0h; IRQ=3,4,5,6,7,9,10,11,12;	This item allows you to change the address & IRQ settings of the specified serial port.
Device Type Select	UART 232[Default], UART 422, UART 485	Set the Serial Port to RS232 & RS422 & RS485
RS-485 Auto Flow Function	Disabled, Enabled[Default]	Enabled/Disabled RS485 Autoflow Function


Serial Port 6 Configuration

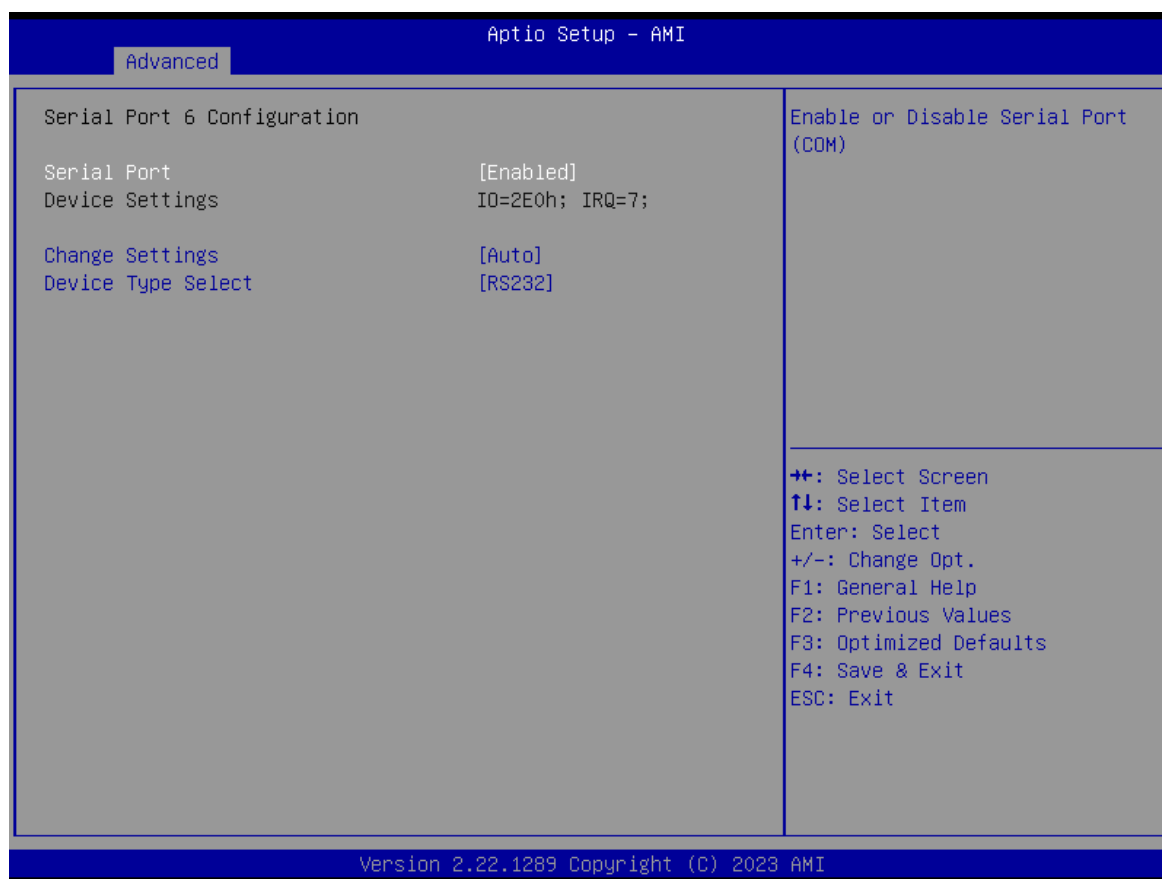

Item	Options	Description
Serial Port	Disabled, Enabled[Default]	Enable or Disable Serial Port (COM).
Change Settings	Auto[Default], IO=2E0h; IRQ=7; , IO=3E8h; IRQ=3,4,5,6,7,9,10,11,12; , IO=3E8h; IRQ=3,4,5,6,7,9,10,11,12;; IO=2F0h; IRQ=3,4,5,6,7,9,10,11,12;; IO=2E0h; IRQ=3,4,5,6,7,9,10,11,12;	This item allows you to change the address & IRQ settings of the specified serial port.
Device Type Select	UART 232[Default], UART 422, UART 485	Set the Serial Port to RS232 & RS422 & RS485
RS-485 Auto Flow Function	Disabled, Enabled[Default]	Enabled/Disabled RS485 Autoflow Function
RS-422/RS-485 Terminal Function	Disabled, Enabled[Default]	RS-422/RS-485 Terminal Function


4.3.9 Hardware Monitor

These items display the current status of all monitored hardware devices/ components such as voltages and temperatures.

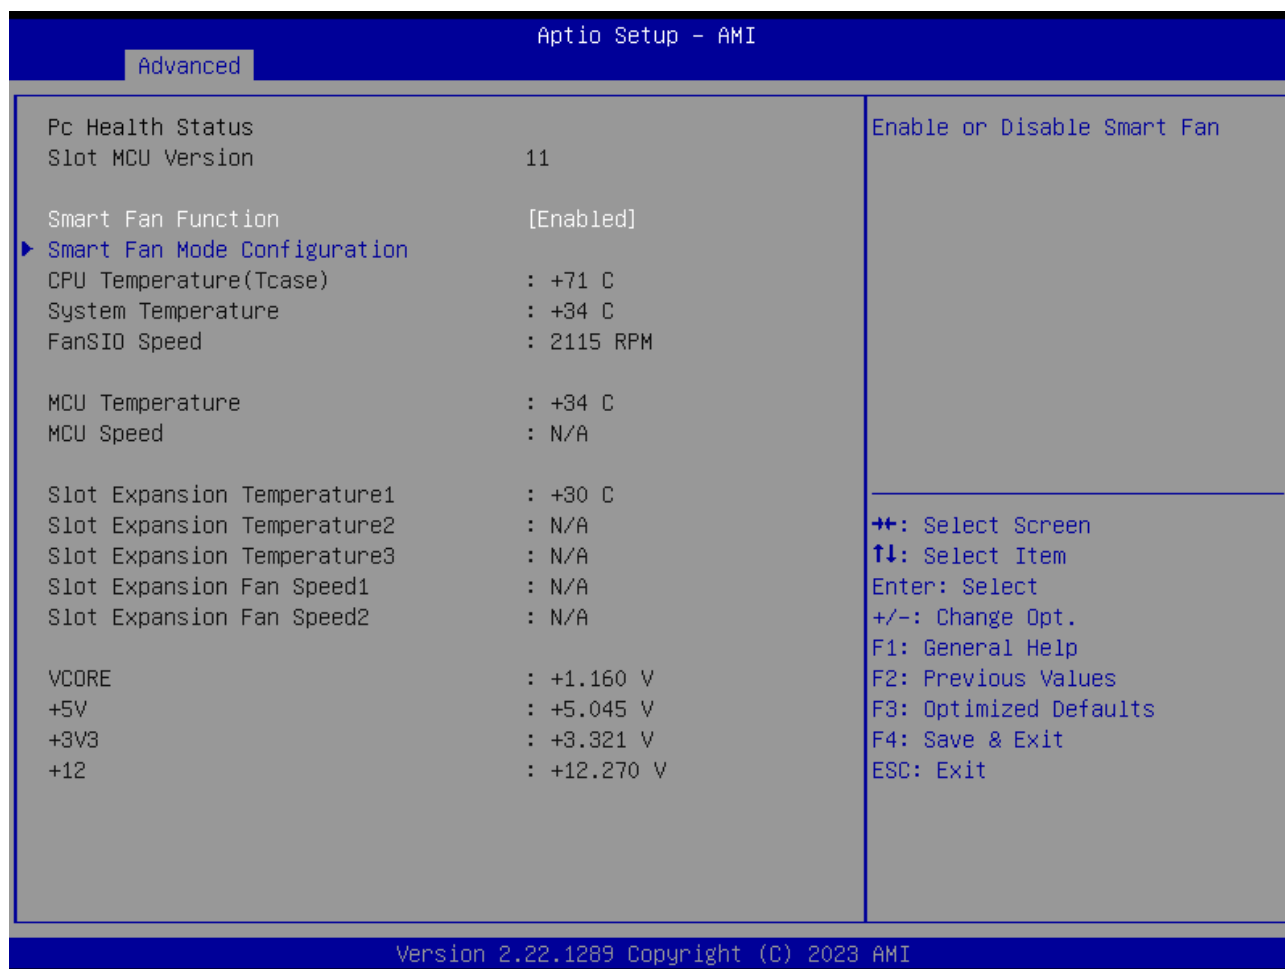


Item	Options	Description
Smart Fan Function	Disabled[Default], Enabled	Enabled or Disable Smart Fan

Smart Fan Mode Configuration

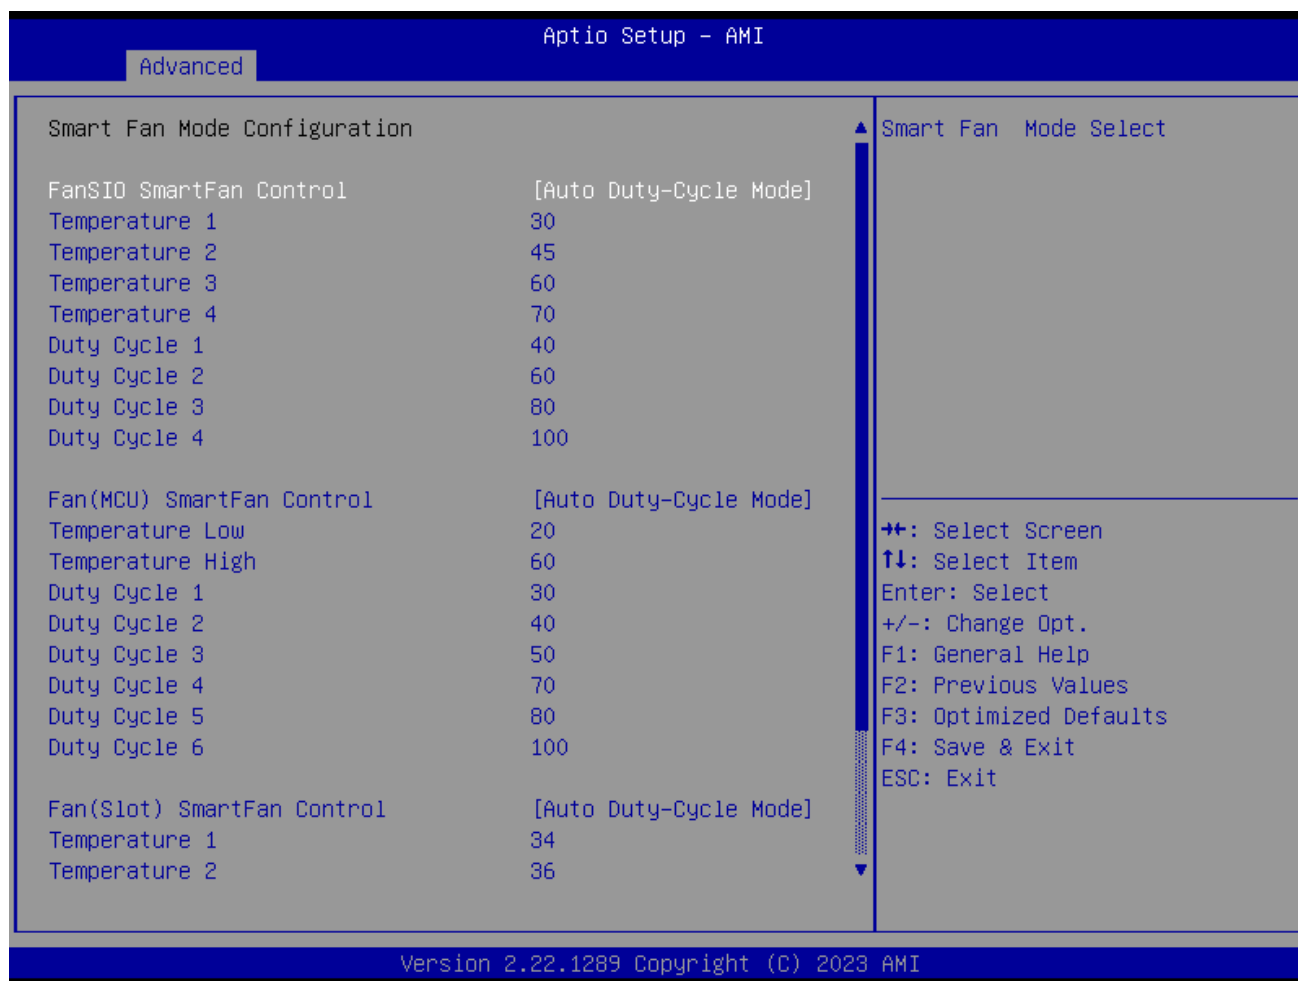

Item	Options	Description
FanSIO SmartFan Control	Manual Mode, Auto Duty-Cycle Mode[Default],	Smart Fan Mode Select
Temperature 1~4	1~100	Auto fan speed control. Temperature 1-100
Duty Cycle 1~4	20~100	Auto fan speed control. Duty 20-100

4.3.10. Power IGN Mode

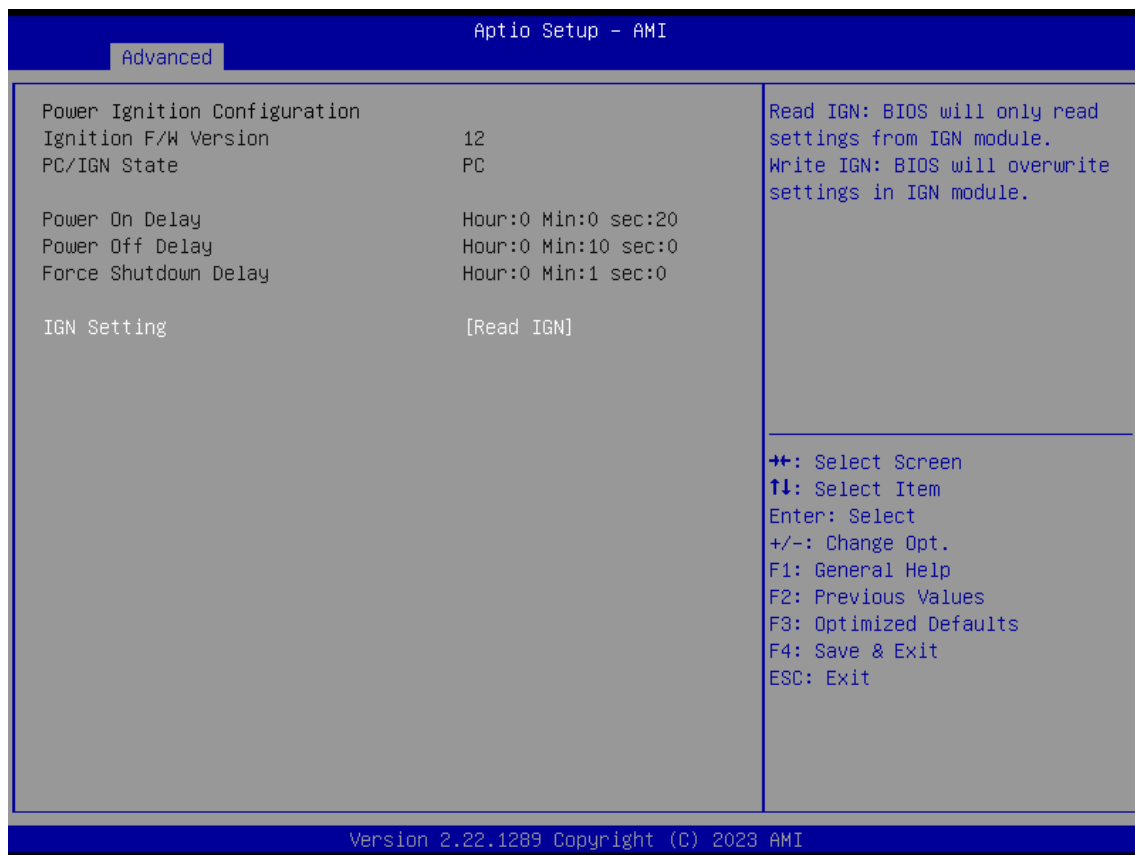

Item	Options	Description
IGN Setting	Read mode[Default] Write IGN	Read IGN: BIOS will only read settings from IGN module. Write IGN: BIOS will overwrite settings in IGN module.
Power On Delay	10 Sec[Default] 20 Sec 30 Sec 40 Sec 50 Sec 1 Min Manual Mode	Power On Delay Select
Manual Mode	10 Sec[Default]	10~60 Sec
Power Off Delay	3 Sec[Default], 1 Min, 5 Min, 10 Min, 30 Min, 1 Hour, 2 Hour, Manual Mode	Power Off Delay Select
Manual Mode	3 Sec[Default]	3~7200 Sec

4.3.11. Wake system from S5




Item	Options	Description
Wake system from S5	Disabled[Default], Fixed Time, Dynamic Time, ByPass	Enable or disable System wake on alarm event. Select FixedTime, system will wake on the hr::min::sec specified. Select DynamicTime, System will wake on the current time + Increase minute(s), Bypass : BIOS will not control RTC wake function during system shutdown
Wake up day	0[Default]	Date (of month) Alarm (0 is mean daily or you can setup a specific month)
Wake up hour	0[Default]	select 0-23 For example enter 3 for 3am and 15 for 3pm
Wake up minute	0[Default]	select 0-59 for Minute
Wake up second	0[Default]	select 0-59 for Second
Wake up minute increase	0[Default]	1 - 5

4.3.12 Serial Port Console Redirection




Item	Options	Description
Console Redirection	Disabled[Default], Enabled	These items allows you to enable or disable COM1 console redirection

4.3.13 USB Configuration

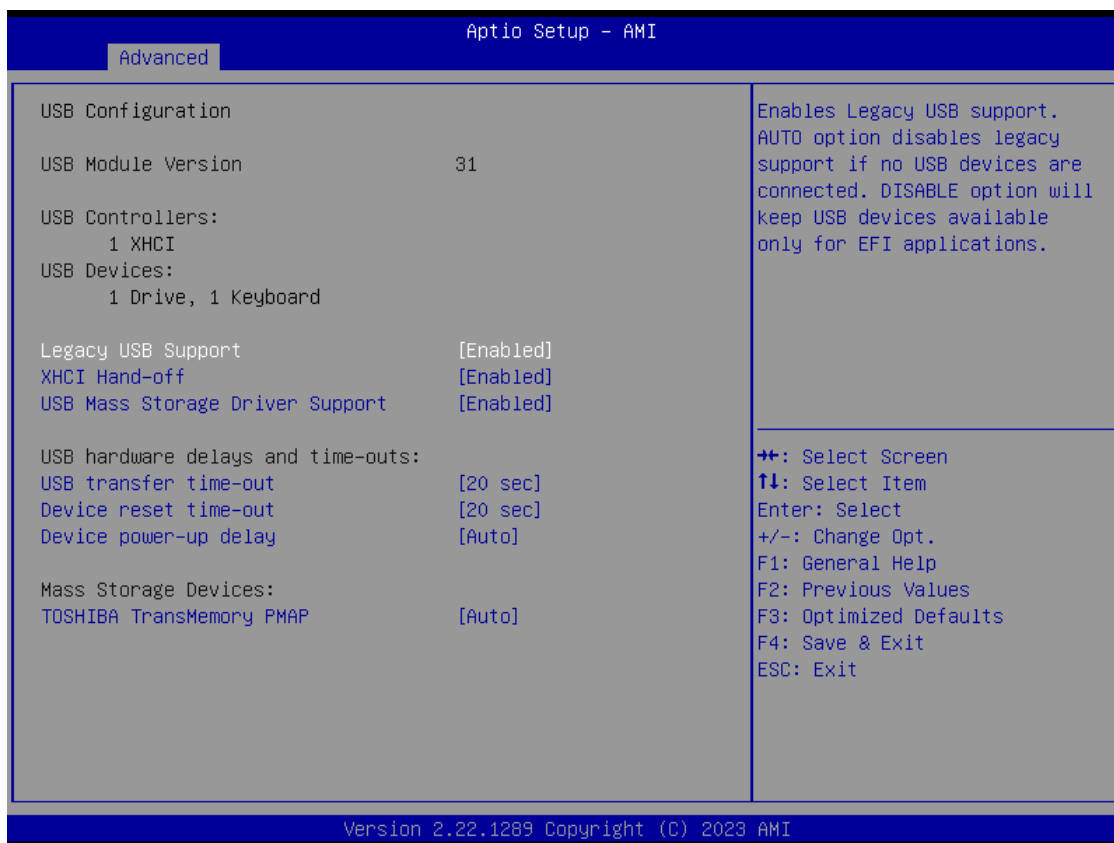


Item	Options	Description
Legacy USB Support	Enabled[Default] Disabled Auto	Enables Legacy USB support. AUTO option disables legacy support if no USB devices are connected. DISABLE option will keep USB devices available only for EFI applications.
XHCI Hand-off	Enabled[Default] Disabled	This is a workaround for OS without XHCI hand-off support. The XHCI ownership change should be claimed by XHCI driver.
USB Mass Storage Driver Support	Enabled[Default] Disabled	Enable/Disable USB Mass Storage Driver Support.
USB transfer time-out	1 sec , 5 sec , 10 sec , 20 sec[Default]	The time-out value for Control, Bulk, and Interrupt transfers.
Device reset time-out	10 sec , 20 sec[Default] , 30 sec, 40 sec	USB mass storage device Start Unit command time-out.
Device power-up delay	Auto[Default] Manual	Maximum time the device will take before it properly reports itself to the Host Controller. 'Auto' uses default value: for a Root port it is 100ms, for a Hub port the delay is taken from Hub descriptor.

4.3.14 Network Stack Configuration

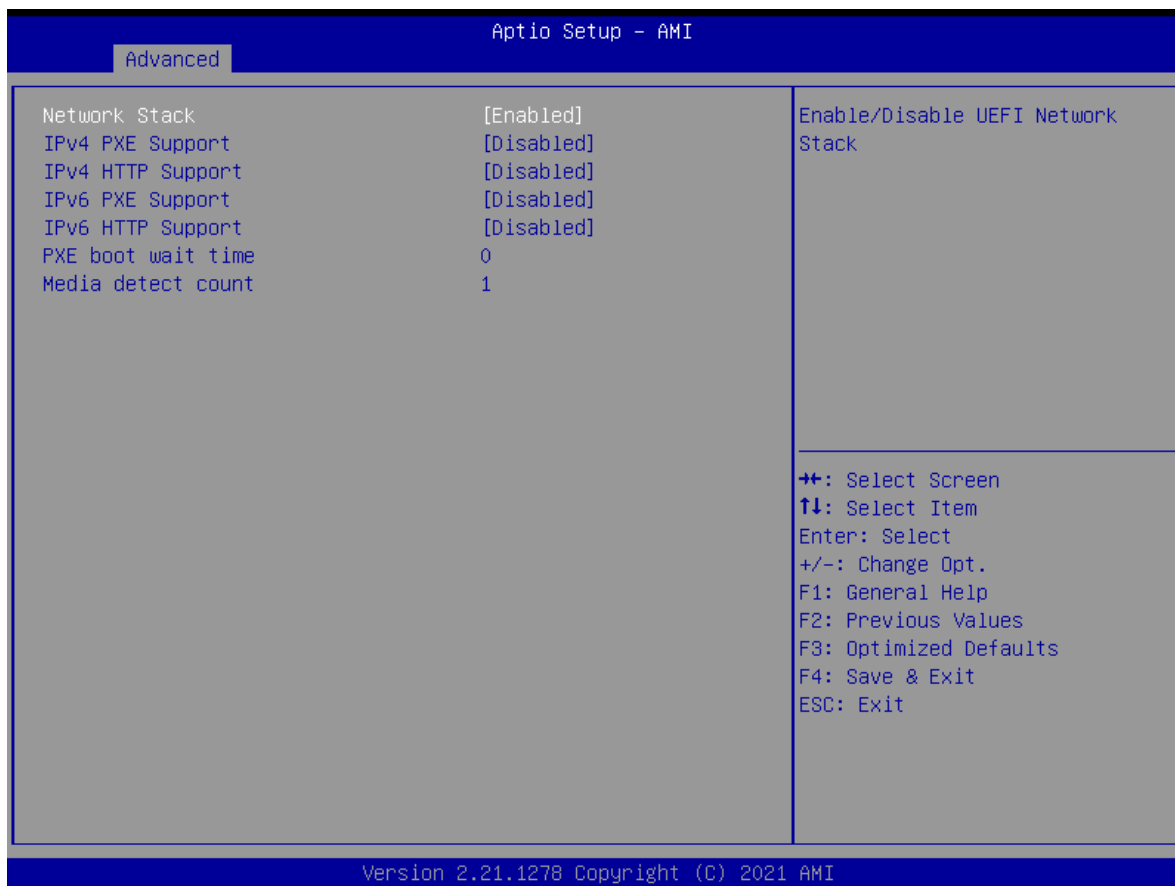

Item	Options	Description
Network Stack	Disabled [Default] , Enabled	Enable/Disable UEFI Network Stack.
IPv4 PXE Support	Disabled [Default] , Enabled	Enable/Disable IPv4 PXE boot support. If disabled, IPv4 PXE boot support will not be available.
IPv4 HTTP Support	Disabled [Default] , Enabled	Enable/Disable IPv4 HTTP boot support. If disabled, IPv4 HTTP boot support will not be available.
IPv6 PXE Support	Disabled [Default] , Enabled	Enable/Disable IPv4 PXE boot support. If disabled, IPv6 PXE boot support will not be available.
IPv6 HTTP Support	Disabled [Default] , Enabled	Enable/Disable IPv6 HTTP boot support. If disabled, IPv6 HTTP boot support will not be available.
PXE boot wait time	0[Default]	Wait time in seconds to press ESC key to abort the PXE boot. Use either +/- or numeric keys to set the value.
Media detect count	1[Default]	Number of times the presence of media will be checked. Use either +/- or numeric keys to set the value.

4.3.15 CSM Configuration

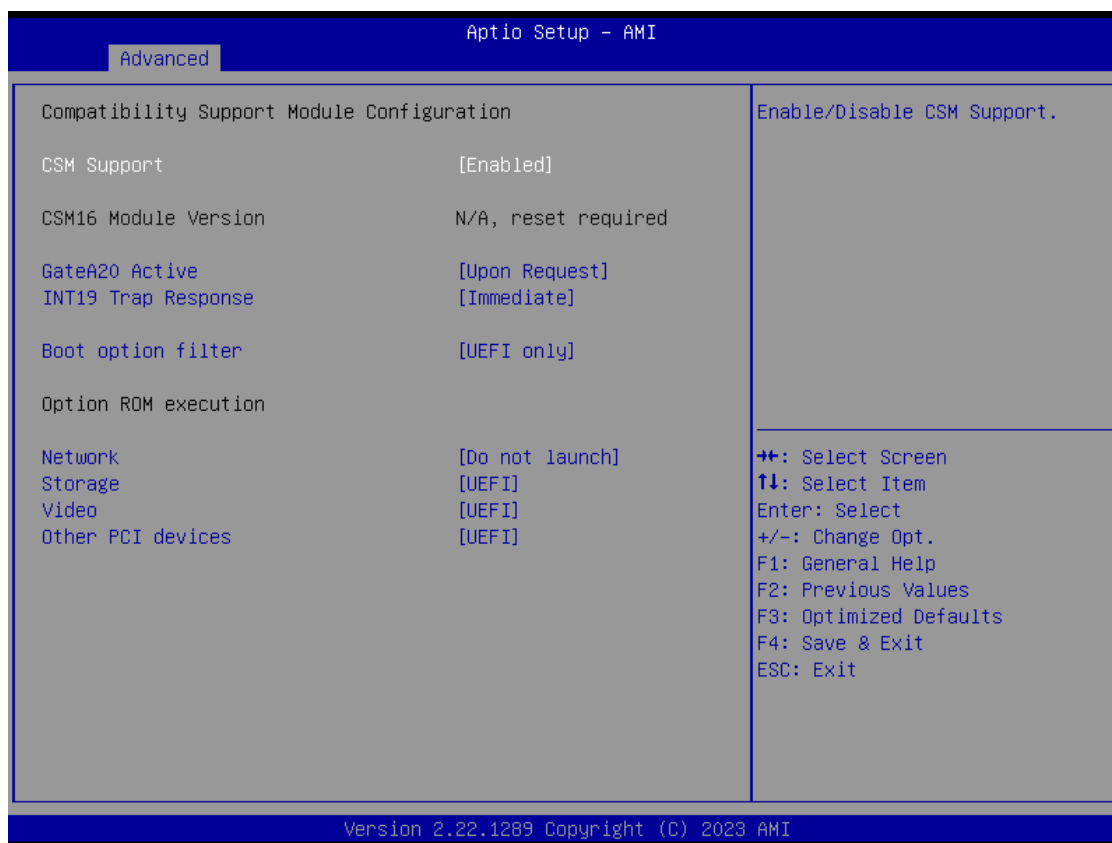

Item	Options	Description
CSM Support	Disabled[Default] , Enabled	This item allows users to enable or disable for "CSM Support".
GateA20 Active	Upon Request[Default] , Always	This item allows users to set Upon Request or Always for "GateA20 Active".
INT19 Trap Response	Immediate[Default] , Immediate	This item allows users to set the BIOS reaction to INT19 trapping by Option ROM: "Immediate" - execute the trap right away; "postponed" - execute the trap during legacy boot.
Boot option filter	UEFI and Legacy, Legacy only, UEFI only[Default]	This item allows users to select which type of operating system to boot by option. This item is configurable only when CSM Support is set to Enabled.
Network PXE	Do not launch[Default] , UEFI, Legacy	Controls the execution of UEFI and Legacy Video OpROM.
Storage	Do not launch, UEFI[Default] , Legacy	Controls the execution of UEFI and Legacy Storage OpROM.
Other PCI devices	Do not launch, UEFI[Default] , Legacy	Determines OpROM execution policy for devices other than Network, Storage, or Video.

4.3.16 NVMe Configuration



4.4 Chipset

This section allows you to configure and improve your system and allows you to set up some system features according to your preference.



4.4.1 System Agent (SA) Configuration




Item	Options	Description
Above 4GB MMIO BIOS assignment	Enabled, Disabled[Default]	Enable/Disable above 4GB MemoryMappedIO BIOS assignment This is enabled automatically when Aperture Size is set to 2048MB.

■ Memory Configuration



Item	Options	Description
Max TOLUD	Dynamic[Default], 1GB, 1.25GB, 1.5 GB, 1.75 GB, 2 GB, 2.25 GB, 2.5 GB, 2.75 GB, 3 GB, 3.25 GB, 3.5 GB	Maximum Value of TOLUD. Dynamic assignment would adjust TOLUD automatically based on largest MMIO length of installed graphic controller

■ Graphic Configuration

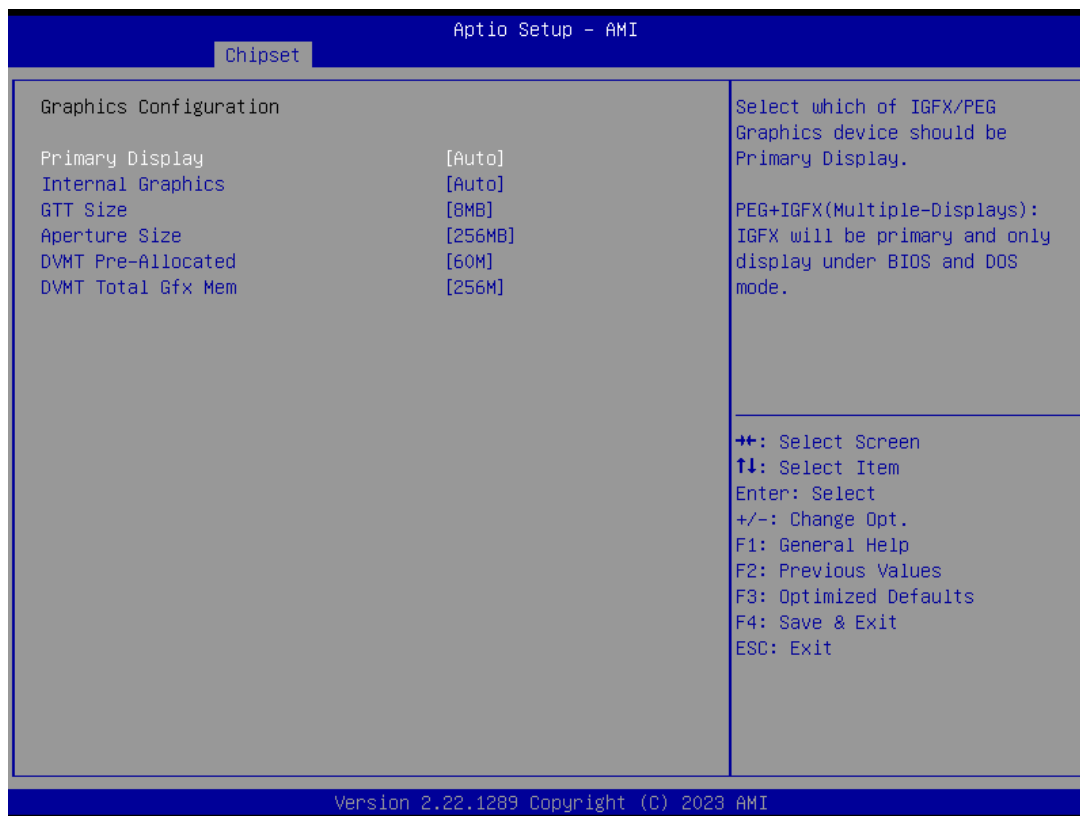


Item	Options	Description
Primary Display	Auto[Default] , PEG + IGFX	Select which of IGFX/PEG Graphics device should be Primary Display. PEG+IGFX(Multiple-Displays): IGFX will be primary and only display under BIOS and DOS mode.
Internal Graphics	Auto[Default] , Disabled, Enabled	Keep IGFX enabled based on the setup options.
GTT Size	2MB, 4MB, 8MB[Default]	Select the GTT Size .
Aperture Size	128MB, 256MB[Default] , 512MB, 1024MB	Select the Aperture Size. Note : Above 4GB MMIO BIOS assignment is automatically enabled when selecting 2048MB aperture. To use this feature, please disable CSM Support.
DVMT Pre-Allocated	32M,64M,4M,8M, 12M,16M, 20M, 24M, 28M,32M/F7, 36M, 40M,44M, 48M,52M,56M, 60M[Default]	Select DVMT 5.0 Pre-Allocated (Fixed) Graphics Memory size used by the Internal Graphics Device.
DVMT Total Gfx Mem	128M, 256M[Default] , MAX	Select DVMT5.0 Total Graphic Memory size used by the Internal Graphics Device.

■ VMD Configuration




Item	Options	Description
Enable VMD controller	Enabled[Default], Disabled	Enable/Disable to VMD controller

■ PCI Express Configuration

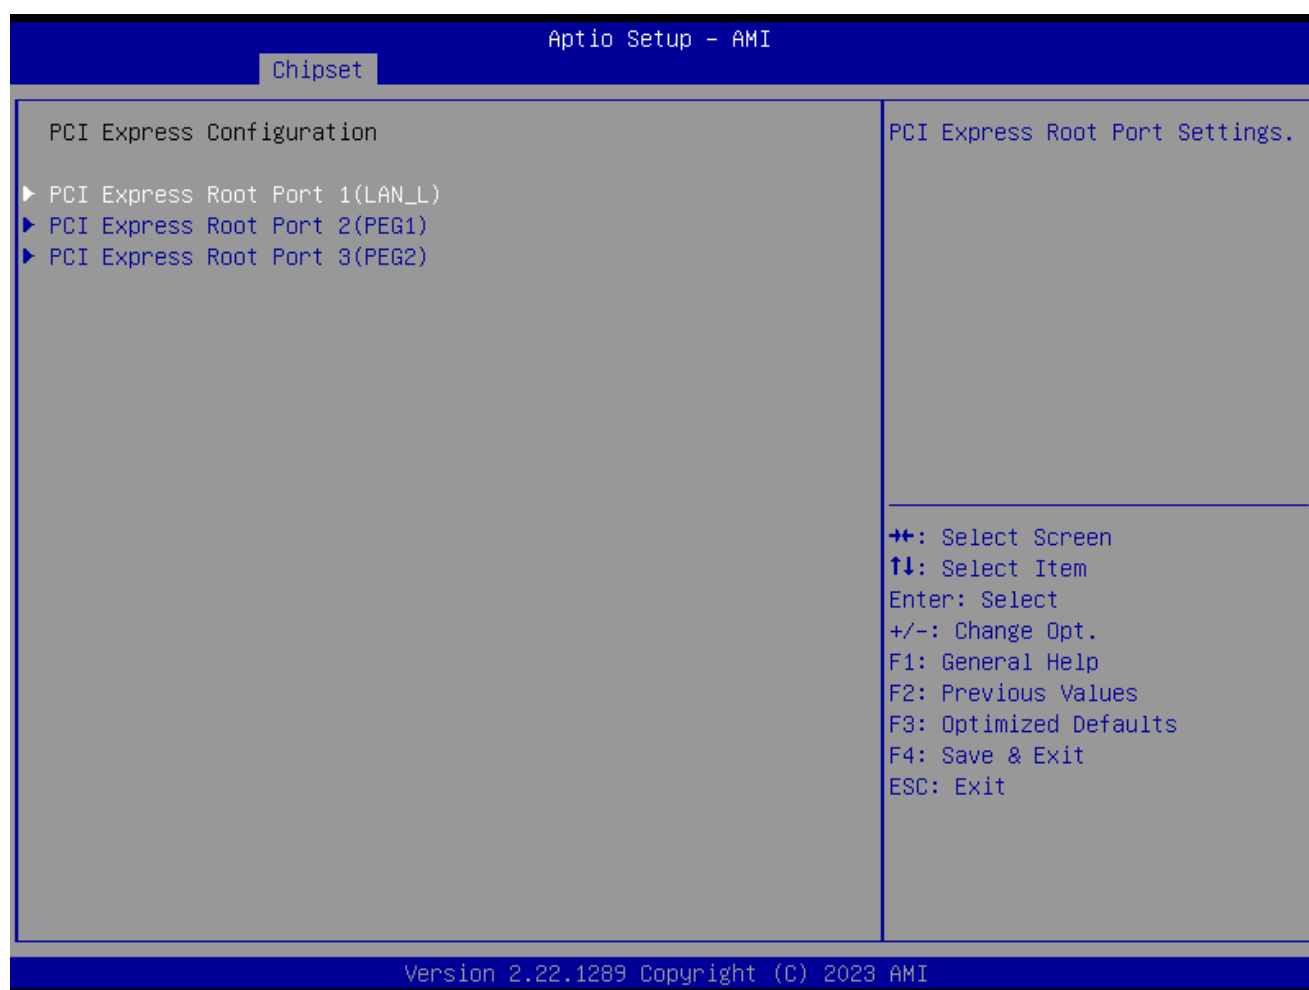


■ PCI Express Configuration

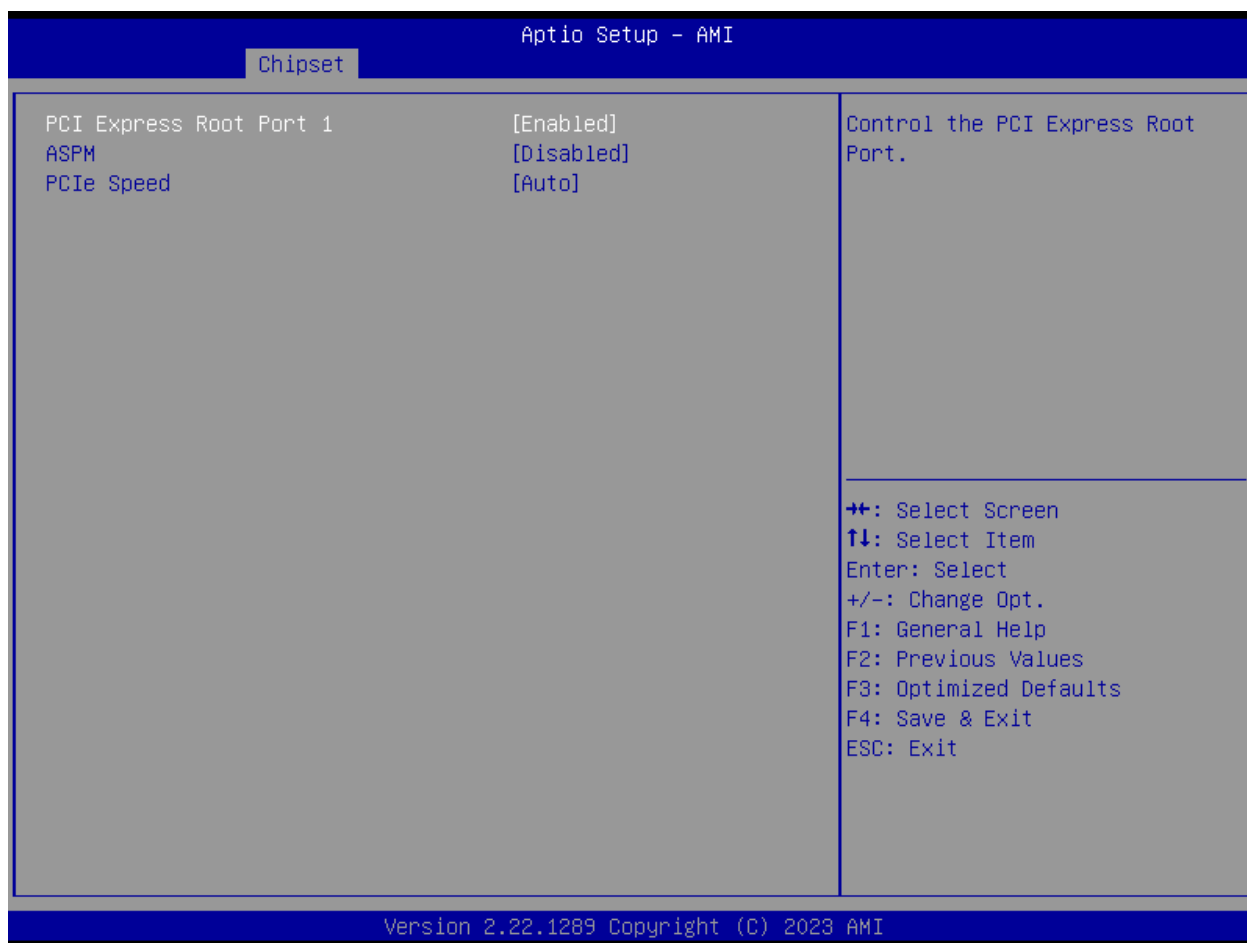


Item	Options	Description
PCI Express Root Port 1~3	Disabled, Enabled[Default] ,	Control the PCI Express Root Port.
ASPM	Disabled[Default] , L0s, L1, L0sL1	Set the ASPM Level.
PCIe Speed	Aut0[Default] , Gen1, Gen2, Gen3, Gen4, Gen5,	Configure PCIe Speed

4.4.2 PCH-IO Configuration

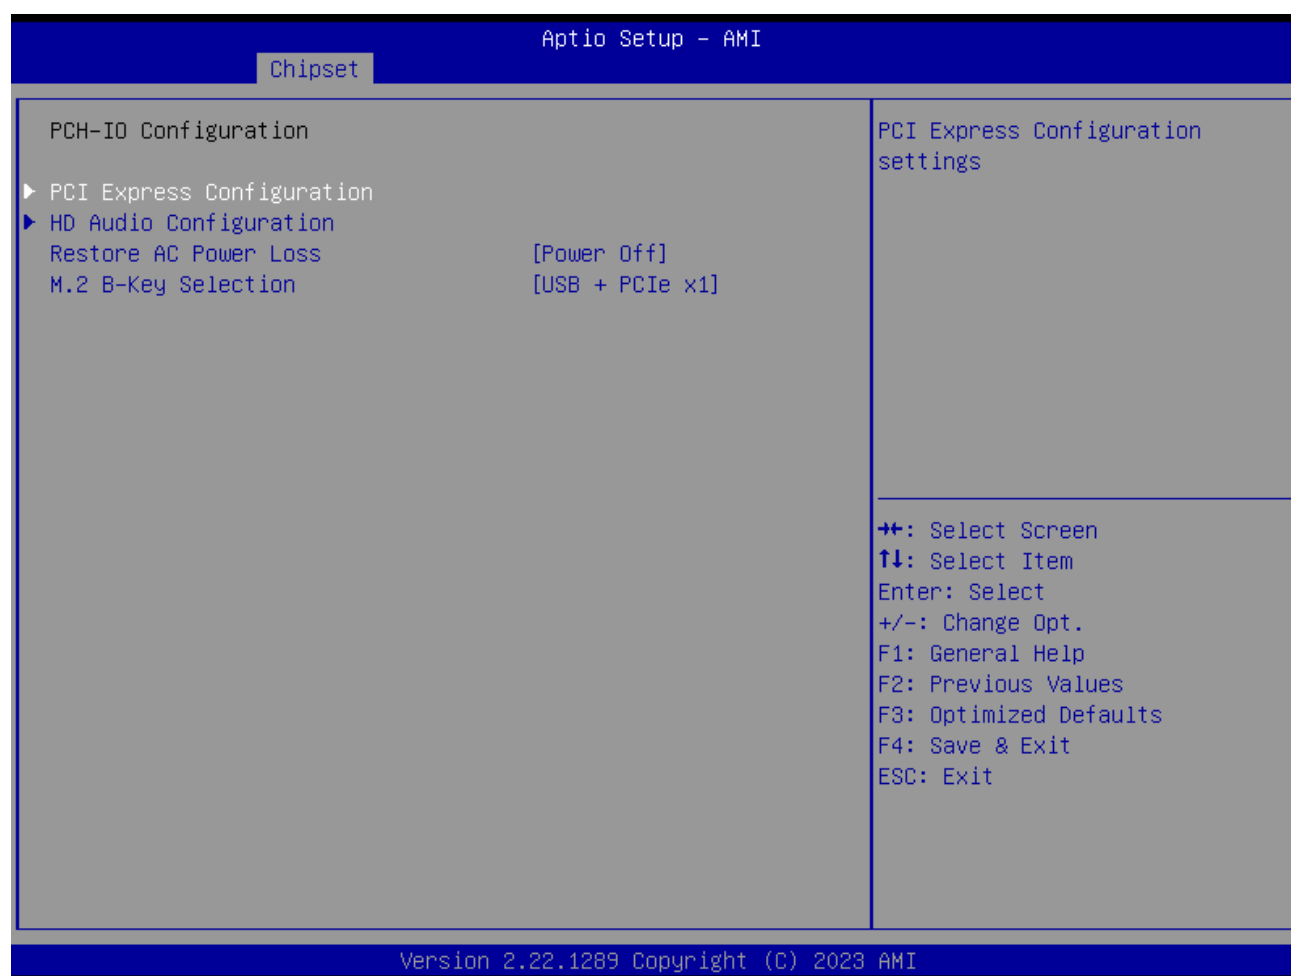


Item	Options	Description
Restore AC Power Loss	Power On, Power Off [Default] , Last State	Specify what state to go to when power is re-applied after a power failure (G3 state).
M.2 B-Key Selection	USB + PCIe x1 [Default] , PCIe x2	Selects M.2 B-KEY function: PCIe x2 or USB + PCIe x1.

■ PCI Express Configuration

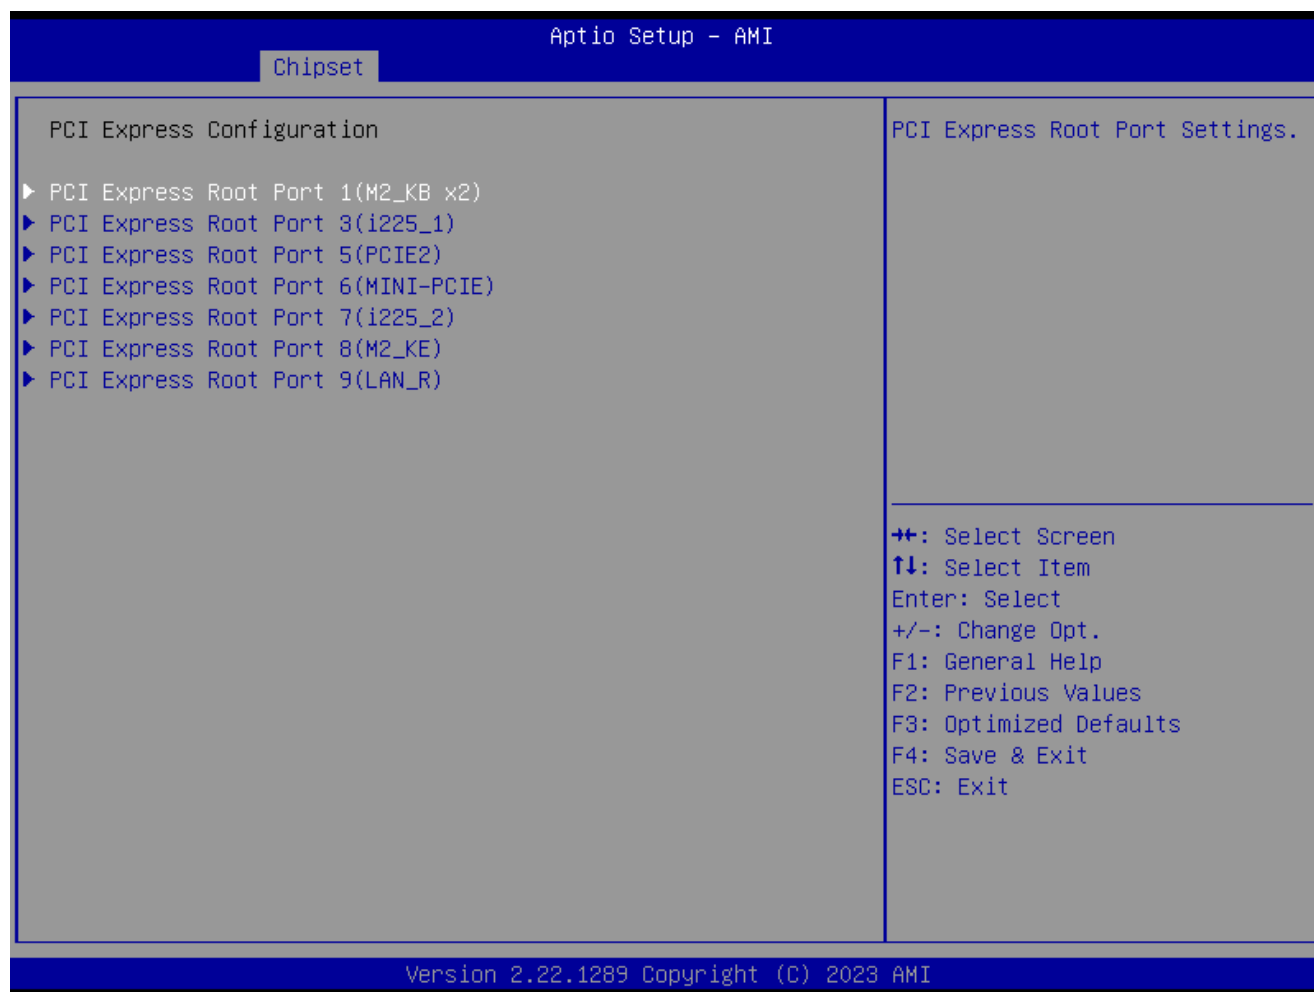


■ PCI Express Root Port 1 /3 /5 /6 /7 /8 /9

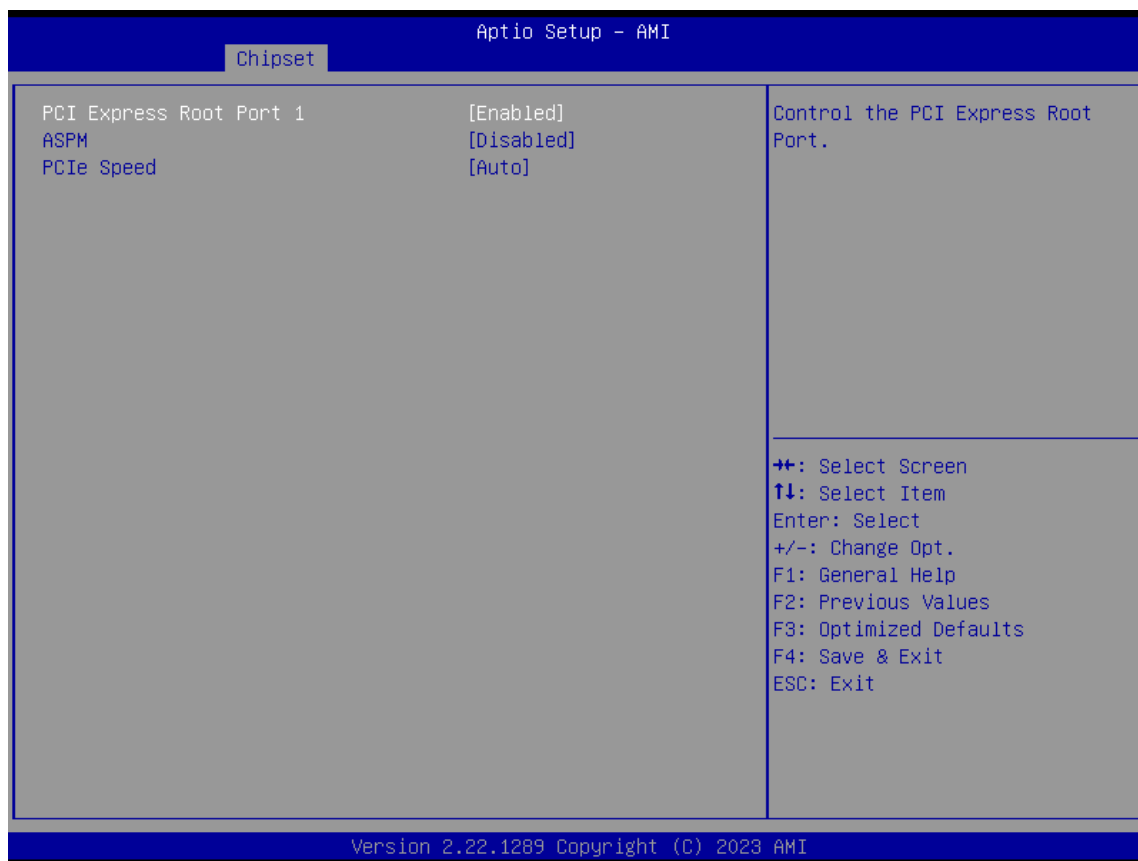

Item	Options	Description
PCI Express Root Port 1 /3 /5 /6 /7 /8 /9	Disabled, Enabled [Default]	Control the PCI Express Root Port.
ASPM	Disabled [Default] , L1, Auto	Set the ASPM Level.
PCIe Speed	Auto [Default] , Gen1, Gen2, Gen3, Gen4	Configure PCIe speed.


■ HD Audio Configuration

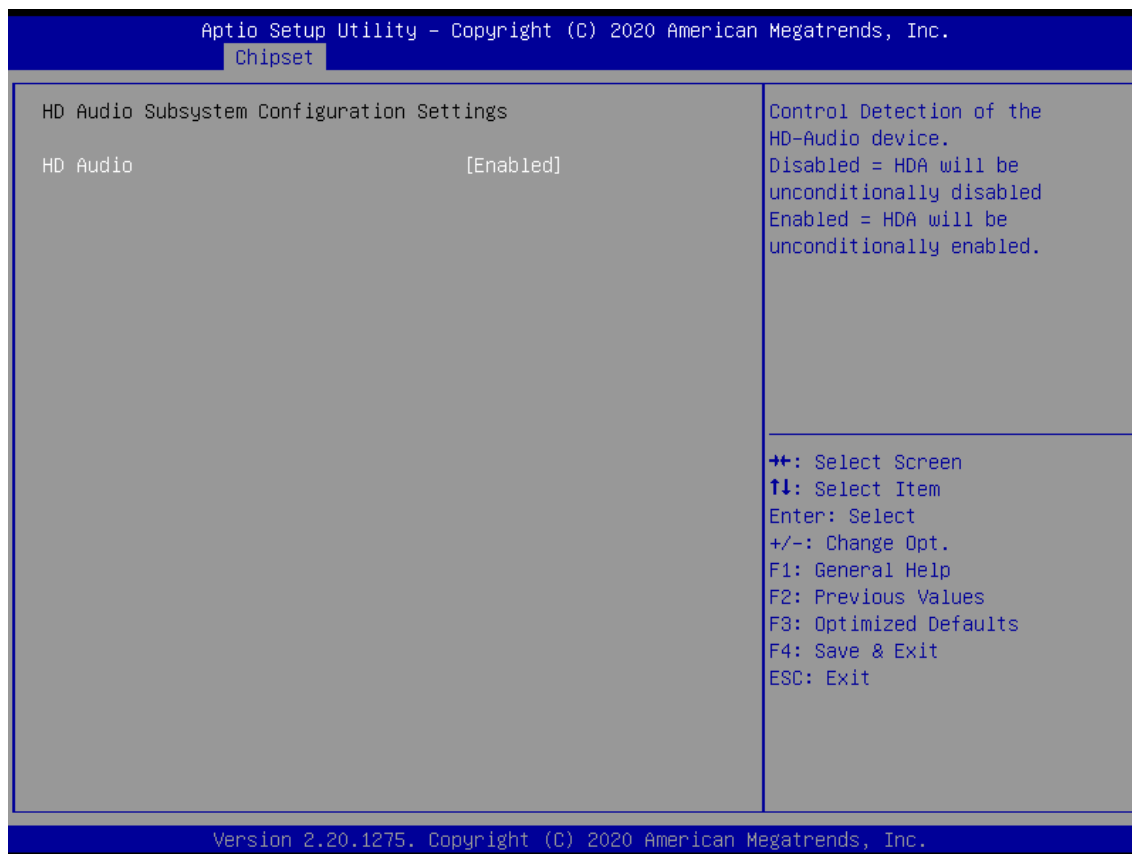

Item	Options	Description
HD Audio	Disabled, Enabled [Default]	Control Detection of the HD-Audio device. Disabled = HDA will be unconditionally disabled Enabled = HDA will be unconditionally enabled.

4.5 Security

Security menu allow users to change administrator password and user password settings.

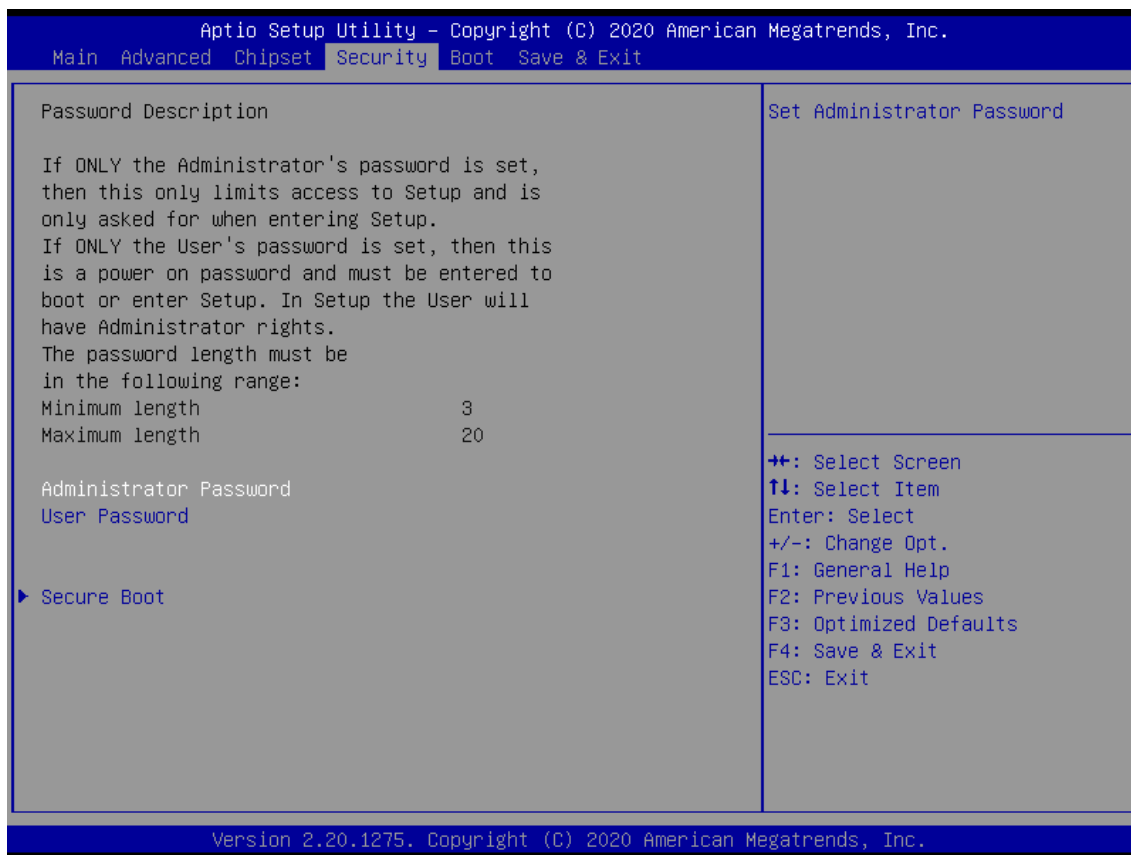

■ Administrator Password

This item allows you to set Administrator Password.

■ User Password


This item allows you to set User Password.

Security Boot



Item	Options	Description
Secure Boot	Disabled [Default] , Enabled	Secure Boot feature is Active if Secure Boot is Enabled, Platform Key(PK) is enrolled and the System is in User mode. The mode change requires platform reset
Secure Boot Mode	Standard, Custom [Default]	Secure Boot mode options: Standard or Custom. In Custom mode, Secure Boot Policy variables can be configured by a physically present user without full authentication


■ Key Management

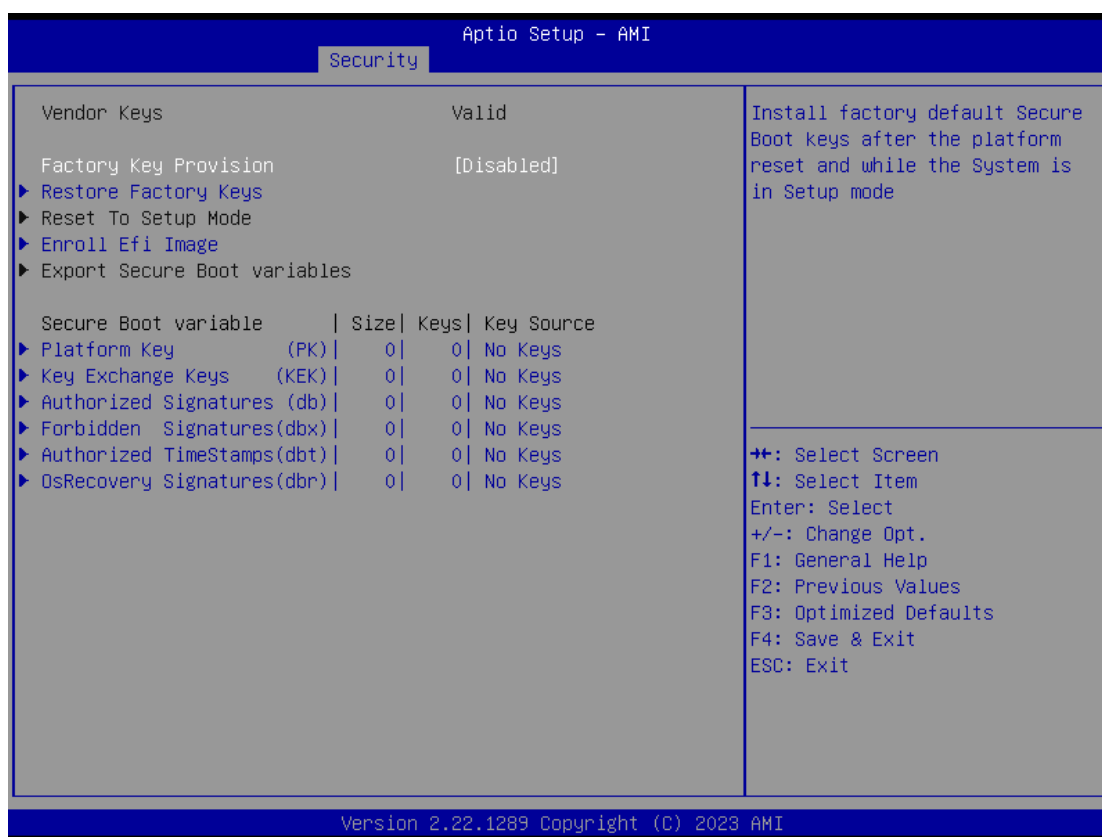

Item	Options	Description
Factory Key Provision	Disabled [Default] , Enabled	Install factory default Secure Boot keys after the platform reset and while the System is in Setup mode

4.6 Boot


This menu allows you to setup the system boot options.

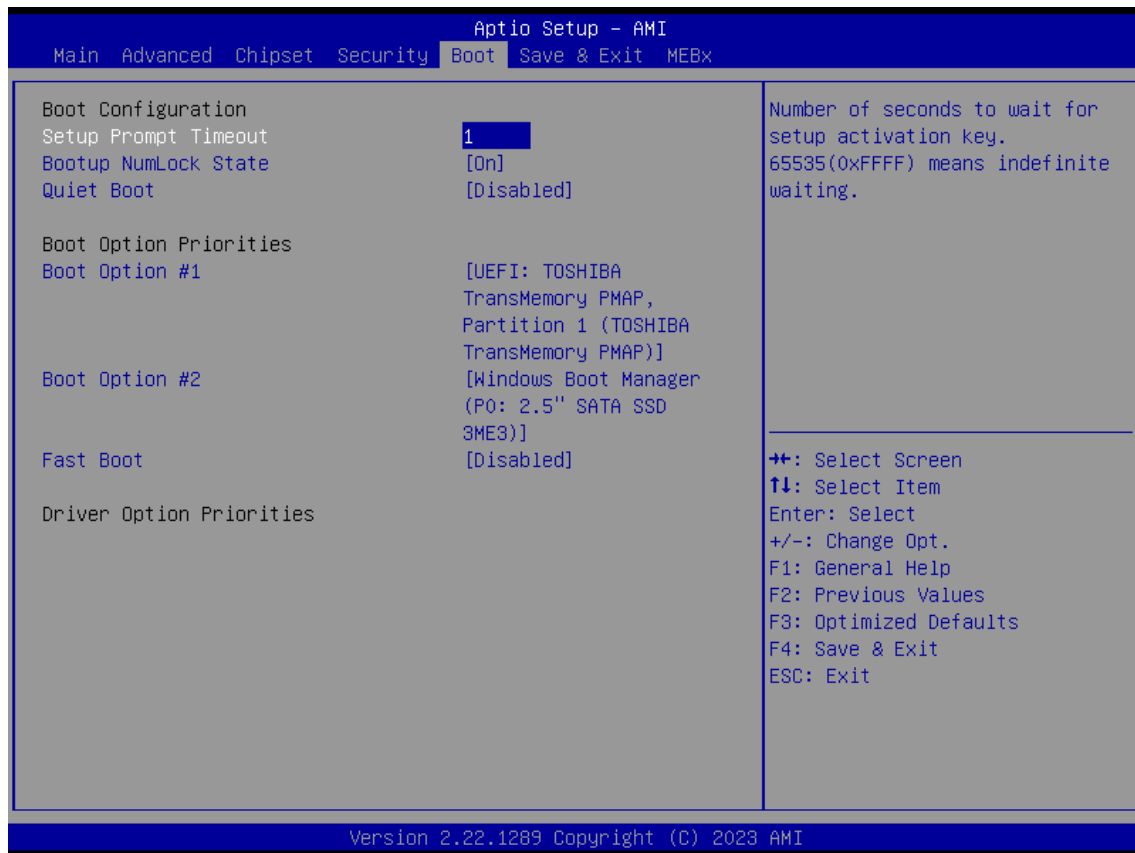

Item	Options	Description
Setup Prompt Timeout	1[Default]	Number of seconds to wait for setup activation key. 65535(0xFFFF) means indefinite waiting.
Bootup NumLock State	On[Default] , Off	Select the Keyboard NumLock state.
Quiet Boot	Disabled[Default] , Enabled	Enables or disables Quiet Boot option.
Fast Boot	Disabled[Default] , Enabled	Enables/Disables boot with initialization of a minimal set of devices required to launch active boot option. Has no effect for BBS boot options.

4.7 Save & Exit

This setting allows users to configure the boot settings.

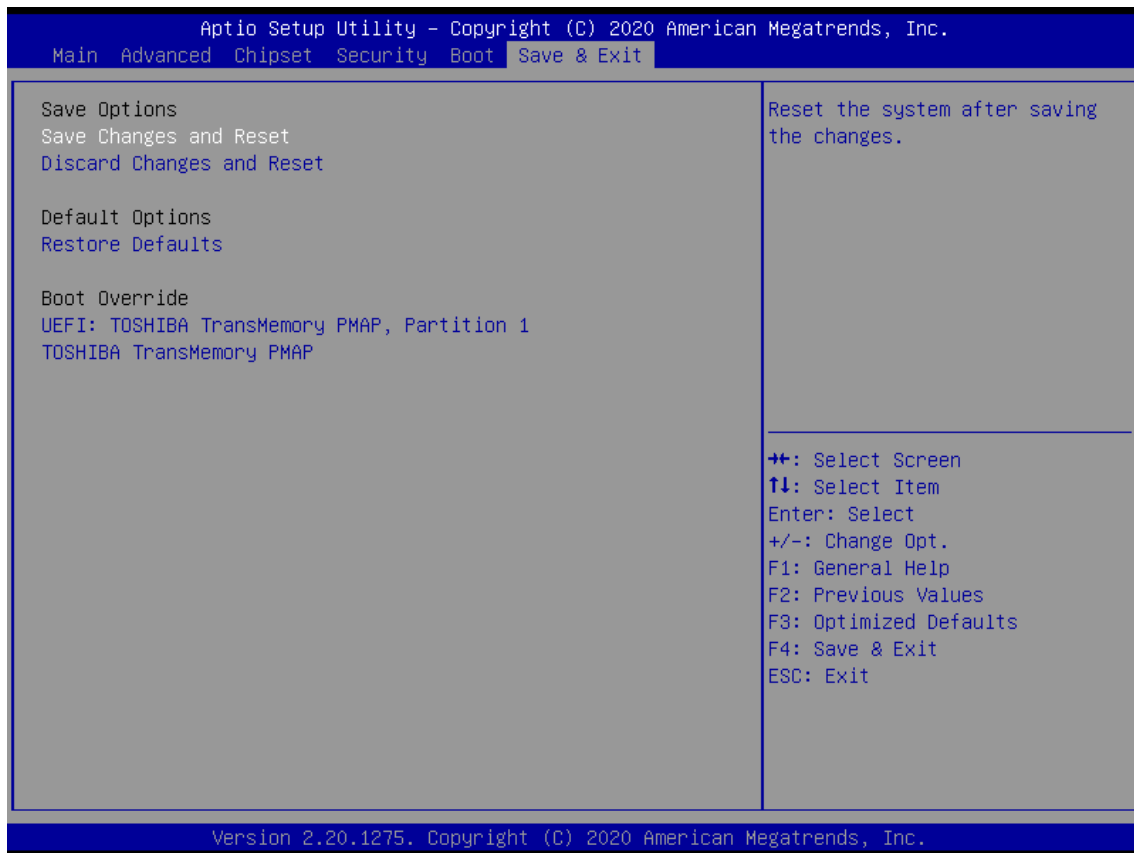

■ Save Changes and Reset

This item allows user to reset the system after saving the changes. This item allows user to reset the system after saving the changes.

■ Discard Changes and Reset

This item allows user to reset the system without saving any changes.

■ Restore Defaults

Use this item to restore /load default values for all the setup options.

4.8 MEBx



Item	Options	Description
Intel(R) ME Password		MEBx Login

Appendix

WDT & GPIO

This appendix provides the sample codes of WDT (Watch Dog Timer) and GPIO (General Purpose Input/ Output).

WDT Sample Code

WDT Setting

The WDT function is provided by Fintek F81966 , and it can be accessed through IO Address. The configuration on the RCO-6000 –ADL is described as below.

Psuedo Code

```
// IO Address 0xA16 is time value(second)
// IO Address 0xA15 is WDT enable and configuration
Example, Set 0xA16=-0x03, 0xA15=0x31, it will reset after 3 seconds
```

```
#define TimePort      0xA16
#define TimeEnablePort 0xA15
```

```
WriteByte (TimePort,0x03)
WriteByte (TimeEnablePort,0x31)
```

GPIO Sample CodeGPIO Setting

PIN#	GPIO#	Default Configuration
18	XCOM-	
17	XCOM+	
16	OUT8	DIO Output8
15	IN8	DIO Input8
14	OUT7	DIO Output7
13	IN7	DIO Input7
12	OUT6	DIO Output6
11	IN6	DIO Input6
10	OUT5	DIO Output5
9	IN5	DIO Input5
8	OUT4	DIO Output4
7	IN4	DIO Input4
6	OUT3	DIO Output3
5	IN3	DIO Input3
4	OUT2	DIO Output2
3	IN2	DIO Input2
2	OUT1	DIO Output1
1	IN1	DIO Input1

The GPIO function is provided by Nuvoton M058SSAN , and it can be accessed through Smbus/I2C port. The configuration on the RCO-6000 –ADL is described as below.

Psuedo Code

```
#define GPI_ADDR  0x02      // Define Input port Address
#define GPO_ADDR 0x01      // Define Output port Address
#define Slave_ADDR 0x80    //Slave Address = 0x80( 7-bit address)
```

```
//Set OUT1~OUT8 Value
```

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
OUT8	OUT7	OUT6	OUT5	OUT4	OUT3	OUT2	OUT1

```
//Set GPO to 0x55
```

```
//set IO_DO1,IO_DO3,IO_DO5,IO_DO7 to high; Set IO_DO2,IO_DO4,IO_DO6,IO_DO8 to Low
SmbusWrite (Slave_ADDR, GPO_ADDR, 0x55);
```

```
// Read In1~In8 value
```

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
IN8	IN7	IN6	IN5	IN4	IN3	IN2	IN1

```
Data= SmbusReads (Slave_ADDR, GPI_ADDR); //Read In1~In8 value
```

